AV RECEIVER/AV AMPLIFIER

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

SERVICE MANUAL

IMPORTANT NOTICE

This manual has been provided for the use of authorized YAMAHA Retailers and their service personnel.
It has been assumed that basic service procedures inherent to the industry, and more specifically YAMAHA Products, are already known and understood by the users, and have therefore not been restated.

WARNING: Failure to follow appropriate service and safety procedures when servicing this product may result in personal injury, destruction of expensive components, and failure of the product to perform as specified. For these reasons, we advise all YAMAHA product owners that any service required should be performed by an authorized YAMAHA Retailer or the appointed service representative.

IMPORTANT: The presentation or sale of this manual to any individual or firm does not constitute authorization, certification or recognition of any applicable technical capabilities, or establish a principle-agent relationship of any form.

The data provided is believed to be accurate and applicable to the unit(s) indicated on the cover. The research, engineering, and service departments of YAMAHA are continually striving to improve YAMAHA products. Modifications are, therefore, inevitable and specifications are subject to change without notice or obligation to retrofit. Should any discrepancy appear to exist, please contact the distributor's Service Division.

WARNING: Static discharges can destroy expensive components. Discharge any static electricity your body may have accumulated by grounding yourself to the ground buss in the unit (heavy gauge black wires connect to this buss).

IMPORTANT: Turn the unit OFF during disassembly and part replacement. Recheck all work before you apply power to the unit.

■ CONTENTS

TO SERVICE PERSONNEL 2
IMPEDANCE SELECTOR 2
FRONT PANELS ..... 3~5
REAR PANELS ..... 5~12
REMOTE CONTROL PANELS 13
SPECIFICATIONS / 参考仕様 ..... 14~17
INTERNAL VIEW 17
DISASSEMBLY PROCEDURES / 分解手順 ..... 18~20
SELF DIAGNOSIS FUNCTION (DIAG) /
自己診断機能（ダイアグ） ..... 21~42
AMP ADJUSTMENT / アンプ部調整 43
DISPLAY DATA ..... 44~45
IC DATA ..... 46~51
BLOCK DIAGRAM ..... 52~53
PRINTED CIRCUIT BOARD ..... 54~75
PIN CONNECTION DIAGRAM 76
SCHEMATIC DIAGRAM ..... 77~88
PARTS LIST ..... 89~137
REMOTE CONTROL ..... 138~139

このサービスマニュアルは、エコマーク認定の再生紙を使用しています。
This Service Manual uses recycled paper.

100846

YAMAHA
YAMAHA CORPORATION
P.O.Box 1, Hamamatsu, Japan

■ TO SERVICE PERSONNEL

1. Critical Components Information
   Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
2. Leakage Current Measurement (For 120V Models Only)
   When service has been completed, it is imperative to verify that all exposed conductive surfaces are properly insulated from supply circuits.

- Meter impedance should be equivalent to 1500 ohm shunted by 0.15µF.

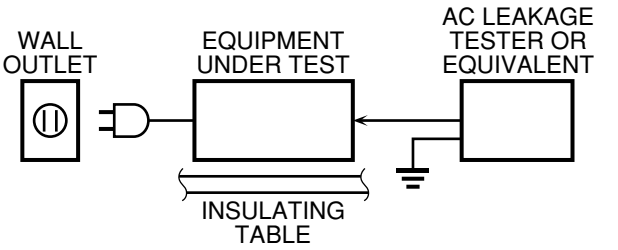

- Leakage current must not exceed 0.5mA.
- Be sure to test for leakage with the AC plug in both polarities.

"CAUTION"

"F701, 702: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE 8A, 125V FUSE."

CAUTION

F701, 702: REPLACE WITH SAME TYPE 8A, 125V FUSE.

ATTENTION

F701, 702: UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE 8A, 125V.

WARNING: CHEMICAL CONTENT NOTICE!

The solder used in the production of this product contains LEAD. In addition, other electrical/electronic and/or plastic (where applicable) components may also contain traces of chemicals found by the California Health and Welfare Agency (and possibly other entities) to cause cancer and/or birth defects or other reproductive harm.

DO NOT PLACE SOLDER, ELECTRICAL/ELECTRONIC OR PLASTIC COMPONENTS IN YOUR MOUTH FOR ANY REASON WHATSOEVER!

Avoid prolonged, unprotected contact between solder and your skin! When soldering, do not inhale solder fumes or expose eyes to solder/flux vapor!

If you come in contact with solder or components located inside the enclosure of this product, wash your hands before handling food.

■ IMPEDANCE SELECTOR

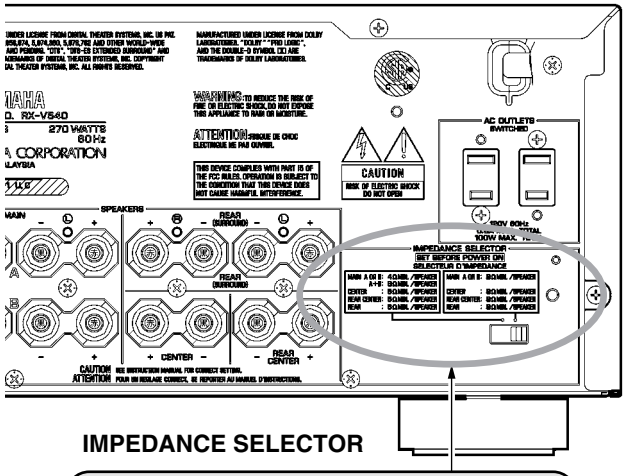

IMPEDANCE SELECTOR

WARNING:
Do not change the IMPEDANCE SELECTOR switch setting while the power to this unit is on, otherwise this unit may be damaged.

• DIMENSIONS / 寸法図

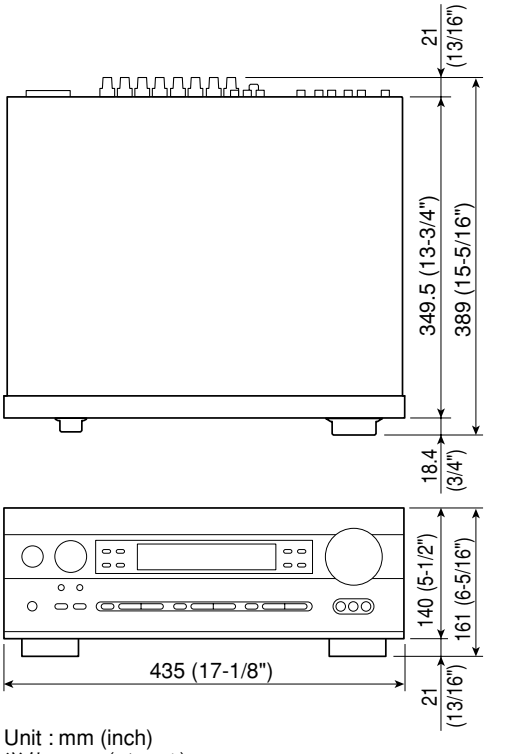

Unit : mm (inch)
単位: mm（インチ）

■ FRONT PANELS

RX-V540 (U, C, A, L, R, T, K models)

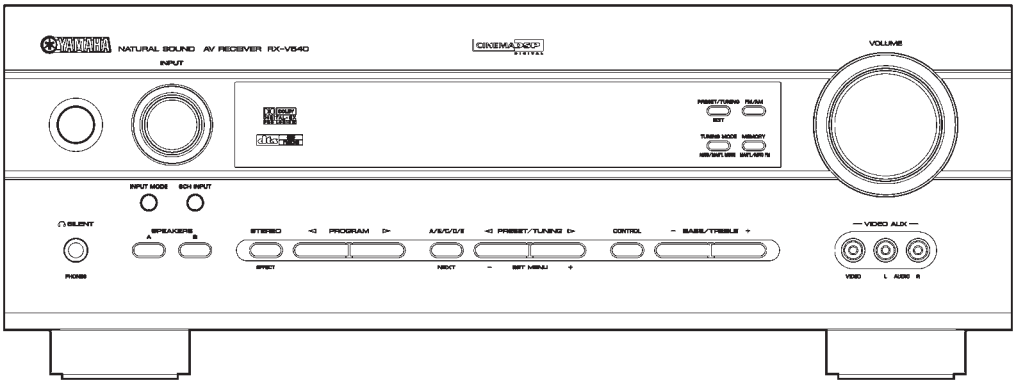

RX-V540RDS (B, G models)

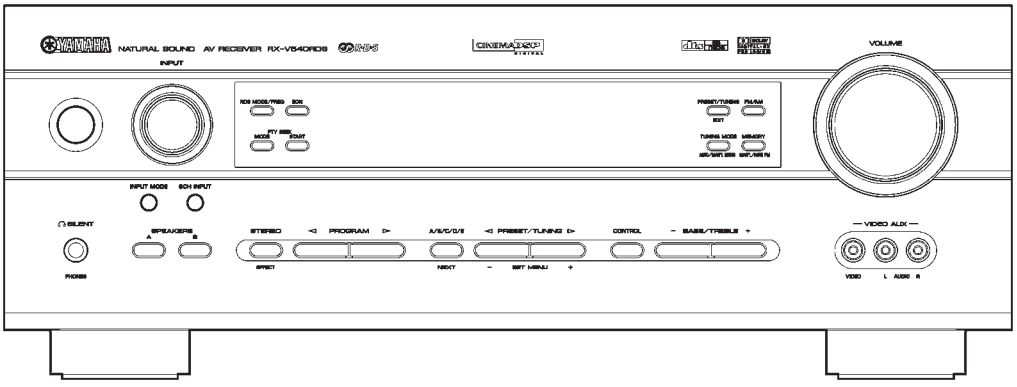

HTR-5650 (U, C, A, T, K models)

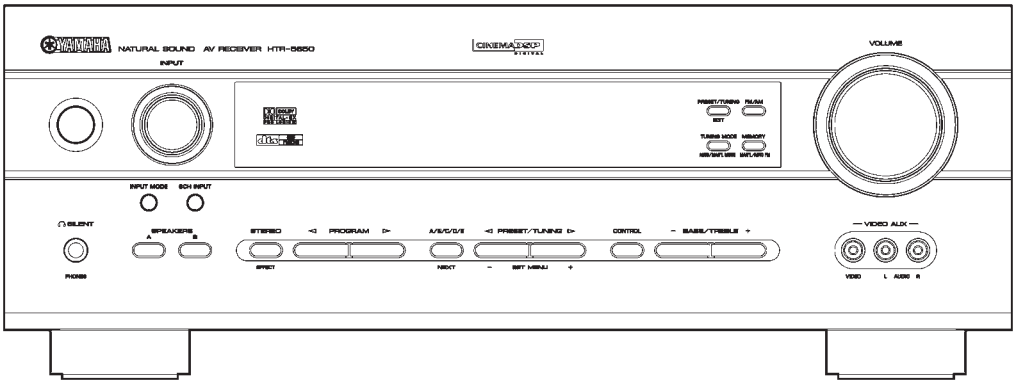

HTR-5650RDS (B, G models)

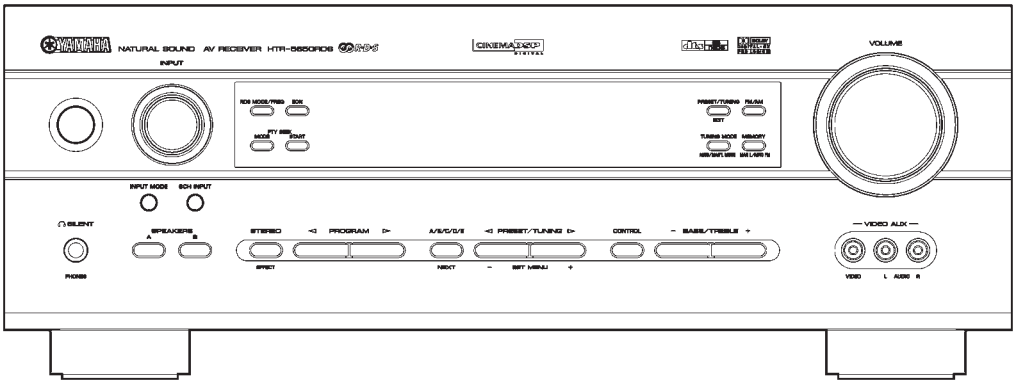

DSP-AX540 (J model)

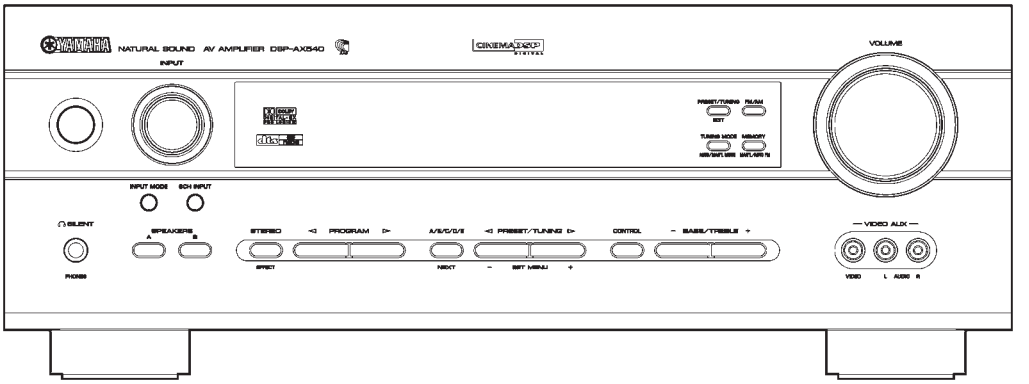

RX-V440 (U, C, A, L, R, T, K models)

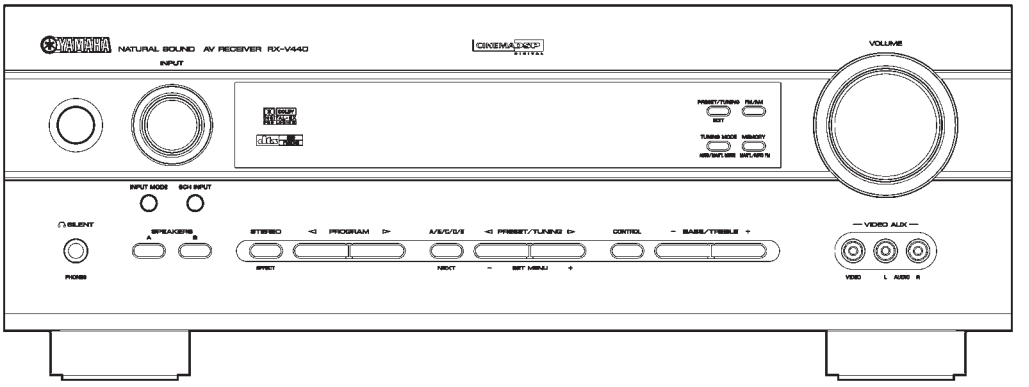

RX-V440RDS (B, G models)

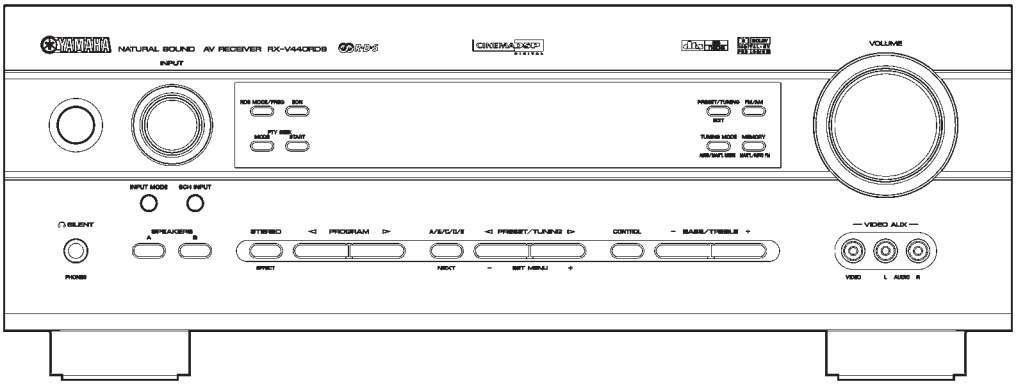

HTR-5640 (U, C, A, T, K models)

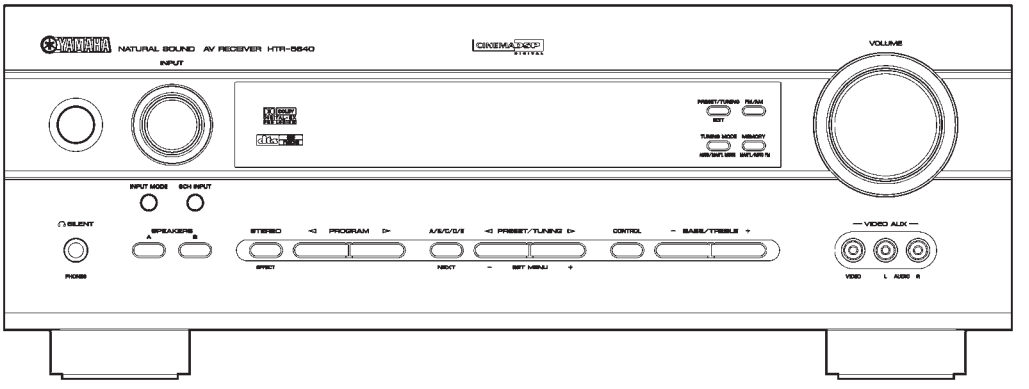

HTR-5640RDS (B, G models)

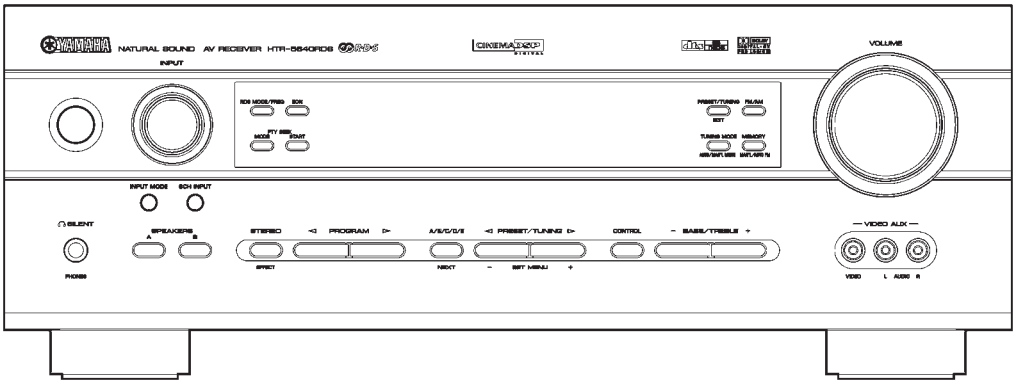

DSP-AX440 (J model)

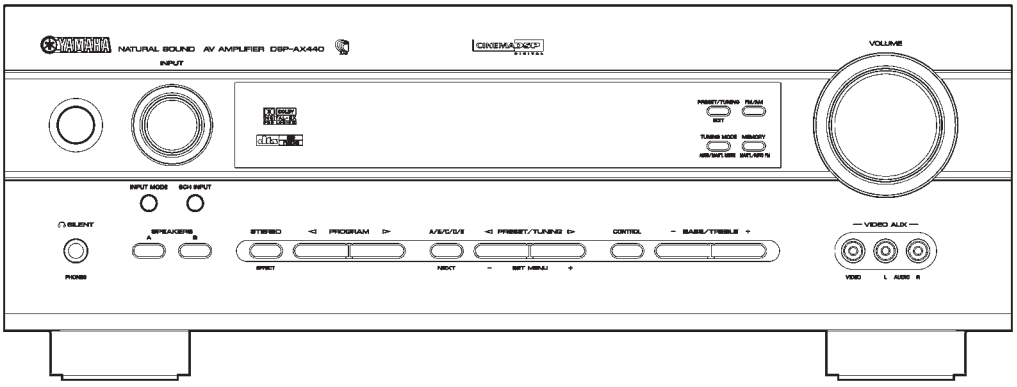

■ REAR PANELS

RX-V540 (U, C models)

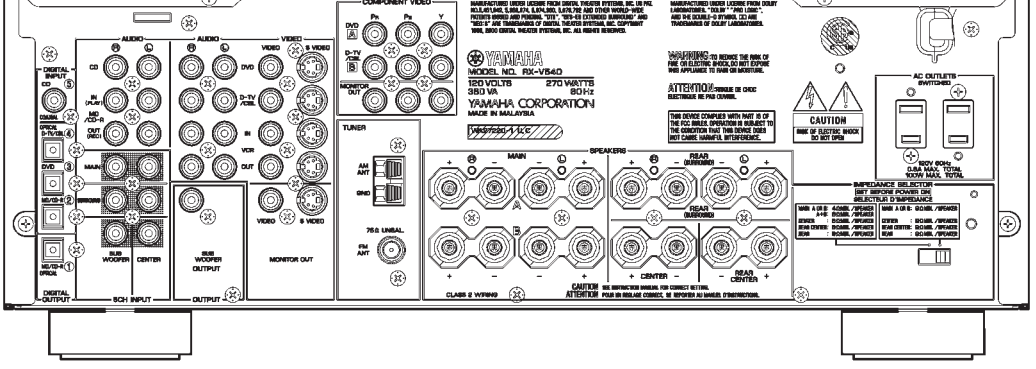

RX-V540 (A model)

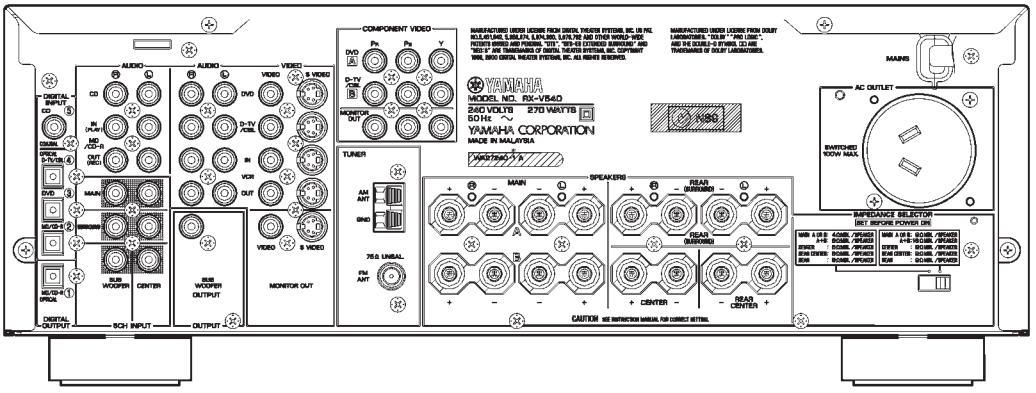

RX-V540 (L model)

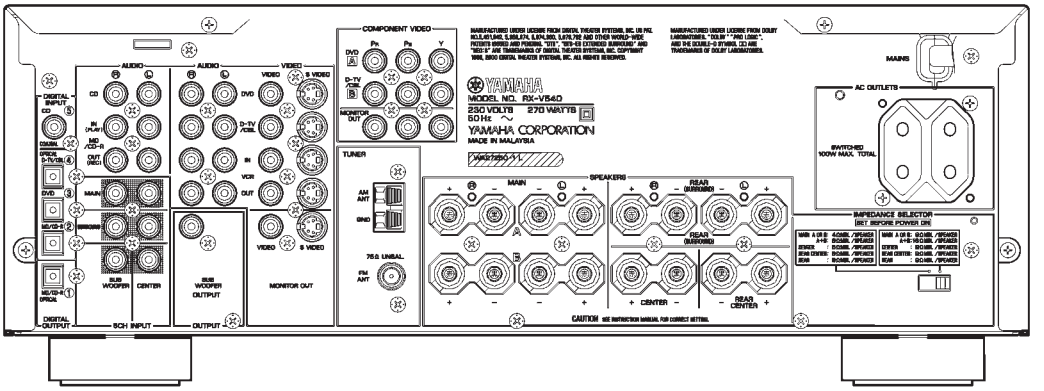

RX-V540 (R model)

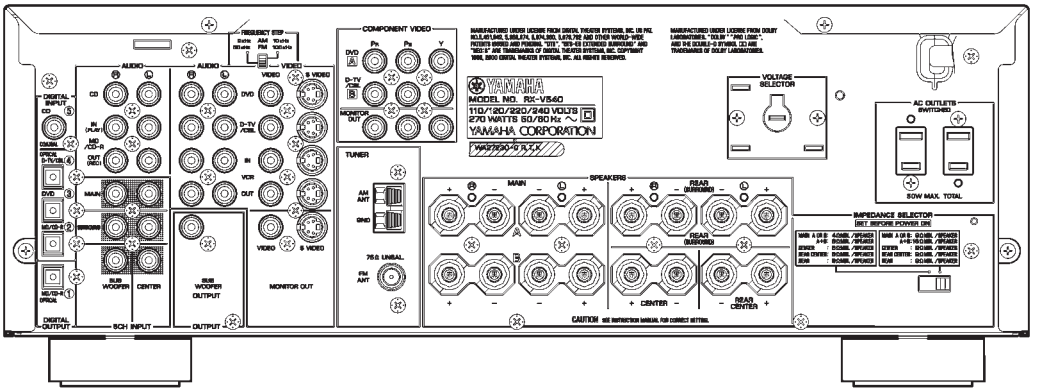

RX-V540 (T model)

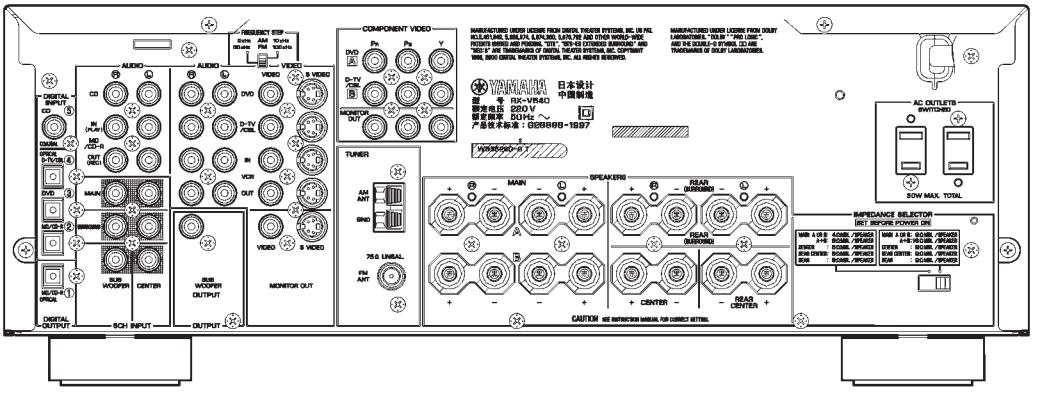

RX-V540 (K model)

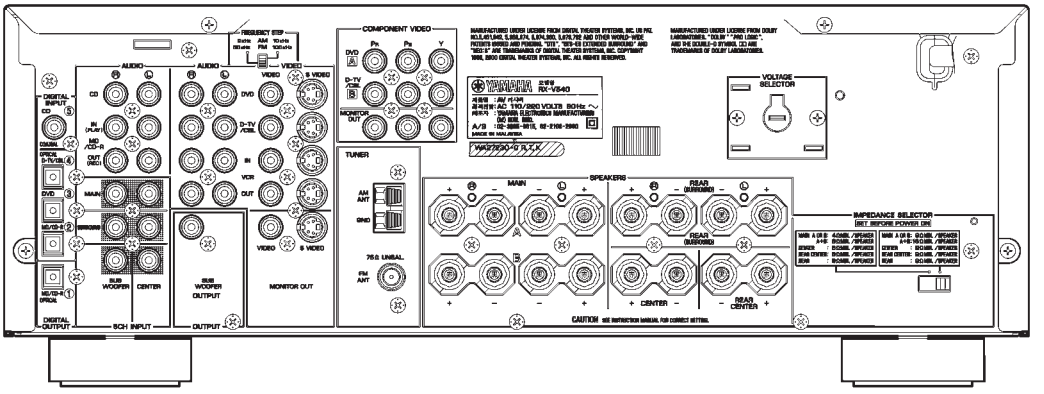

RX-V540RDS (B model)

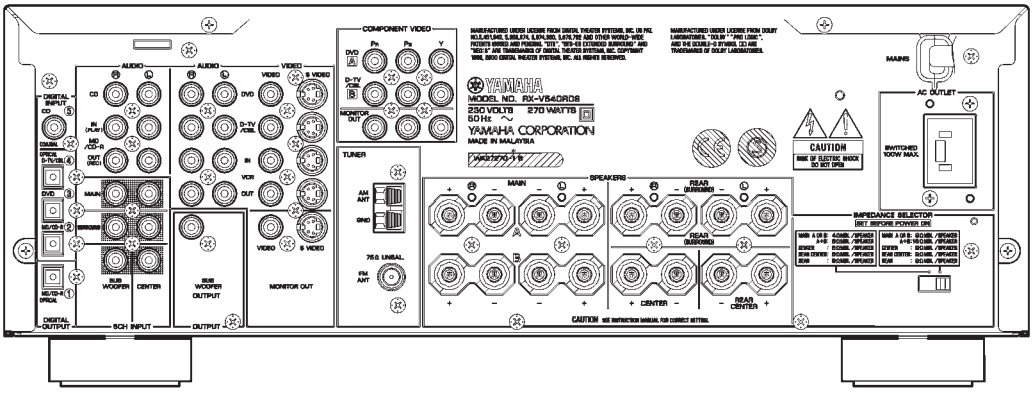

RX-V540RDS (G model)

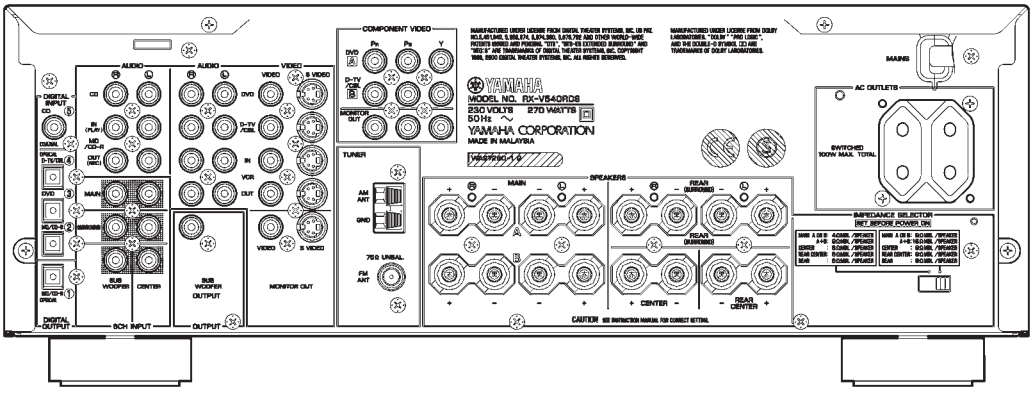

HTR-5650 (U, C models)

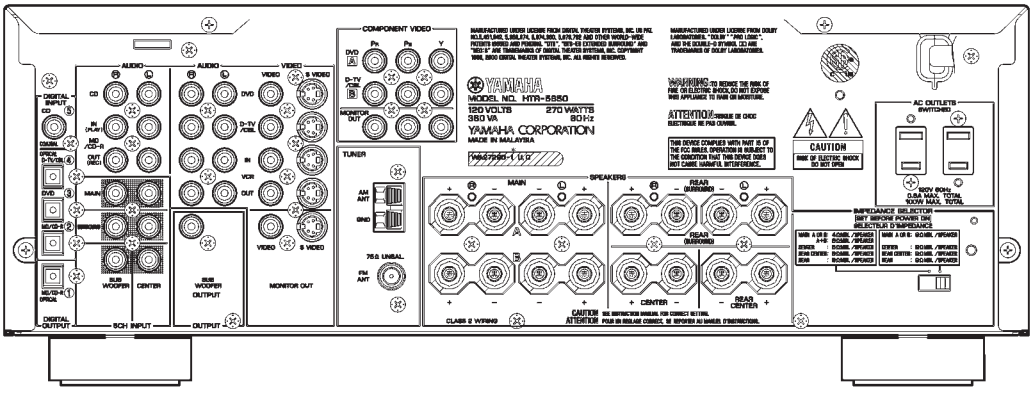

HTR-5650 (A model)

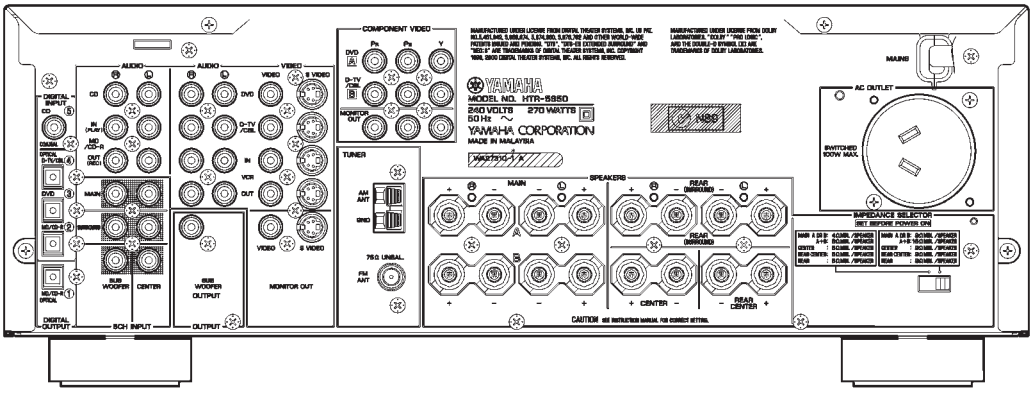

HTR-5650 (T model)

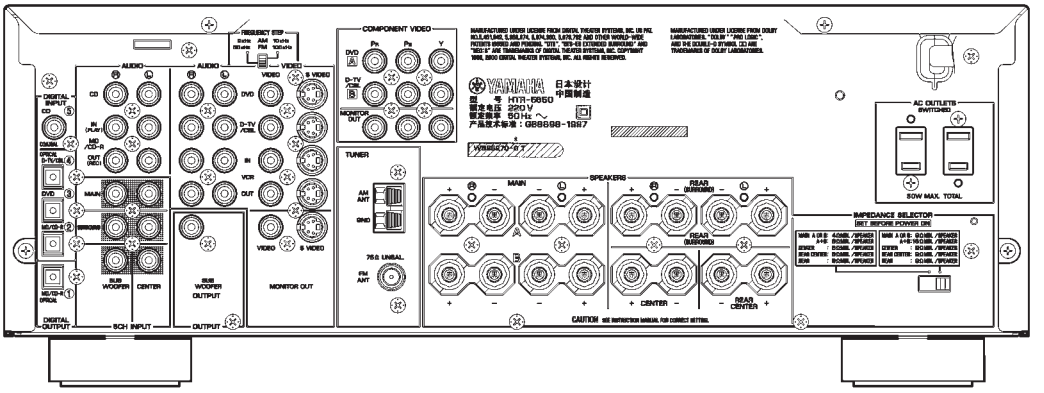

HTR-5650 (K model)

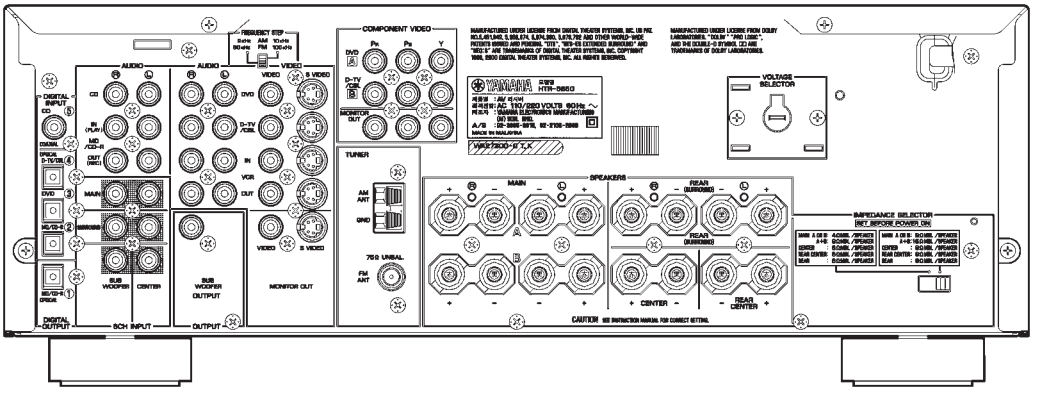

HTR-5650RDS (B model)

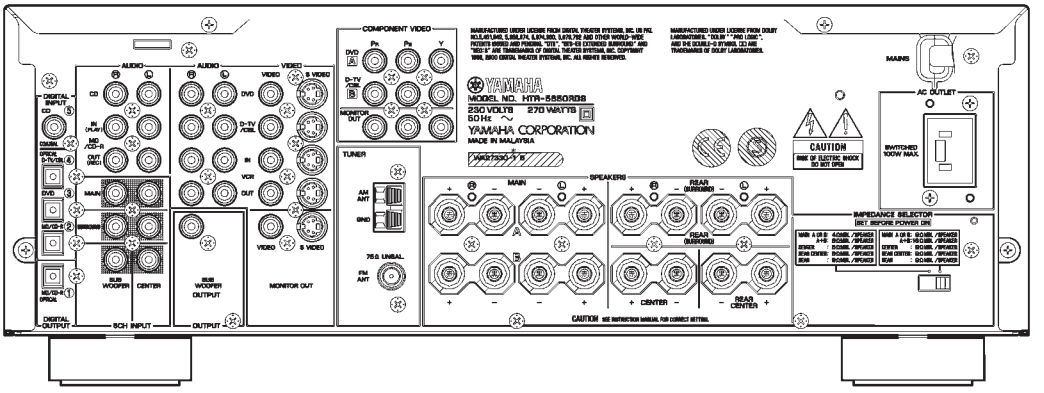

HTR-5650RDS (G model)

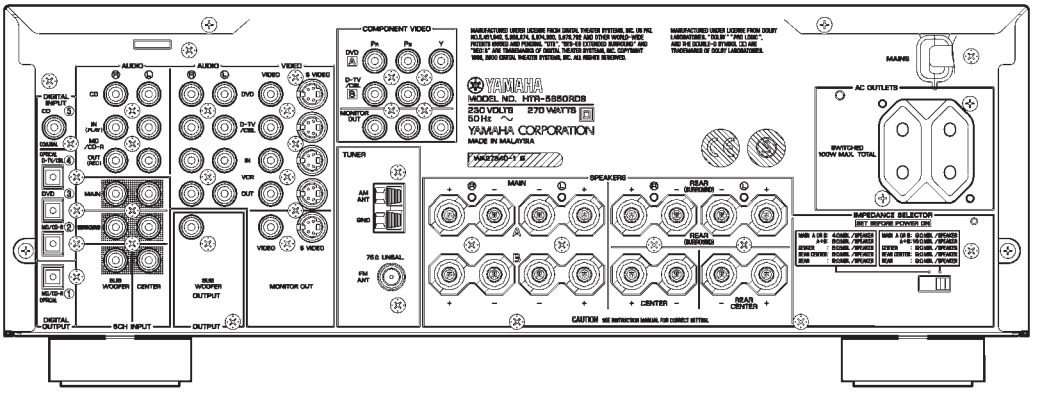

DSP-AX540 (J model)

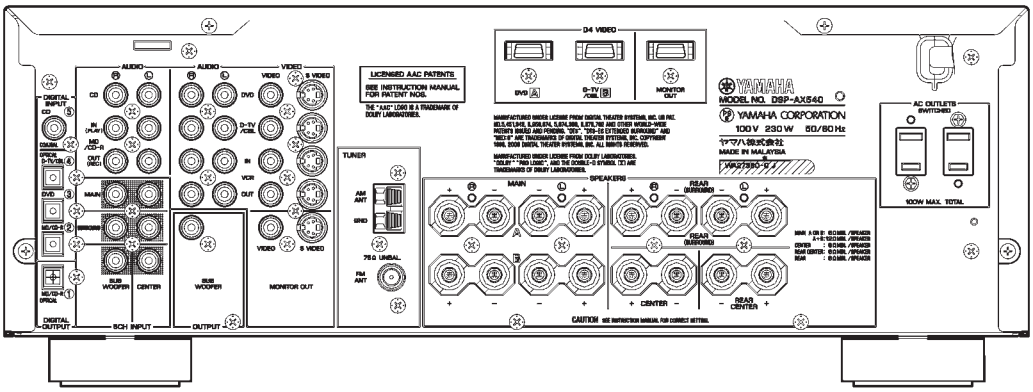

RX-V440 (U, C models)

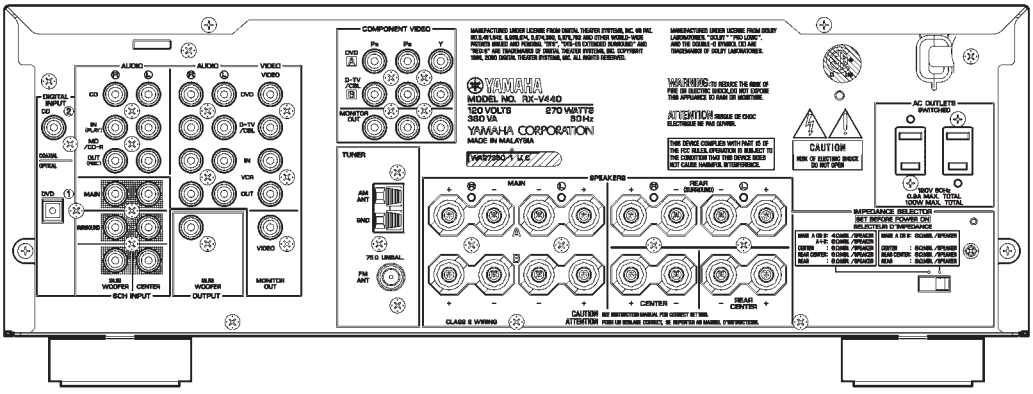

RX-V440 (A model)

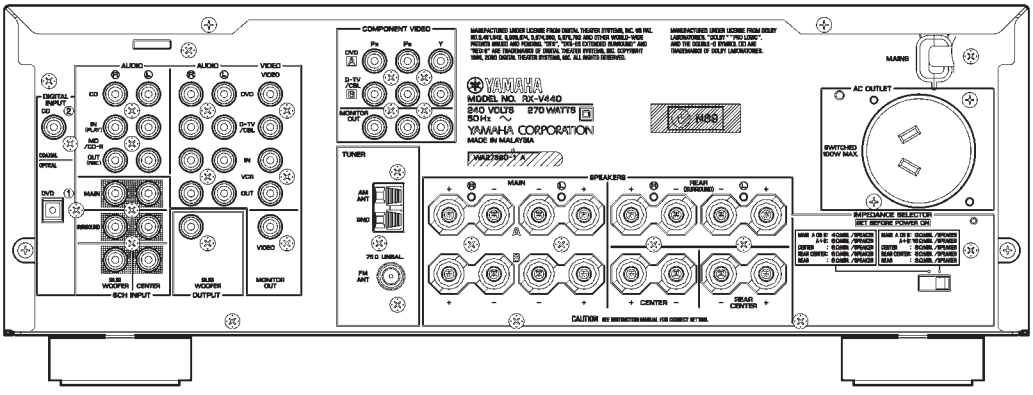

RX-V440 (L model)

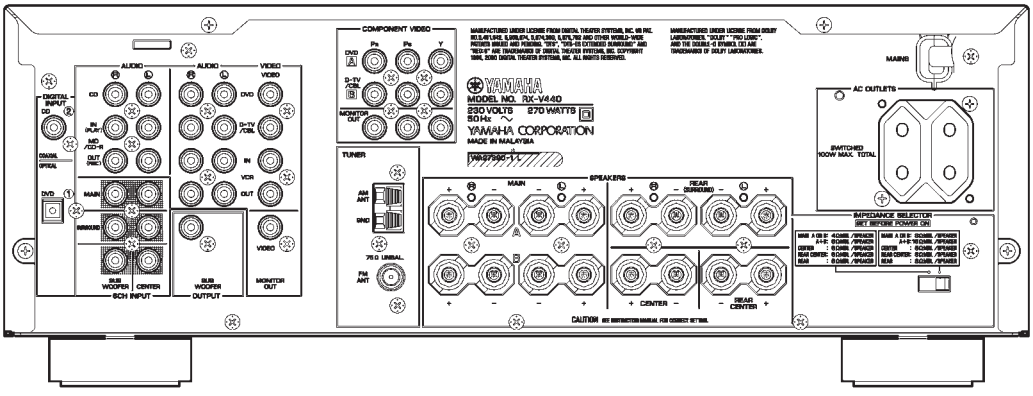

RX-V440 (R model)

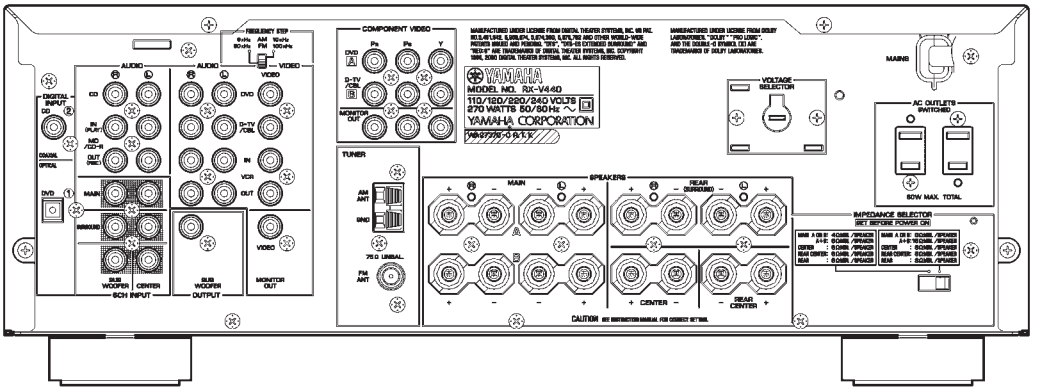

RX-V440 (T model)

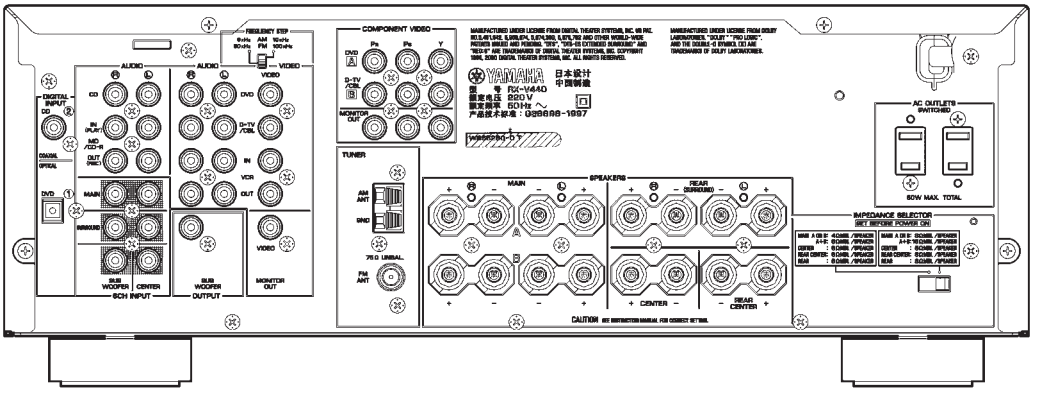

RX-V440 (K model)

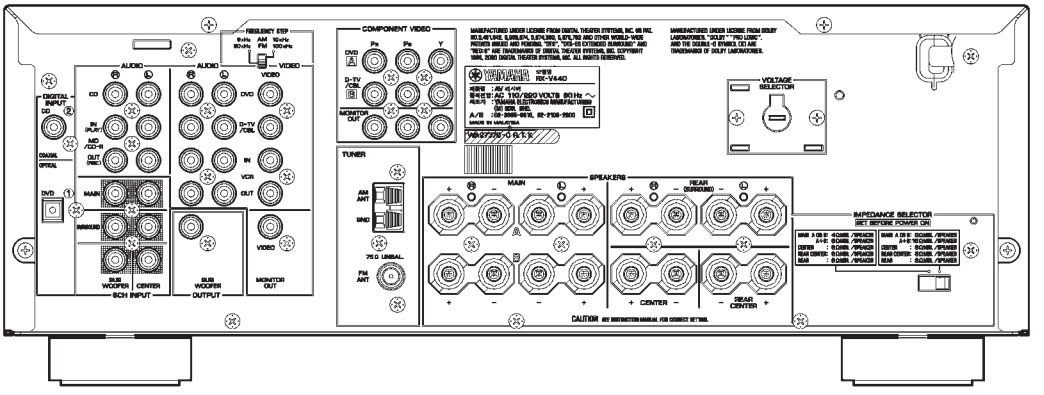

RX-V440RDS (B model)

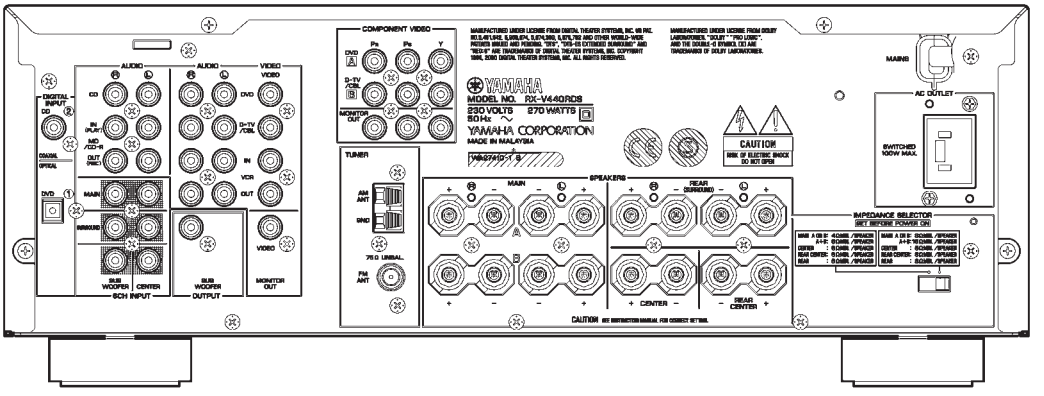

RX-V440RDS (G model)

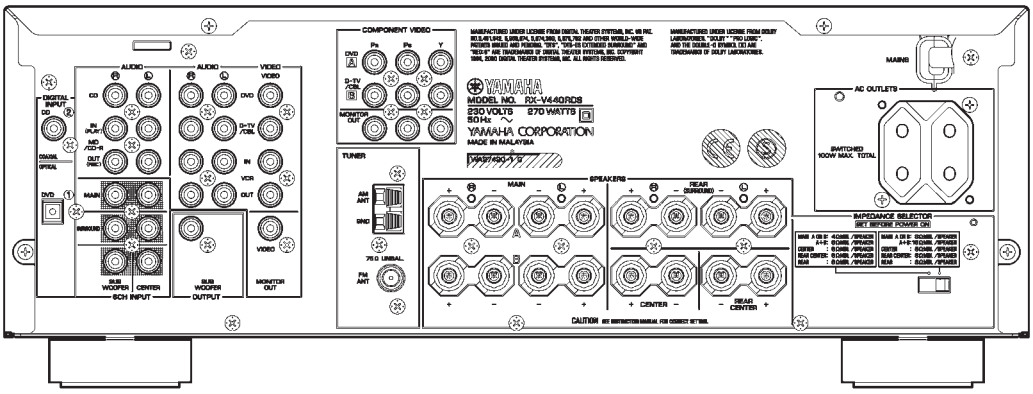

HTR-5640 (U, C models)

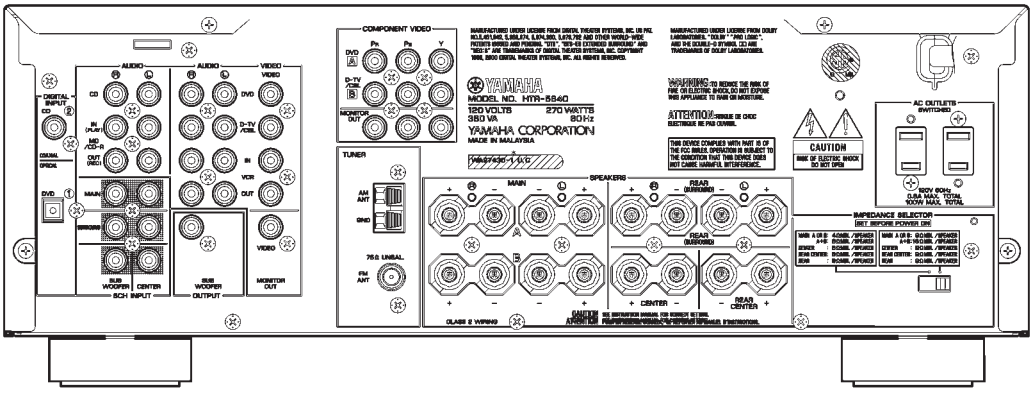

HTR-5640 (A model)

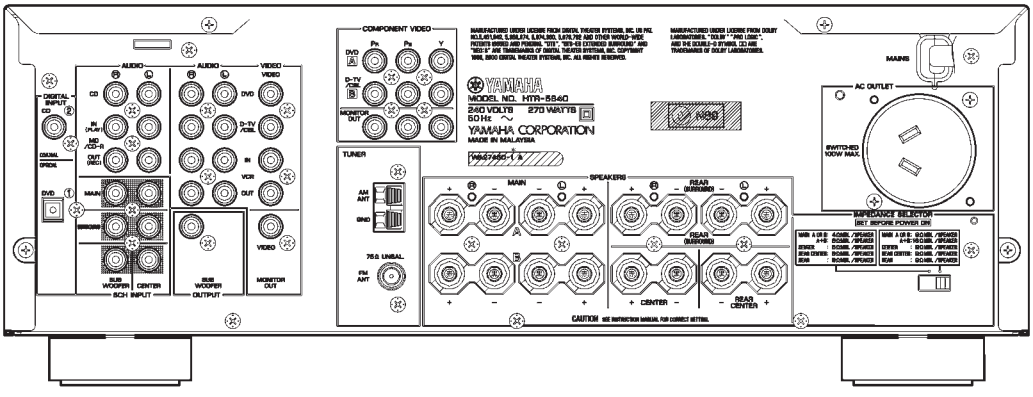

HTR-5640 (T model)

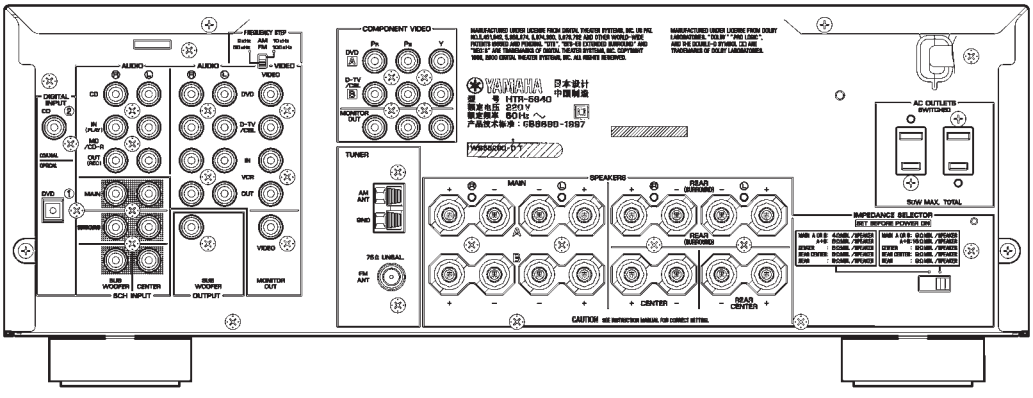

HTR-5640 (K model)

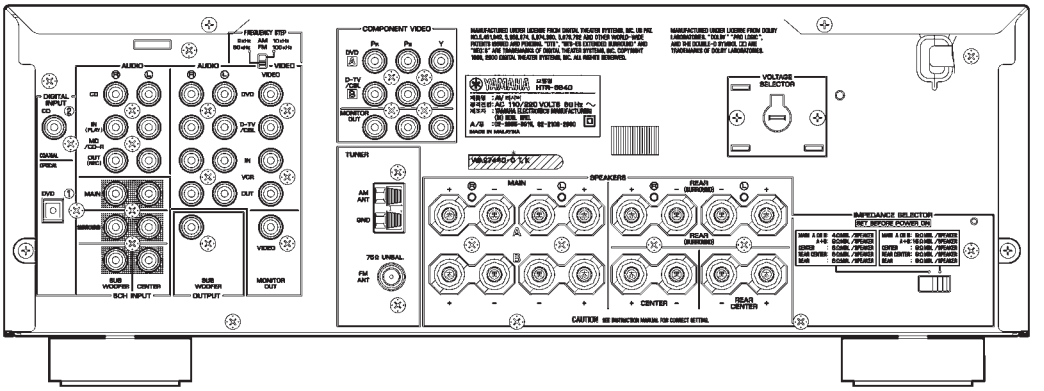

HTR-5640RDS (B model)

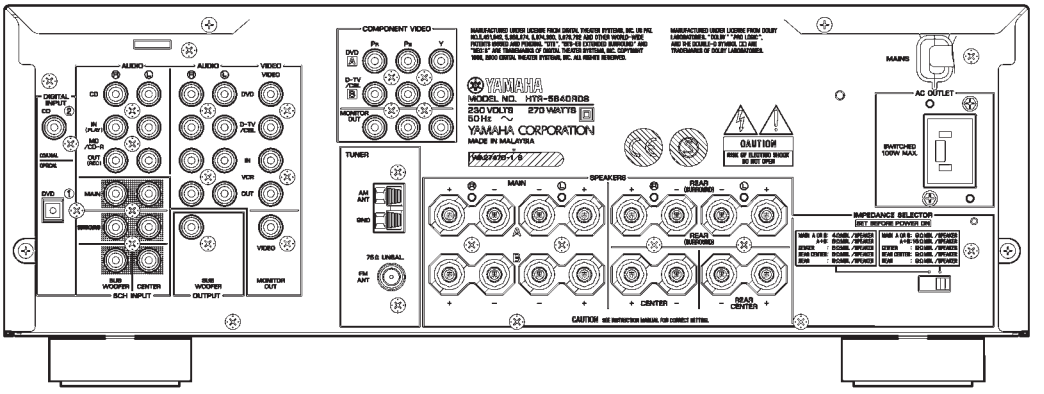

HTR-5640RDS (G model)

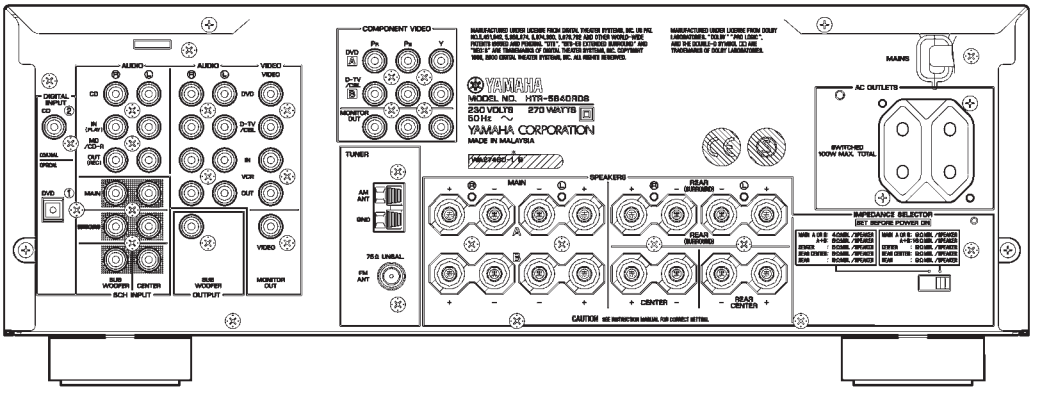

DSP-AX440 (J model)

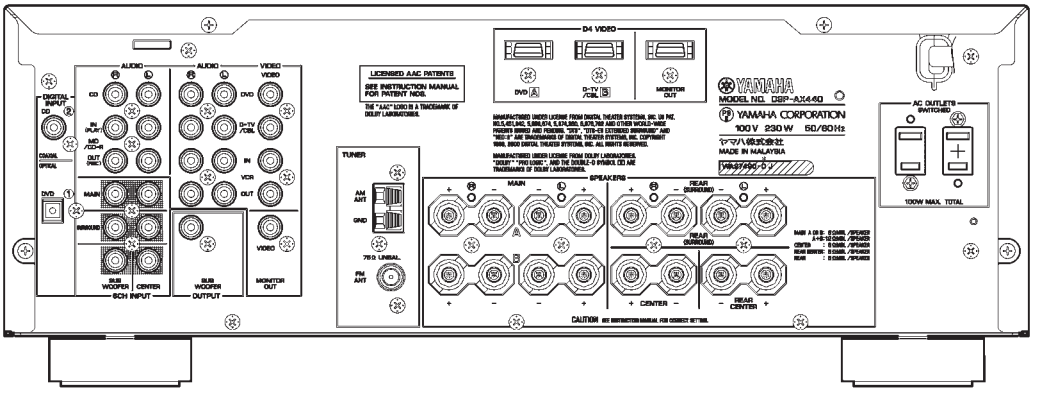

■ REMOTE CONTROL PANELS

RX-V540 (U, C, A, L, R, T, K models)
HTR-5650 (U, C, A, T, K models)
DSP-AX540 (J model)
RX-V440 (U, C, A, L, R, T, K models)
HTR-5640 (U, C, A, T, K models)
DSP-AX440 (J model)

RX-V540RDS (B, G models)
HTR-5650RDS (B, G models)

RX-V440RDS (B, G models)
HTR-5640RDS (B, G models)

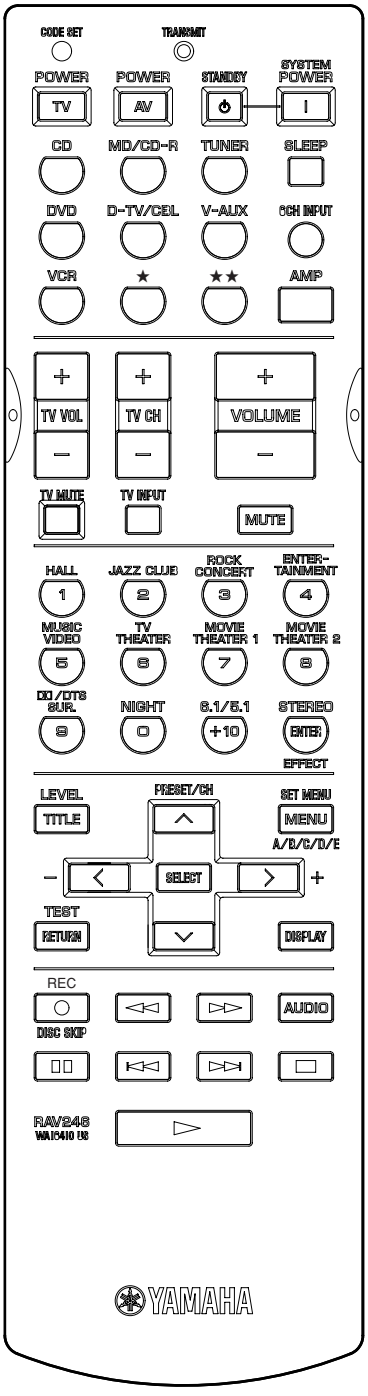

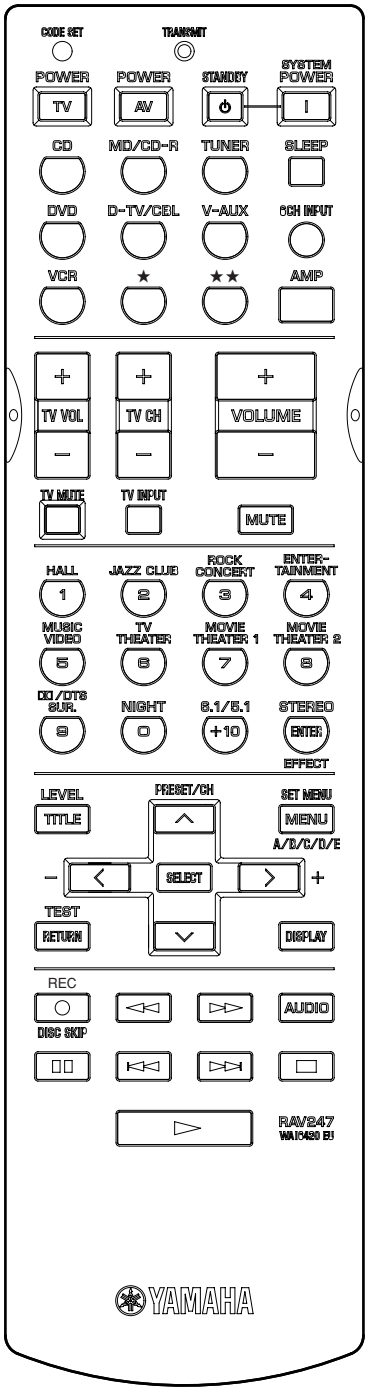

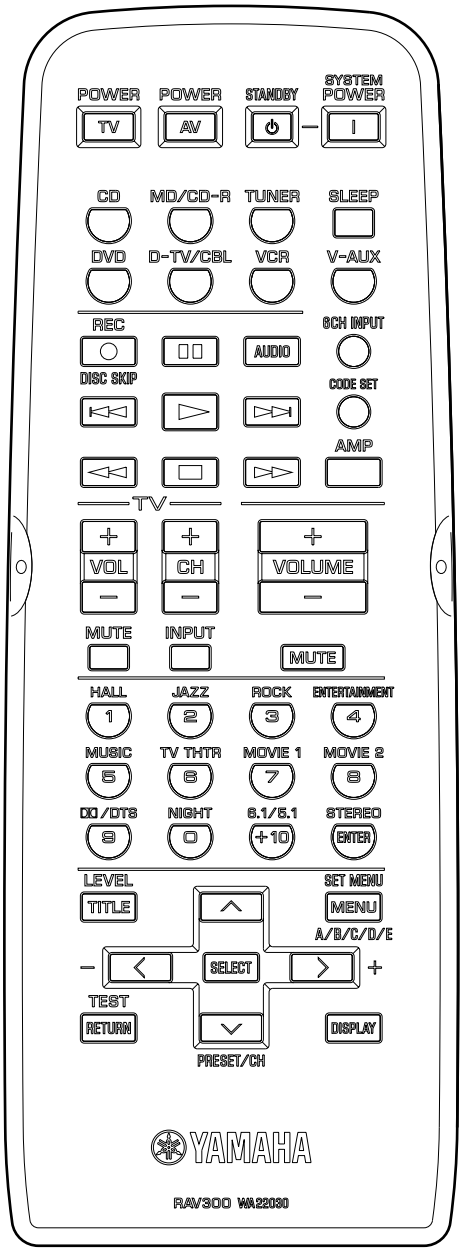

■ SPECIFICATIONS / 参考仕様

■ Audio Section / オーディオ部

Minimum RMS Output Power (Power Amp. Section) / 定格出力 (パワーアンプ部)

[RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540]

(20 Hz to 20 kHz)

MAIN L/R
- U, C models (0.06% THD, 8 ohms) ..... (FTC) 80W + 80W
- A, B, G, L, R, T, K models (0.06% THD, 8 ohms) ... 70W + 70W
- J model (0.09% THD, 6 ohms) ..... 80W + 80W

CENTER, REAR CENTER
- U, C models (0.06% THD, 8 ohms) ..... (FTC) 80W + 80W
- A, B, G, L, R, T, K models (0.06% THD, 8 ohms) ... 70W + 70W
- J model (0.09% THD, 6 ohms) ..... 80W + 80W

REAR L/R
- U, C models (0.06% THD, 8 ohms) ..... (FTC) 80W + 80W
- A, B, G, L, R, T, K models (0.06% THD, 8 ohms) ... 70W + 70W
- J model (0.09% THD, 6 ohms) ..... 80W + 80W

(1 kHz)

MAIN L/R
- U, C models (0.7% THD, 8 ohms) ..... (FTC) 95W + 95W
- R, T, K models (0.7% THD, 8 ohms) ..... 85W + 85W

CENTER, REAR CENTER
- U, C models (0.7% THD, 8 ohms) ..... (FTC) 95W + 95W
- R, T, K models (0.7% THD, 8 ohms) ..... 85W + 85W

REAR L/R
- U, C models (0.7% THD, 8 ohms) ..... (FTC) 95W + 95W
- R, T, K models (0.7% THD, 8 ohms) ..... 85W + 85W

[RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440]

(20 Hz to 20 kHz)

MAIN L/R
- U, C models (0.06% THD, 8 ohms) ..... (FTC) 75W + 75W
- A, B, G, L, R, T, K models (0.06% THD, 8 ohms) ... 65W + 65W
- J model (0.09% THD, 6 ohms) ..... 75W + 75W

CENTER, REAR CENTER
- U, C models (0.06% THD, 8 ohms) ..... (FTC) 75W + 75W
- A, B, G, L, R, T, K models (0.06% THD, 8 ohms) ... 65W + 65W
- J model (0.09% THD, 6 ohms) ..... 75W + 75W

REAR L/R
- U, C models (0.06% THD, 8 ohms) ..... (FTC) 75W + 75W
- A, B, G, L, R, T, K models (0.06% THD, 8 ohms) ... 65W + 65W
- J model (0.09% THD, 6 ohms) ..... 75W + 75W

(1 kHz)

MAIN L/R
- U, C models (0.7% THD, 8 ohms) ..... (FTC) 90W + 90W
- T, K, A, B, G models (0.7% THD, 8 ohms) ..... 80W + 80W

CENTER, REAR CENTER
- U, C models (0.7% THD, 8 ohms) ..... (FTC) 90W + 90W
- T, K, A, B, G models (0.7% THD, 8 ohms) ..... 80W + 80W

REAR L/R
- U, C models (0.7% THD, 8 ohms) ..... (FTC) 90W + 90W
- T, K, A, B, G models (0.7% THD, 8 ohms) ..... 80W + 80W

Maximum Power / 実用最大出力 (EIAJ, 1kHz, 10% THD)

[RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540]

MAIN L/R
- R, T, K models (8 ohms) ..... 100W + 100W
- J model (6 ohms) ..... 110W + 110W

CENTER, REAR CENTER
- R, T, K models (8 ohms) ..... 100W + 100W
- J model (6 ohms) ..... 110W + 110W

REAR L/R
- R, T, K models (8 ohms) ..... 100W + 100W
- J model (6 ohms) ..... 110W + 110W

[RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440]

MAIN L/R
- R, T, K models (8 ohms) ..... 95W + 95W
- J model (6 ohms) ..... 100W + 100W

CENTER, REAR CENTER
- R, T, K models (8 ohms) ..... 95W + 95W
- J model (6 ohms) ..... 100W + 100W

REAR L/R
- R, T, K models (8 ohms) ..... 95W + 95W
- J model (6 ohms) ..... 100W + 100W

DIN Standard Output Power Per Channel / DINパワー [B, G, L models]

[RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540]

(1 kHz, 0.7% THD, 4 ohms)
- MAIN L/R ..... 115W + 115W
- CENTER, REAR CENTER ..... 115W + 115W
- REAR L/R ..... 115W + 115W

[RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440]

(1 kHz, 0.7% THD, 4 ohms)
- MAIN L/R ..... 110W + 110W
- CENTER, REAR CENTER ..... 110W + 110W
- REAR L/R ..... 110W + 110W

IEC Power / IECパワー [B, G, L models]

[RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540]

1 kHz, 0.06% THD, 8 ohms ..... 80W + 80W

[RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440]

1 kHz, 0.06% THD, 8 ohms ..... 75W + 75W

Dynamic Power Per Channel / ダイナミックパワー (IHF)

[RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540]
- U, C models (8/6/4/2 ohms) 100/125/160/200W
- A, B, G, L, R, T, K models (8/6/4/2 ohms) 90/110/145/180W
- J model (6/4/2 ohms) 110/145/180W

[RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440]
- U, C models (8/6/4/2 ohms) 95/120/150/190W
- A, B, G, L, R, T, K models (8/6/4/2 ohms) 85/105/140/170W
- J model (6/4/2 ohms) 105/140/170W

Dynamic Headroom / ダイナミックヘッドルーム
- U, C models (8 ohms) 1.0dB

Damping Factor / ダンピングファクタ
- 20 Hz to 20 kHz, SPEAKER-A, 8 ohms ..... 100 or more

Input Sensitivity / Input Impedance (入力感度/入力インピーダンス)
- CD, etc. ..... 150 mV / 47 k-ohms
- EXT. DECODER
  - MAIN L/R, CENTER, SURROUND L/R, SUB WOOFER ..... 150 mV / 47 k-ohms

Maximum Input Signal Level / 最大許容入力

(1 kHz, 0.5% THD, Effect On)
- CD, etc. 2.0V

Output Level / Output Impedance (出力電圧/出力インピーダンス)
- REC OUT ..... 150 mV / 1.2 k-ohms
- SUB WOOFER (MAIN SP: Small) ..... 4 V / 1.2 k-ohms

Headphone Jack Rated Output / Impedance (ヘッドフォン出力/出力インピーダンス)
- CD, etc. (1 kHz, 35 mV, 8 ohms) ..... 150 mV / 100 ohms

Frequency Response / 周波数特性
- CD, etc. to MAIN L/R (10 Hz to 100 kHz) ..... +0/-3.0dB

Total Harmonic Distortion / 全高調波歪率

(20Hz to 20kHz, 40W, 8 ohms)
- CD, etc. (Effect Off) to MAIN L/R SP OUT ..... 0.06% or less

Signal to Noise Ratio / 信号対雑音比 (IHF-A network)
- CD, etc. (Input shorted, EFFECT OFF) to MAIN L/R 250mV ..... 100dB or more

Residual Noise / 残留ノイズ (IHF-A network)
- MAIN L/R SP OUT ..... 150μV or less

Channel Separation / チャンネルセパレーション

(Vol -30 dB, Effect Off)
- CD, etc. (Input 5.1 k-ohms shorted, 1 kHz/10 kHz) ... 60 dB or more/45 dB or more

Tone Control Characteristics / トーンコントロール特性

BASS
- Boost/Cut ..... ±10dB (60Hz)

TREBLE
- Boost/Cut ..... ±10dB (20kHz)

Filter Characteristics / フィルター特性
- MAIN, REAR L/R SP Small (H.P.F.) ..... 90Hz / 12dB oct.
- SUBWOOFER (L.P.F.) ..... 90Hz / 18dB oct.

■ Video Section / ビデオ部

Video Signal Type / ビデオ信号方式
- U, C, J models ..... NTSC
- A, B, G, L models ..... PAL
- R, T, K models ..... NTSC or PAL

Video Signal Level / ビデオ信号
- ..... 1 Vp-p / 75 ohms

S-Video Signal Level / Sビデオ信号

[RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540]
- Y ..... 1 Vp-p / 75 ohms
- C ..... 0.286 Vp-p / 75 ohms

Component Signal Level / コンポーネントビデオ信号
- Y ..... 1 Vp-p / 75 ohms
- Cb/Cr ..... 0.7 Vp-p / 75 ohms

Maximum Input Level / 最大許容入力
- ..... 1.5 Vp-p

Signal to Noise Ratio / 信号対雑音比
- ..... 50 dB or more

Monitor Out Frequency Response / モニターアウト周波数帯域
[RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540]
Video Signal Level, S-Video Signal Level ... 5 Hz to 10 MHz, -3 dB
Component Video Signal Level [U, C, A, B, G, L, R, T, K models] ..... DC to 30 MHz, -3 dB
D4-Video Signal Level [J model] ..... DC to 60 MHz, -3 dB
[RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440]
Video Signal Level ..... 5 Hz to 10 MHz, -3 dB
Component Video Signal Level [U, C, A, B, G, L, R, T, K models] ..... 5 Hz to 30 MHz, -3 dB
D4-Video Signal Level [J model] ..... DC to 60 MHz, -3 dB

■ FM Section / FM部

Tuning Range
U, C models ..... 87.5 to 107.9 MHz
A, B, G, L, K models ..... 87.5 to 108.0 MHz
R, T models ..... 87.5 to 108.0 / 87.50 to 108.00 MHz
J model ..... 76.0 to 90.0 MHz
50dB Quieting Sensitivity / 50dB SN感度 (IHF)
(1kHz, 100% Mod.)
Mono ..... 2.0 µV (17.3 dBf)
Stereo ..... 25 µV (39.2 dBf)
Usable Sensitivity / 実用感度 (IHF)
Mono ..... 1.0 µV (11.2 dBf)
Selectivity / 選択度
at 400 kHz ..... 70 dB
Signal to Noise Ratio / 信号対雑音比 (IHF)
Mono / Stereo ..... 76 dB / 70 dB
Harmonic Distortion / 歪率
(1 kHz)
Mono/Stereo ..... 0.2 / 0.3 %
Stereo Separation / ステレオセパレーション
1 kHz ..... 42 dB
Frequency Response / 周波数特性
20 Hz to 15 kHz ..... +0.5 / -2 dB
Antenna Input / アンテナ入力
..... 75 ohms unbalanced

■ AM Section / AM部

Tuning Range / 受信周波数範囲
U, C models ..... 530 to 1,710 kHz
A, B, G, L, K, J models ..... 531 to 1,611 kHz
R, T models ..... 530 to 1,710 / 531 to 1,611 kHz
Usable Sensitivity / 実用感度
..... 300 µV/m
Antenna / アンテナ入力
..... Loop Antenna

■ General / 総合

Power Supply / 電源電圧
U, C models ..... AC 120 V, 60 Hz
A model ..... AC 240 V, 50 Hz
B, G, L models ..... AC 230 V, 50 Hz
R model ..... AC 110/120/220/240 V, 50/60 Hz
T model ..... AC 220 V, 50 Hz
K model ..... AC 220 V, 60 Hz
J model ..... AC 100V, 50/60 Hz
Power Consumption / 消費電力
U, C models ..... 270 W / 360 VA
A, B, G, L, R, T, K models ..... 270 W
J model ..... 220 W
Standby Power Consumption (reference data) / 待機電力(参考値)
U, C models ..... 0.7 W
A, B, G, L models ..... 0.8 W
J model ..... 0.9 W
Maximum Power Consumption [R model]
(5ch Drive, 10% THD)
RX-V540 (R model) ..... 550 W
RX-V440 (R model) ..... 500 W
AC Outlets / ACアウトレット
2 switched outlets
U, C, G, L, J models ..... 100 W max. total
R, T models ..... 50 W max. total
1 switched outlet
A, B models ..... 100W max.
Dimensions / 寸法 (W x H x D)
..... 435 x 161 x 390 mm (17-1/8" x 6-5/16" x 15-3/8")
Weight / 重量
..... 11.0 kg (24 lbs. 4 oz.)

Finish / 仕上げ
RX-V540 ..... Gold color (L, R, T, K) models
Black color (U, C, A, R) models
RX-V440 ..... Gold color (L, R, T, K) models
Black color (U, C, A, R) models
Silver color (L, R) models
RX-V540RDS/RX-V440RDS ... Gold color (G) model
Black color (B, G) models
Titanium color (B, G) models
HTR-5650 ..... Gold color (T, K) models
Black color (U, C) models
Silver color (U, C, A) models
HTR-5640 ..... Gold color (T, K) models
Black color (U, C) models
Silver color (U, C, A) models
HTR-5650RDS/HTR-5640RDS .. Black color (G) model
Silver color (B, G) models
DSP-AX540 ..... Gold color (J) model
DSP-AX440 ..... Gold color (J) model
Silver color (J) model
Accessories / 付属品
Remote Control, Batteries (Manganese Dry), Indoor FM Antenna, AM Loop Antenna, PAL 75/300 Socket [B model]

* Specifications are subject to change without notice due to product improvements.

※ 参考仕様および外観は予告なく変更されることがあります。

U ..... U.S.A. model
A ..... Australian model
G ..... European model
R ..... General model
K ..... Korean model
C ..... Canadian model
B ..... British model
L ..... Singapore model
T ..... Chinese model
J ..... Japanese model

Manufactured under license from Dolby Laboratories.
“Dolby”, “Pro Logic” and the double-D symbol are trademarks of Dolby Laboratories.

ドルビーラボラトリーズからの実施権に基づき製造されています。ドルビー、DOLBY、ドルビーデジタル、PRO LOGICおよびダブルD記号は、ドルビーラボラトリーズの商標です。

“DTS”, “DTS-ES Extended Surround” and “Neo: 6” are trademarks of Digital Theater Systems, Inc.

DTS、DTS-ES Extendedサラウンドおよび Neo:6はデジタルシアターシステムズの登録商標です。

AACロゴマークはドルビーラボラトリーズの商標です。

• Set Menu Table / セットメニュー

Category	Model		RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540		RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440	
	No.	MAIN MENU	SUB MENU	VALUE [INITIAL]	SUB MENU	VALUE [INITIAL]
BASIC	1	SETUP	ROOM： S >M L	S/[M]/L	ROOM： S >M L	S/[M]/L
			SUBWOOFER YES	[YES]/NONE	SUBWOOFER YES	[YES]/NONE
			SPEAKERS 6spk	2/3/4/5/[6]	SPEAKERS 6spk	2/3/4/5/[6]
			>SET CANCEL	[SET]/CANCEL	>SET CANCEL	[SET]/CANCEL
			Check：Test Tone		Check：Test Tone	
			Check OK? Yes	[Yes]/No	Check OK? Yes	[Yes]/No
	2	SP LEVEL	L -----¦¦------ R	[Center] ±10step	L -----¦¦------ R	[Center] ±10step
			C -----¦¦------	[Center] ±10step	C -----¦¦------	[Center] ±10step
			RL -----¦¦------	[Center] ±10step	RL -----¦¦------	[Center] ±10step
			RC -----¦¦------	[Center] ±10step	RC -----¦¦------	[Center] ±10step
			RR -----¦¦------	[Center] ±10step	RR -----¦¦------	[Center] ±10step
			SWFR ----------¦	[0dB] -40step	SWFR ----------¦	[0dB] -40step
SOUND	1	SPEAKER SET	1A CENTER SML	LRG/[SML]/NON	1A CENTER SML	LRG/[SML]/NON
			1B MAIN LARGE	[LARGE]/SMALL	1B MAIN LARGE	[LARGE]/SMALL
			1C REAR LR SML	LRG/[SML]/NON	1C REAR LR SML	LRG/[SML]/NON
			1D REAR CT SML	LRG/[SML]/NON	1D REAR CT SML	LRG/[SML]/NON
			1E BASS BOTH	MAIN/[BOTH]	1E BASS BOTH	MAIN/[BOTH]
	2	SP DISTANCE	UNIT	meters(m)/feet(ft)	UNIT	meters(m)/feet(ft)
			MAIN L/R 3.00m	0.3 to 24m [3.00m]/0.1m step	MAIN L/R 3.00m	0.3 to 24m [3.00m]/0.1m step
			CENTER 3.00m	0.3 to 24m [3.00m]/0.1m step (Effective distance difference 1.5m)	CENTER 3.00m	0.3 to 24m [3.00m]/0.1m step (Effective distance difference 1.5m)
			REAR LR 3.00m	0.3 to 24m [3.00m]/0.1m step	REAR LR 3.00m	0.3 to 24m [3.00m]/0.1m step
			REAR CT 2.10m	0.3 to 24m [2.10m]/0.1m step (Effective distance difference 9m)	REAR CT 2.10m	0.3 to 24m [2.10m]/0.1m step (Effective distance difference 9m)
			MAIN L/R 10.0	1 to 80feet [10.0feet]/0.5feet step	MAIN L/R 10.0	1 to 80feet [10.0feet]/0.5feet step
			CENTER 10.0	1 to 80feet [10.0feet]/0.5feet step (Effective distance difference 5feet)	CENTER 10.0	1 to 80feet [10.0feet]/0.5feet step (Effective distance difference 5feet)
			REAR LR 10.0	1 to 80feet [10.0feet]/0.5feet step	REAR LR 10.0	1 to 80feet [10.0feet]/0.5feet step
			REAR CT 7.00	1 to 80feet [7.0feet]/0.5feet step (Effective distance difference 30feet)	REAR CT 7.00	1 to 80feet [7.0feet]/0.5feet step (Effective distance difference 30feet)
	3	LFE LEVEL	SP LFE 0	-20dB to [0dB]/1dB step	SP LFE 0	-20dB to [0dB]/1dB step
			HP LFE 0	-20dB to [0dB]/1dB step	HP LFE 0	-20dB to [0dB]/1dB step
	4	D. RANGE	SP D.R > MAX	MIN/STD/[MAX]	SP D.R > MAX	MIN/STD/[MAX]
			HP D.R > MAX	MIN/STD/[MAX]	HP D.R > MAX	MIN/STD/[MAX]
	5	CENTER GEQ	100Hz -¦¦- 0	-6dB to +6dB [0dB]/1dB step	100Hz -¦¦- 0	-6dB to +6dB [0dB]/1dB step
			300Hz -¦¦- 0	-6dB to +6dB [0dB]/1dB step	300Hz -¦¦- 0	-6dB to +6dB [0dB]/1dB step
			1kHz -¦¦- 0	-6dB to +6dB [0dB]/1dB step	1kHz -¦¦- 0	-6dB to +6dB [0dB]/1dB step
			3kHz -¦¦- 0	-6dB to +6dB [0dB]/1dB step	3kHz -¦¦- 0	-6dB to +6dB [0dB]/1dB step
			10kHz -¦¦- 0	-6dB to +6dB [0dB]/1dB step	10kHz -¦¦- 0	-6dB to +6dB [0dB]/1dB step
	6	HP TONE CTRL	HP BASS 0	-6dB to +3dB [0dB]/1dB step	HP BASS 0	-6dB to +3dB [0dB]/1dB step
			HP TRBL 0	-6dB to +3dB [0dB]/1dB step	HP TRBL 0	-6dB to +3dB [0dB]/1dB step
INPUT	1	I/O ASSIGN	1A [A] CV INPUT 1	[DVD]	1A [A] CV INPUT 1	[DVD]
			1A [B] CV INPUT 2	[D-TV/CBL]	1A [B] CV INPUT 2	[D-TV/CBL]
			1B (1) OPTICAL OUT 1	[MD/CD-R]		
			1C (2) OPTICAL IN 1	[MD/CD-R]		
			1C (3) OPTICAL IN 2	[DVD]	1C (1) OPTICAL IN 1	[DVD]
			1C (4) OPTICAL IN 3	[D-TV/CBL]		
			1D (5) COAXIAL IN 1	[CD]	1D (2) COAXIAL IN 1	[CD]
	2	INPUT MODE	2 >AUTO LAST	[AUTO]/LAST	2 >AUTO LAST	[AUTO]/LAST
OPTION	1	DISPLAY SET	1 DIMMER 0	-4 to [0]/1 step	1 DIMMER 0	-4 to [0]/1 step
			1 V→S CONV	[ON]/OFF (except RT models)		
	2	MEMORY GUARD	2 M GUARD OFF	[OFF]/ON	2 M GUARD OFF	[OFF]/ON
	3	AUDIO MUTE	3 MUTE: MUTE	[MUTE]/-50dB/-20dB	3 MUTE: MUTE	[MUTE]/-50dB/-20dB
	4	ZONE SET	4 SP B: MAIN	[MAIN]/ZONE B	4 SP B: MAIN	[MAIN]/ZONE B
	5	DUAL MONO (J Only)		[MAIN]/SUB/ALL		[MAIN]/SUB/ALL

• The variable range of the parameter (Min/Max/Step) / パラメーターの可変範囲（最小/最大/ステップ）

		Unit
DSP LEVEL	-6/+3/1	dB
DELAY	1/99/1	ms

6ch Stereo Parameter		Unit
CT LEVEL	0/100/1	%
RL LEVEL	0/100/1	%
RR LEVEL	0/100/1	%
RC LEVEL	0/100/1	%

Pro Logic II Music Parameter		Unit
PANORAMA	OFF/ON	
DIMENSIONS	-3/+3/1	
CT WIDTH	0/7/1	

DTS Neo:6 Music Parameter		Unit
C. IMAGE	0/0.5/0.1	

■ INTERNAL VIEW

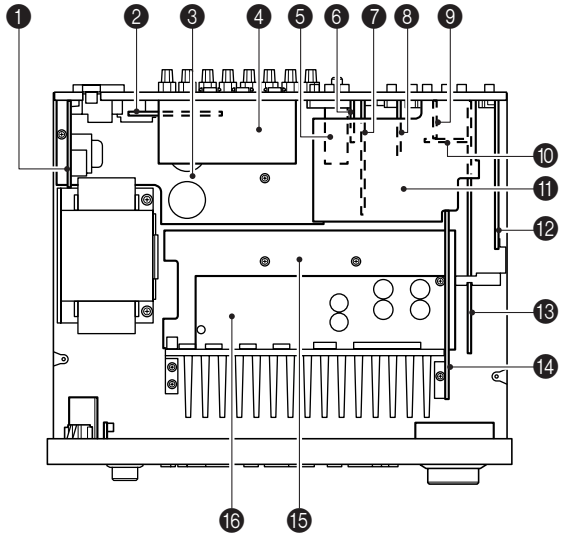

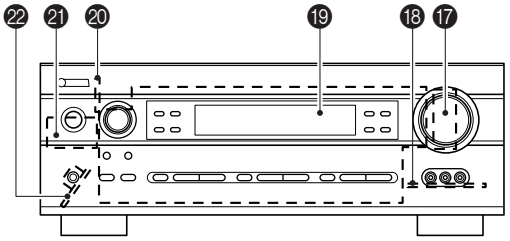

1. POWER (2) P.C.B.
2. POWER (3) P.C.B.
   (R, K models only)
3. MAIN (2) P.C.B.
4. VIDEO P.C.B.
   (J model only)
5. Tuner
6. FUNCTION (7) P.C.B.
   (U, C, A, B, G, L, R, T, K models only)
7. FUNCTION (5) P.C.B.
   (RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540 only)
8. FUNCTION (6) P.C.B.
9. FUNCTION (2) P.C.B.
10. FUNCTION (3) P.C.B.
11. FUNCTION (4) P.C.B.
12. DSP P.C.B.
13. FUNCTION (1) P.C.B.
14. POWER (1) P.C.B.
15. MAIN (1) P.C.B.
16. MAIN (3) P.C.B.
17. OPERATION (3) P.C.B.
18. OPERATION (4) P.C.B.
19. OPERATION (1) P.C.B.
20. OPERATION (6) P.C.B.
21. OPERATION (2) P.C.B.
22. OPERATION (5) P.C.B.

■ DISASSEMBLY PROCEDURES / 分解手順

(Remove parts in the order as numbered.)
Disconnect the power cable from the AC outlet.

1. Removal of Top Cover
a. Remove 4 screws (①) and 4 screws (②). (Fig. 1)
b. Slide the Top Cover rearward to remove it. (Fig. 1)

2. Removal of Front Panel Unit
a. Remove 5 screws (③) and then remove the Front Panel Unit. (Fig. 1)
b. Loosen the harness fixture fixing the cable.
c. Remove CB305, CB306, CB605 and CB612. (Fig. 1)

（番号順に部品を取り外してください。）
AC電源コンセントから、電源コードを抜いてください。

1. トップカバーの外し方
a. ①のネジ4本、②のネジ4本を外します。(Fig. 1)
b. トップカバーを後方へスライドさせ、取り外します。(Fig. 1)

2. フロントパネルユニットの外し方
a. ③のネジ5本を外し、フロントパネルユニットを取り外します。(Fig. 1)
b. ケーブルを固定している束線止めをゆるめます。
c. CB305、CB306、CB605、CB612を外します。(Fig. 1)

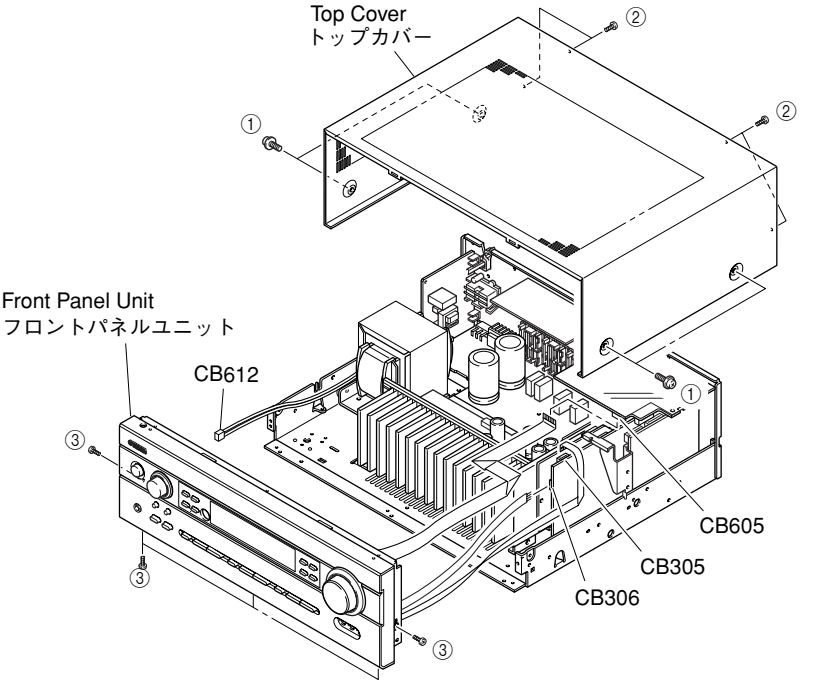

Fig. 1

3. Removal of DSP P.C.B.
a. Remove 1 screw (④). (Fig. 2)
b. Remove 6 screws (⑤). (Fig. 3)
c. Remove CB602 and CB603. (Fig. 2)
d. Remove the DSP P.C.B. with the Support/DSP. (Fig. 2)

3. DSP P.C.B.の外し方
a. ④のネジ1本を外します。(Fig. 2)
b. ⑤のネジ6本を外します。(Fig. 3)
c. CB602、CB603を外します。(Fig. 2)
d. DSP P.C.B.をサポート/DSPと共に取り外します。(Fig. 2)

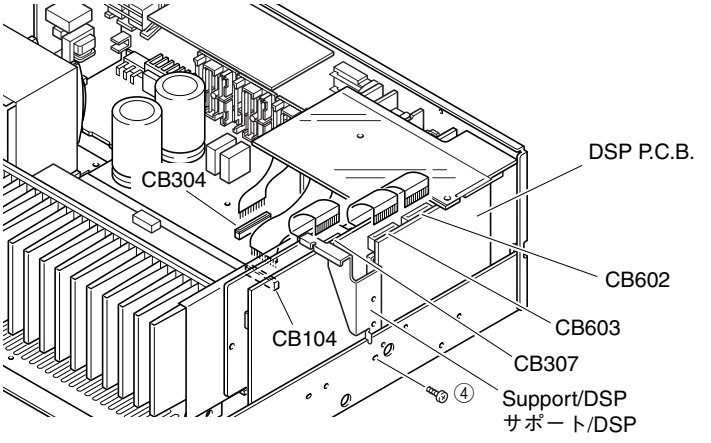

Fig. 2

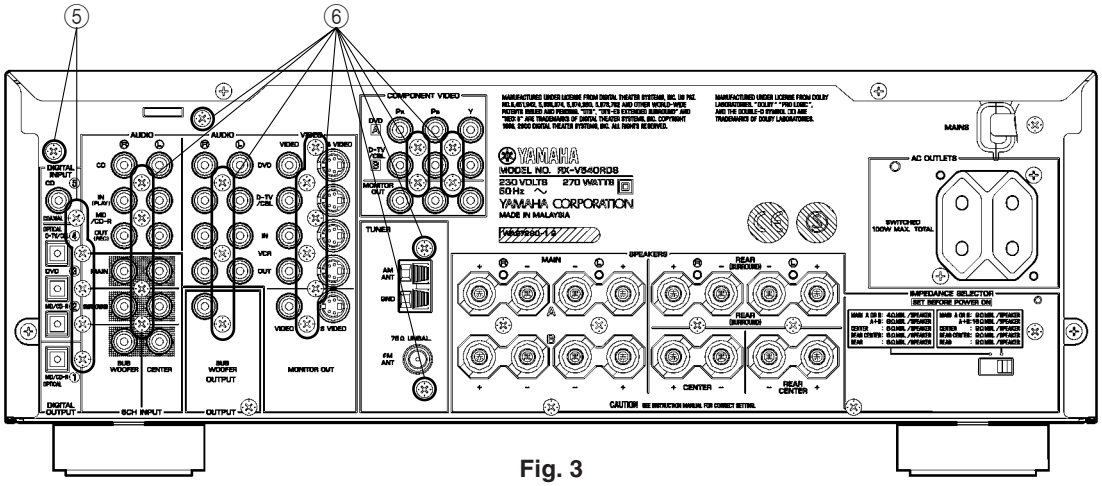

Fig. 3

4. Removal of FUNCTION (1) ~ (7) P.C.B.s and Tuner

a. Remove CB104, CB304 and CB307. (Fig. 2)
b. Remove 20 screws (⑥). (Fig. 3)
c. Remove FUNCTION (1) ~ (7) P.C.B.s. and the Tuner. (Fig. 4)

When checking the P.C.B.:

- Reconnect all cables (connectors) that have been disconnected.
  Be sure to use the extension cable for servicing for the following 2 sections.
  POWER (1) P.C.B. CB601 – FUNCTION (1) P.C.B. CB307: MF117200 (17P 200mm)
  DSP P.C.B. CB602 – FUNCTION (4) P.C.B. CB606: MF117200 (17P 200mm)
- When connecting the flat cable, use care for the polarity.
- The P.C.B. removed from the rear panel does not work because its grounding is loose. Be sure to connect the ground of each P.C.B. to the chassis or GND with a jumper wire or the like.

4. FUNCTION（1）～（6）、TUNERの外し方

a. CB104、CB304、CB307を外します。（Fig. 2）
b. ⑥のネジ20本を外します。（Fig. 3）
c. FUNCTION（1）～（6）、TUNERを取り外します。（Fig. 4）

P.C.B.チェックをする場合には

- 外したケーブル（コネクター）をすべて接続してください。
  ただし次の2区間は、サービス用延長ケーブルを使用してください。
  POWER (1) P.C.B. CB601 – FUNCTION (1) P.C.B. CB307: MF117200 (17P 200mm)
  DSP P.C.B. CB602 – FUNCTION (4) P.C.B. CB606: MF117200 (17P 200mm)
- フラットケーブルを接続する際、極性に注意してください。
- リアパネルから外したP.C.B.はアースが浮いて動作しませんので、各P.C.B.のアースをリード線等でシャーシまたはGNDに接続してください。

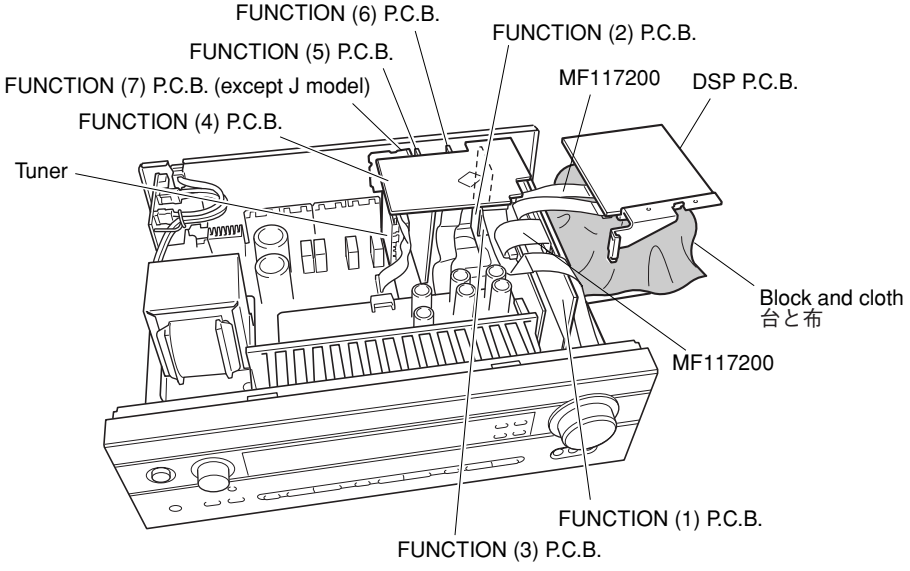

Fig. 4

5. Removal of MAIN (1), MAIN (3) and POWER (1) P.C.B.s

a. Remove CB307. (Fig. 5)
b. Remove 2 screws (⑦) and 3 screws (⑧). (Fig. 5)
c. Remove MAIN (1), (3) and POWER (1) P.C.B.s.. (Fig. 5)

5. MAIN（1）、MAIN（3）、POWER（1）P.C.B.の外し方

a. CB307を外します。（Fig. 5）
b. ⑦のネジ2本、⑧のネジ3本を外します。（Fig. 5）
c. MAIN（1）、MAIN（3）、POWER（1）P.C.B.を取り外します。（Fig. 5）

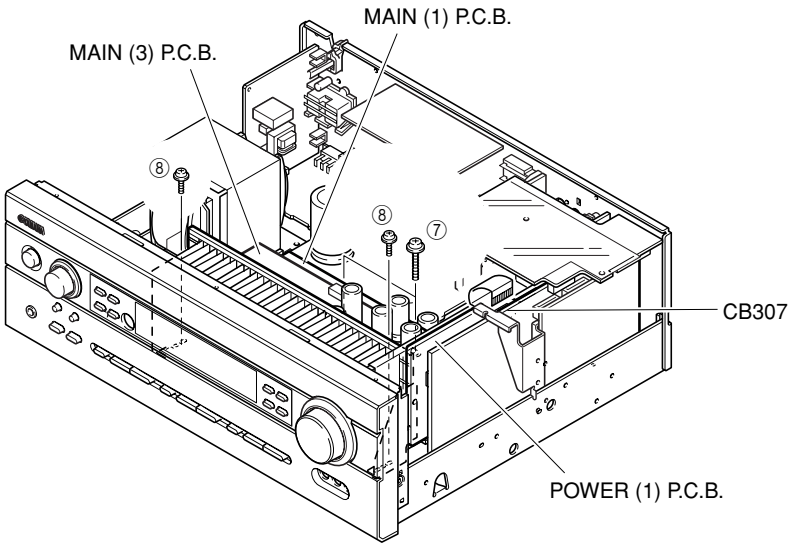

Fig. 5

When checking the P.C.B.:

- Reconnect all cables (connectors) that have been disconnected.
  Be sure to use the extension cable for servicing for the following section.
  POWER (1) P.C.B. CB601 – FUNCTION (1) P.C.B. CB307: MF117350 (17P 350mm)
- When connecting the flat cable, use care for the polarity.
- The P.C.B. removed from the rear panel does not work because its grounding is loose. Be sure to connect the ground of each P.C.B. to the chassis or GND with a jumper wire or the like.

P.C.B.チェックをする場合には

- 外したケーブル(コネクター)をすべて接続してください。
  ただし次の区間は、サービス用延長ケーブルを使用してください。
  POWER (1) P.C.B. CB601 – FUNCTION (1) P.C.B. CB307: MF117350 (17P 350mm)
- フラットケーブルを接続する際、極性に注意してください。
- リアパネルから外したP.C.B.はアースが浮いて動作しませんので、各P.C.B.のアースをリード線等でシャーシまたはGNDに接続してください。

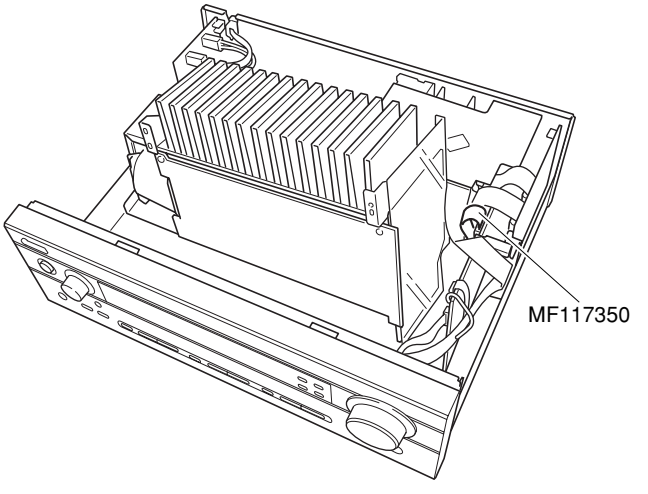

Fig. 6

■ SELF DIAGNOSIS FUNCTION (DIAG)／自己診断機能（ダイアグ）

There are 15 DIAG menu items, each of which has sub-menu items.
Listed in the table below are menu items and sub-menu items.
Note that not all menu items listed will apply to the models covered in this service manual.

本機には、検査、測定、不良個所の発見を目的にした自己診断機能（ダイアグ）があります。
ダイアグメニューは15個あり、そのそれぞれにサブメニューがあります。（ダイアグのメニュー操作は本体で行います。） 下表はメニュー一覧です。

No	DIAG menu		sub-menu
1	DSP THROUGH	1.ANALOG BYPAS	1. ANALOG BYPASS
			2. YSS 0dB
			3. YSS Front 0dB
			4. YSS FULL BIT
			5. YSS FULL BIT F
2	RAM THROUGH	2.RAM 0dB	RAM 0dB
3	PRO LOGIC / NEO6	3.PRO LOGIC I	1. PRO LOGIC I
			2. PRO LOGIC II
			3. Neo:6
4	SPEAKERS SET	4.MAIN:SML 0dB	1. MAIN: SMALL 0dB
			2. CENTER: NONE
			3. LFE/BASS: MAIN
			4. Front Mix: 5ch
			5. Rear Center power
			6. Tone Control Flat
			7. Tone Control +10dB
			8. Tone Control -10dB
5	MARGIN CHECK	5.MAIN 12dB	1. MAIN 12 dB margin
			2. MAIN 15 dB margin
6	OTHER INPUT	6.EXTERNAL DEC	EXTERNAL DECODER
7	DISPLAY CHECK	7. VFD CHECK	1. VFD CHECK (Initial display / 初期表示)
			2. VFD DISP OFF (All segments OFF / 全セグメント消灯)
			3. VFD DISP ALL (All segments ON 100% / 全セグメント点灯100%)
			4. VFD DIMMER (All segments ON 50% / 全セグメント点灯50%)
			5. CHECKED PATTERN (ON in lattice / 格子状点灯)
8	MANUAL TEST	8. TEST ALL	1. TEST ALL
			2. TEST MAIN L
			3. TEST CENTER
			4. TEST MAIN R
			5. TEST REAR R
			6. TEST REAR CENTER
			7. TEST REAR L
			8. TEST LFE
9	FACTORY PRESET	9. PRESET INHI	1. PRESET INHIBITED (memory initialization inhibited / メモリーの初期化禁止)
			2. PRESET RESERVED (memory initialized / メモリーの初期化)
10	AD DATA CHECK /FAN TEST	DC:98% PS: 38%	1. DC/PS (protection)
			2. THM/Fan (Not applied to these models / このモデルには適用されません)
			3. REC-OUT (Not applied to these models / このモデルには適用されません)
			4. IMP SW/POWER LIMIT
			5. K0/K1 (panel key)
			6. FAN DRIVE TEST: HIGH (Not applied to these models / このモデルには適用されません)
			7. FAN DRIVE TEST: MID (Not applied to these models / このモデルには適用されません)
			8. FAN DRIVE TEST: LOW (Not applied to these models / このモデルには適用されません)

No	DIAG menu		sub-menu	
11	IF STATUS	ISI:440308C000	1. INSIDE STATUS 1	(5 Byte)
			2. INSIDE STATUS 2	(3 Byte)
			3. CHANNEL STATUS 1	(5 Byte)
			4. CHANNEL STATUS 2	(5 Byte)
			5. CHANNEL STATUS 3	(5 Byte)
			6. CHANNEL STATUS 4	(5 Byte)
			7. CHANNEL STATUS 5	(4 Byte)
			8. BSI (YSS) 1	(5 Byte)
			9. BSI (YSS) 2	(5 Byte)
			10. BSI (YSS) 3	(5 Byte)
			11. BSI (YSS) 4	(4 Byte)
			12. BSI (CS) 1	(5 Byte)
			13. BSI (CS) 2	(5 Byte)
			14. BSI (CS) 3	(5 Byte)
			15. BSI (CS) 4	(5 Byte)
			16. BSI (CS) 5	(1 Byte)
			17. YSS938-1	(5 Byte)
			18. YSS938-2	(5 Byte)
			19. YSS938-3	(4 Byte)
			20. SECOND DECODER	(3 Byte)
			21. Mute Trigger	(5 Byte)
12	DSP RAM CHECK	YSS BUS:NoEr	1. YSS938 BUS CHECK	
			2. PLD/SRAM BUS CHECK	
13	SD DL CODE	RDV:XXXXXXXX	1. ROM DATA Version	
			2. TOC Area 0	
			3. TOC Area 1	
			4. TOC Area 2	
			5. TOC Area 3	
			6. TOC Area 4	
			7. TOC Area 5	
			8. Sum check Area 0	
			9. Sum check Area 1	
			10. Sum check Area 2	
			11. Sum check Area 3	
			12. Sum check Area 4	
			13. Sum check Area 5	
14	SOFT SWITCH	14.SW :PCB	1. SW MODE	
			2. MODEL SETTING	
			3. TUNER DESTINATION	
			4. RDS EXIST	
			5. ZONE 2 EXIST	
			6. VIDEO FORMAT	
15	ROM VERSION/CHECK SUM/ PORT	VER. XXXXX	1. VERSION	
			2. CHECK SUM ALL/PROGRAM	
			3. PORT	
			4. AAC PORT	

• Starting DIAG

Press the “STANDBY/ON” key while simultaneously pressing those two keys of the main unit as indicated in the figure below.

● ダイアグの起動

本体の下図に示すキーを同時に押しながら“STANDBY/ON”キーを押すと、ダイアグが起動します。

Keys of main unit / 本体キー



Turn on the power while pressing these keys.
これらのキーを同時に押しながら、パワーオンする。

• Starting DIAG in the protection cancel mode

If the protection function works and causes hindrance to trouble diagnosis, cancel the protection function as described below, and it will be possible to enter the DIAG mode. (The protection functions other than the excess current detect function will be disabled.)

Press the “STANDBY/ON” key while simultaneously pressing those two keys indicated in the figure above. At this time, keep pressing those two keys for 3 seconds or longer.

In this mode, the “SLEEP” segment of the FL display of the main unit flashes to indicate that the mode is DIAG mode with the protection functions disabled.

CAUTION!
Using this product with the protection function disabled may cause damage to itself. Use special care for this point when using this mode.

● プロテクション解除モードでの起動

プロテクションが動作することにより、故障箇所の診断に支障をきたすような場合は、次の方法によりプロテクションを解除した状態でダイアグモードに入ることができます。（過電流検出以外のプロテクション動作を解除する）

上図のキーを同時に押しながら“STANDBY/ON”キーを押します。このとき、上図のキーを3秒以上押し続けてください。
このモードでは本体FLの“SLEEP”セグメントが点滅し、プロテクションを解除した状態でのダイアグモードであることを知らせます。

注意！
プロテクションを解除した状態でのダイアグモードは、危険な状態でもプロテクションが作動しないため、動作させると、機器を破壊することがあります。このモードを使用する場合は十分注意してください。

• Canceling DIAG

[1] Before canceling DIAG, execute setting for PRESET of DIAG menu No.9 (Memory initialization inhibited or Memory initialized).
* In order to keep the user memory stored, be sure to select PRESET INHIBITED (Memory initialization inhibited).
[2] Turn off the power by pressing the “STANDBY/ON” key of the main unit.

● ダイアグの解除

① ダイアグを解除する前に、ダイアグメニューNo.9のFACTORY PRESET（メモリーの初期化禁止/またはメモリーの初期化）の設定をします。
※ ユーザーメモリーを保持したい場合は、必PRESET INHIBITED（メモリー初期化禁止）を選択してください。
② 本体の“STANDBY/ON”キーを押し、パワーオフにします。

• Display provided when DIAG started

The FL display of the main unit displays the protection function history data and the version (1 alphabet) and the DIAG menu [sub-menu (ANALOG BYPASS) of DIAG menu No.1 DSP THROUGH] a few seconds later.

● ダイアグ起動時の表示

本体のFLディスプレイにプロテクション履歴情報とバージョン(英1文字)が表示され、数秒後にダイアグメニュー(No.1 DSP THROUGHのサブメニューANALOG BYPASS)になります。

When there is no history of protection function:

プロテクション履歴がない場合:

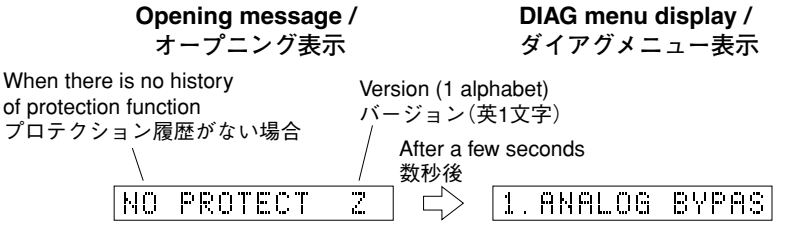

When there is a history of protection function:

プロテクション履歴がある場合:

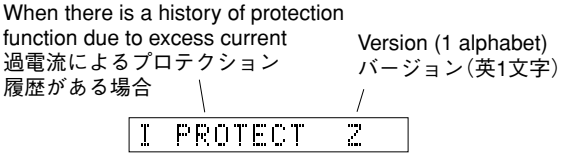

Cause: An excessive current flowed through the power amplifier.
Supplementary information: As current of the power transistor is detected, the abnormal channel can be identified by checking the current detect transistor.

Turning on the power without correcting the abnormality will cause the protection function to work immediately and the power supply will instantly be shut off.

原因：パワーアンプに過電流が流れた。
補足：パワートランジスタの電流を検出していますので、電流検出トランジスタをチェックすれば異常チャンネルが特定できます。
異常状態のままパワーオンすると、瞬時にプロテクションがかかり、すぐに電源が切れます。

Note)
- Applying the power to a unit without correcting the abnormality can be dangerous and cause additional circuit damage.
- The output transistors in each amplifier channel should be checked for damage before applying any power.
- Amplifier current should be monitored by measuring across the emitter resistors for each channel.

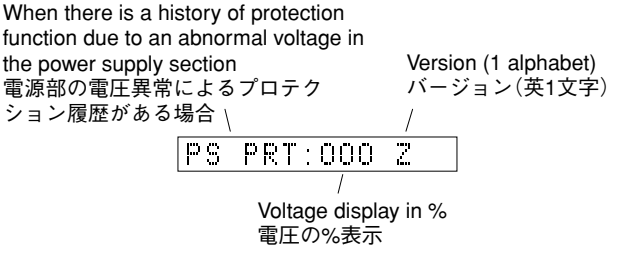

Cause: The voltage in the power supply section is abnormal.
Supplementary information: The abnormal voltage is displayed in % based on 5V as 100%.

Turning on the power without correcting the abnormality will cause the protection function to work 1 second later and the power supply will be shut off.

原因：電源部の電圧が異常。
補足：異常時の電圧の状態を、5Vを100%とした値で%表示します。
異常状態のままパワーオンすると、1秒後にプロテクションがかかり、電源が切れます。

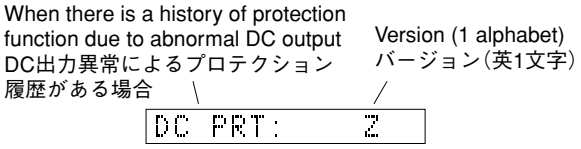

Cause: DC output of the power amplifier is abnormal.

Turning on the power without correcting the abnormality will cause the protection function to work 3 seconds later and the power supply will be shut off.

原因：パワーアンプのDC出力が異常。
異常状態のままパワーオンすると、3秒後にプロテクションがかかり、電源が切れます。

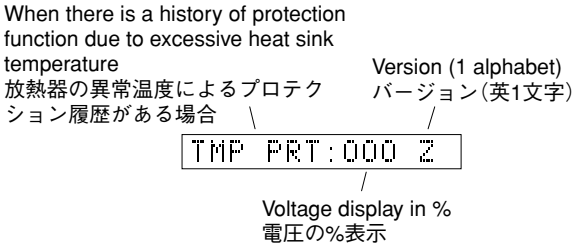

Cause: The temperature of the heat sink is excessive.
Supplementary information: The abnormal voltage is displayed in % based on 5V as 500%.

Turning on the power without correcting the abnormality will cause the protection function to work 1 second later and the power supply will be shut off.

原因：放熱器の温度が異常。
補足：異常時の電圧の状態を、5Vを500%とした値で%表示します。
異常状態のままパワーオンすると、1秒後にプロテクションがかかり、電源が切れます。

* Additional causes of protection can be due to loose connections, associated components, CPU, etc.
* For the protection voltage value, refer to DIAG menu No.10 described later.

※ 前記の異常原因の他に、コネクターのはずれやCPU周辺などに原因がある場合があります。
※ プロテクションの電圧値に関しては、後述のダイアグメニューNo.10を参照してください。

• History of protection function
When the protection function has worked, its history is stored in memory with a backup. Even if no abnormality is noted while servicing the unit, an abnormality which has occurred previously can be defined as long as the backup data has been stored.
The history of the protection function is cleared when DIAG is cancelled by selecting PRESET RESERVED (Memory initialized) of DIAG menu No.9 or when the backup data is erased.

● プロテクションの履歴
プロテクションが働いた場合、履歴をバックアップして記憶しています。サービスのときに異常が認められなくても、バックアップが残っていれば、お客様のところで起きた異常を区別できます。
プロテクションの履歴は、ダイアグメニューNo.9でPRESET RESERVED(メモリーの初期化)を選んでダイアグを解除した場合や、バックアップが消えたときにはクリアされます。

• Display during menu operation

During the DIAG operation, the function at work is indicated on the FL indicator. The contents displayed during the function operation are described in the later section on details of functions.

● メニュー動作中の表示

ダイアグ中、本体のFLディスプレイに動作中の機能が表示されます。機能動作中の表示内容については、後述の機能詳細で記述します。

• Operation procedure of DIAG menu and SUB-MENU

There are 15 MENU items, each of which has some SUB-MENU items.

DIAG menu selection

Main unit: Select the menu using ▷ (Forward) and ◁ (Reverse) keys of PRESET/TUNING.

SUB-MENU selection

Main unit: Select the sub-menu using ▷ (Forward) and ◁ (Reverse) keys of PROGRAM.

● ダイアグメニューとサブメニューの操作

ダイアグにはNo.1～15のメニューがあり、そのそれぞれにサブメニューがあります。

ダイアグメニューの選択

本体キーでの操作： PRESET/TUNING ▷（順送り）, ◁（逆送り）キーで選択します。

サブメニューの選択

本体キーでの操作： PROGRAM ▷（順送り）, ◁（逆送り）キーで選択します。

Keys of main unit / 本体キー

• Functions in DIAG mode

In addition to the DIAG menu items, functions as listed below are available.

- Input selection, 6CH input
- Center/Rear/Rear Center/Sub-woofer level adjustment
- Muting
- Power on/off
- Master volume

* Functions related to the tuner and the set menu are not available.

* It is possible to confirm Menu No.11 IF STATUS while keeping the signal process (operation status) of each DIAG menu by using the input mode key of the main unit.

● ダイアグ中の機能

ダイアグメニューの他に、以下の機能が動作します。

- インプット切り換え、6CHインプット
- センター、リア、リアセンター、サブウーファーレベル調整
- ミューティング
- パワーオン/オフ
- マスターボリューム

※ チューナー関連、セットメニュー関連は機能しません。

※ 本体のINPUT MODEキーにより、各ダイアグメニューの信号処理（動作状態）を維持したままメニューNo.11 “IF STATUS”の確認ができます。

• Initial settings used to start DIAG

The following initial settings are used when starting DIAG. When DIAG is canceled, these settings are restored to those before starting DIAG.

- Master volume: -40dB
- Input: DVD (6CH INPUT OFF)
- Effect level: 0dB
- Audio mute: OFF
- Speaker setting: LARGE / BASS OUT = BOTH
- DIAG menu: DSP THROUGH (1. ANALOG BYPASS)

● ダイアグ開始時の初期設定

ダイアグ開始時に以下のような設定になります。ダイアグ解除時にはダイアグ開始前の状態に戻ります。

- マスターボリューム：-40dB
- インプット：DVD（6CH INPUT オフ）
- エフェクトレベル：0dB
- オーディオミュート：オフ
- スピーカー設定：LARGE / BASS OUT = BOTH
- ダイアグメニュー：DSP THROUGH (1. ANALOG BYPASS)

• Details of DIAG menu

With full-bit output specified in some modes, it is possible to execute 0dBFS output without head margin in each channel.

1. DSP THROUGH

Main DSP of YSS938 is selected for MAIN L/R output.

ANALOG BYPASS

- The signal for L/R is output as it is without passing through the DSP section.

● ダイアグメニュー詳細

一部のモードでフルビット指定することで、各チャンネルのヘッドマージンを廃して0dBFS出力することが可能です。

1. DSP THROUGH

MAIN L/R出力にはYSS938のMain DSPが選択されます。

ANALOG BYPASS

・ L/Rは、DSP部を通らずにそのまま出力されます。

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Both ch, -20 dBm	-10 dB	+24.1 dBm	- ∞	- ∞	- ∞	- ∞

YSS 0dB

- The signal is output including the head margin.
  Head margin:
  Main L/R: 0dBFS, Center: -6dBFS,
  Rear Center: -6dBFS, RL/RR: -12dBFS,
  SWFR: Add L/R signal at -20dBFS.

YSS 0dB

・ ヘッドマージンを含んで出力されます。
ヘッドマージン：
Main L/R: 0dBFS、Center: -6dBFS、
Rear Center: -6dBFS、RL/RR: -12dBFS、
SWFR: L/Rを-20dBfsにて加算

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Both ch, -20 dBm	-10 dB	+23.3 dBm	+14.0 dBm	+14.0 dBm	+13.9 dBm	+0.3 dBm

YSS Front 0dB

- The front CH signal including the head margin is output at the main CH.
  Head margin:
  Main L/R: 0dBFS, Center: -6dBFS,
  RL/RR: -12dBFS, SWFR: Add L/R signal at -20dBFS.

YSS Front 0dB

・ ヘッドマージンを含んで、フロントCHがメインCHに出力されます。
ヘッドマージン：
Main L/R: 0dBFS、Center: -6dBFS、
Rear Center: -6dBFS、RL/RR: -12dBFS、
SWFR: L/Rを-20dBfsにて加算

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Both ch, -20 dBm	-10 dB	+29.3 dBm	- ∞	- ∞	- ∞	- ∞

YSS FULL BIT

- The signal is output in digital full bit without including the head margin. The SWFR signal is output but not in digital full bit.

YSS FULL BIT

・ヘッドマージンを含まず、デジタルフルビットで出力されます。SWFRは出力されますが、デジタルフルビットではありません。

1.YSS FULL BIT

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Both ch, -20 dBm	-10 dB	+23.3 dBm	+14.2 dBm	+14.2 dBm	+14.0 dBm	+0.3 dBm

YSS FULL BIT F

- The front CH signal is output in digital full bit at the main CH.

YSS FULL BIT F

・フロントCHがメインCHに、デジタルフルビットで出力されます

1.FULL BIT F

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Both ch, -20 dBm	-10 dB	+23.3 dBm	- ∞	- ∞	- ∞	- ∞

DSP THROUGH ~
YSS (Analog)

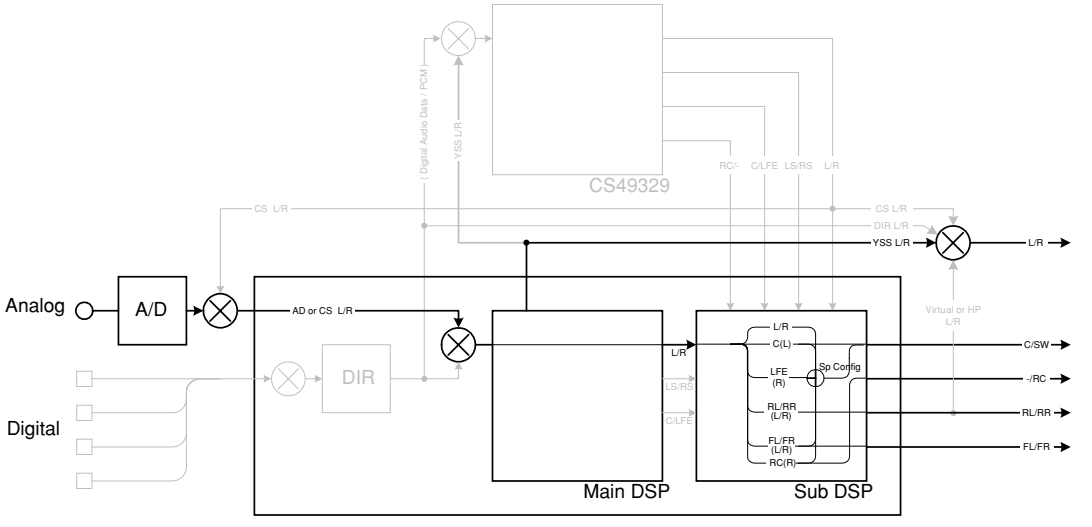

(Shaded items not used in this example)

2. RAM THROUGH

This function is for YSS938 only.
Only the CT signal is output through the Sub DSP – DRAM.

RAM 0dB

2. RAM THROUGH

YSS938のみの動作です。
CTのみがSub DSP ― DRAM経由で出力されます。

RAM 0dB

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Both ch, -20 dBm	-10 dB	- ∞	+8.2 dBm	- ∞	- ∞	- ∞

RAM THROUGH ~
(Auto)

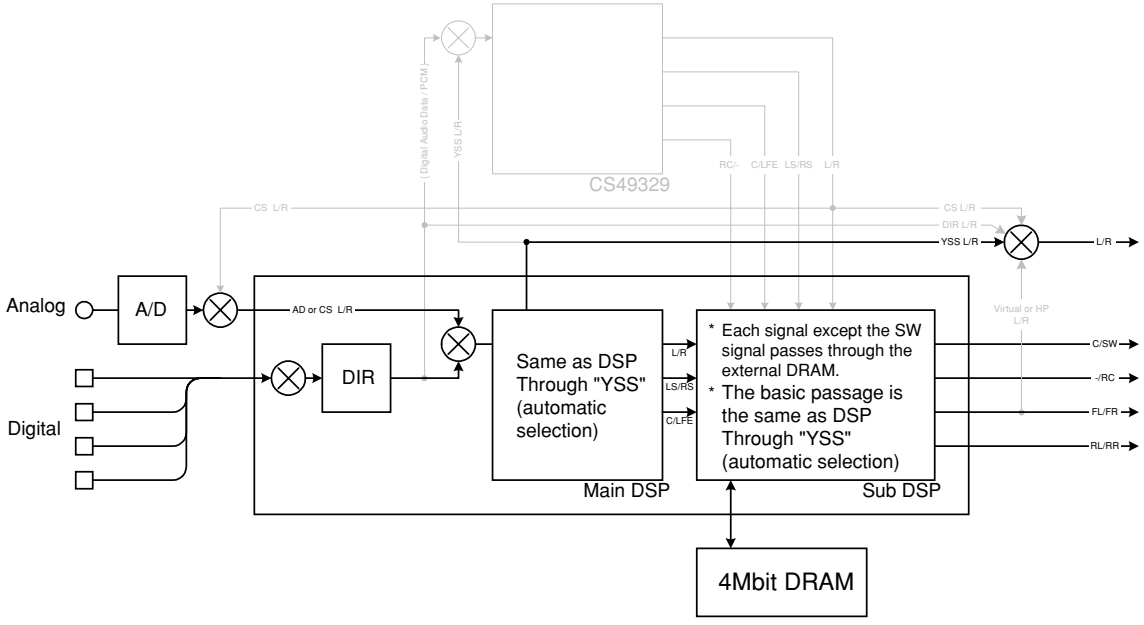

(Shaded items not used in this example)

3. PRO LOGIC

PRO LOGIC I

3. PRO LOGIC

PRO LOGIC I

3.PRO LOGIC I

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Each ch, -20 dBm	-10 dB	+23.5 dBm	- ∞	- ∞	- ∞	-9.5 dBm
Both ch, -20 dBm	-10 dB	- ∞	+17.1 dBm	- ∞	- ∞	- ∞

PRO LOGIC II

PRO LOGIC II

3.PRO LOGIC II

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Each ch, -20 dBm	-10 dB	+23.5 dBm	- ∞	- ∞	- ∞	-9.5 dBm
Both ch, -20 dBm	-10 dB	- ∞	+17.1 dBm	- ∞	- ∞	- ∞

The L/C/R/RL/RR signals undergo the Pro-Logic processing and C/RL/RR signals are output through Sub DSP-DRAM. Main DSP is selected for MAIN L/R output.
Using the sub-menu, it is possible to select PRO LOGIC I, II (Movie). The Auto Input Balance function is always off.
When the Dolby Digital Multi input is used, the function is the same as in the Dolby Digital Normal mode.
The LFE signal is not output when decoding in the PRO LOGIC I, II mode.

L/C/R/RL/RRはYSS938によりプロロジック処理され、C/RL/RRはSub DSP-DRAM経由で出力されます。MAIN L/R出力にはMain DSPが選択されます。
サブメニューでPRO LOGIC I、II(Movie)を選択可能です。常時Auto Input Balance offです。

AAC入力時はCS49329でデコード後、L/Rはプロロジック処理されます。(J modelのみ)

Dolby Digital Multi入力時は、通常のDolby Digital Normalと同じ動作をします。
PRO LOGIC I、IIデコード時は、LFEは出力されません。

Dolby Pro Logic (Auto)

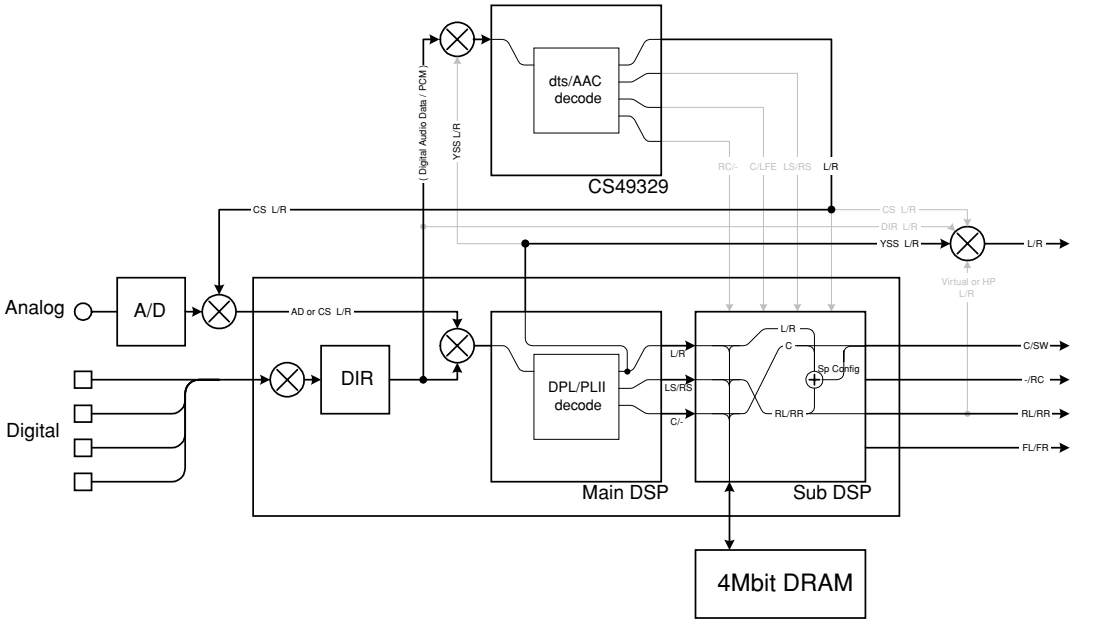

(Shaded items not used in this example)

Neo:6 Neo:6

3. Neo:6

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Each ch, -20 dBm	-10 dB	+23.5 dBm	- ∞	- ∞	- ∞	-9.5 dBm
Both ch, -20 dBm	-10 dB	- ∞	+17.1 dBm	- ∞	- ∞	- ∞

L/C/R/RL/RC/RR signals are NEO:6 processed by CS49329 and C/RL/RC/RR signals are output through Sub DSP-DRAM. CS49329 is selected for the MAIN L/R output. The NEO:6 mode is fixed to Cinema 6ch.
When DD/dts input is used, the signal is decoded by YSS-938 and then L/R signal is NEO:6 processed by CS49329. When AAC input is used, the signal is muted. When NEO:6 decoding is used, the LFE signal is not output.

L/C/R/RL/RC/RRはCS49329によりNEO:6処理され、C/RL/RC/RRはSub DSP-DRAM経由で出力されます。MAIN L/R出力にはCS49329が選択されます。NEO:6のモードはCinema 6ch固定です。
DD/dts入力時はYSS-938でデコード後、L/RをCS49329でNEO:6処理。AAC入力時はミュートされます。
NEO:6デコード時は、LFEは出力されません。

Neo:6 (Auto)

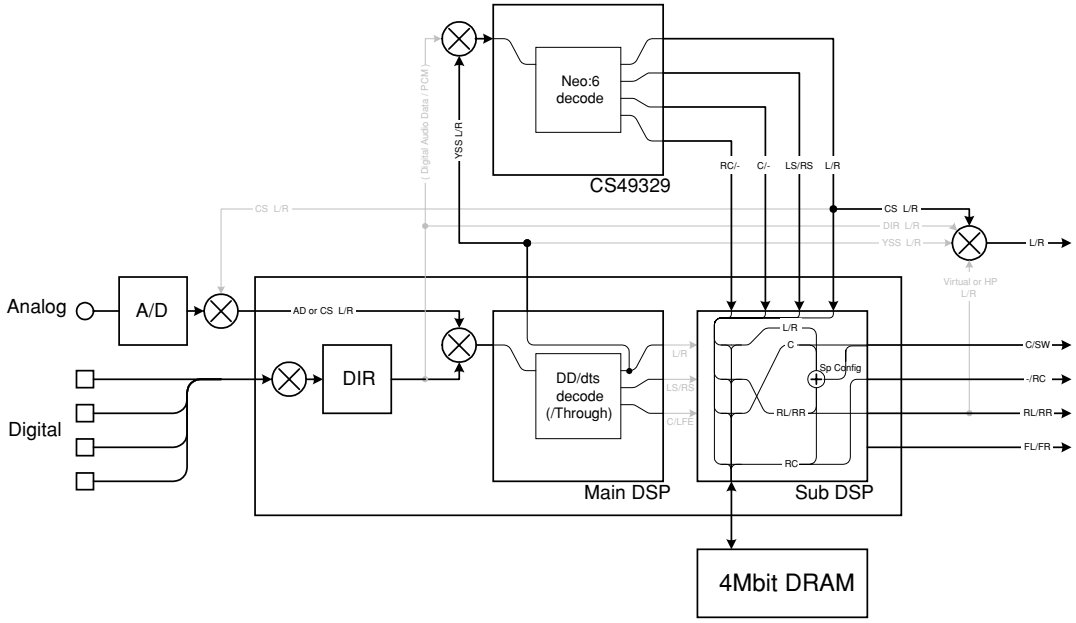

(Shaded items not used in this example)

4. SPEAKERS SET

The input signal is automatically identified and switched in the priority order of dts → DOLBY DIGITAL → AAC → PCM AUDIO → Analog (A/D) according to the signal detection.
The signals output from the DSP block are the same as 1. DSP THROUGH: YSS 0dB.

4. SPEAKERS SET

入力は信号検出によって、dts → DOLBY DIGITAL → AAC → PCM AUDIO → アナログ(A/D)の優先順で自動判別切り換えされます。
DSP部からは、No.1 DSP THROUGHのYSS 0dBと同様の信号が出力されます。

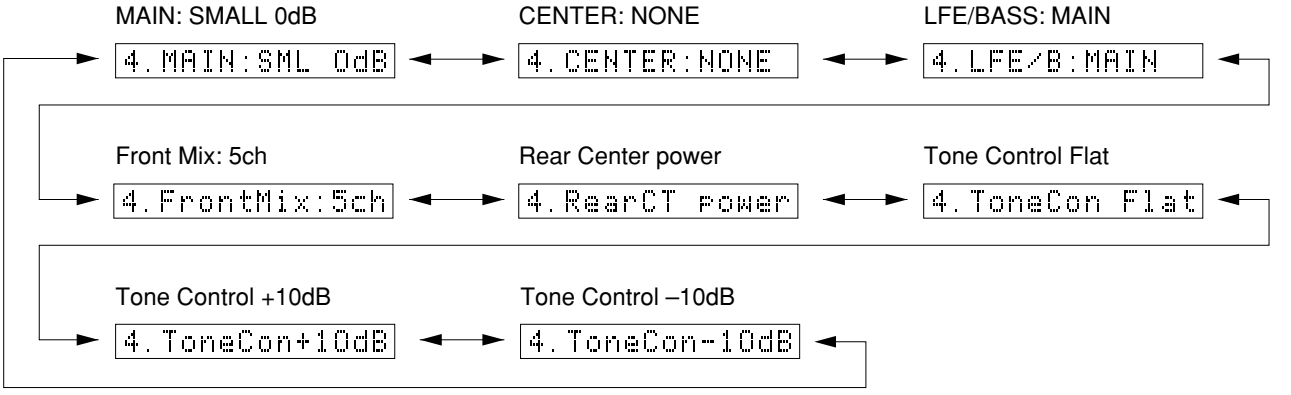

The analog switch settings for each sub-menu are as shown in the table below.

各サブメニューにおけるアナログスイッチの設定は以下の通りです。

	Sub-menu	CENTER SP	REAR SP	MAIN SP	MAIN LEVEL	LFE/BASS
1	MAIN: SMALL 0dB	LARGE	LARGE	SMALL	0dB	SWFR
2	CENTER: NONE	NONE	LARGE	LARGE	0dB	BOTH
3	LFE/BASS: MAIN	SMALL	SMALL	LARGE	0dB	MAIN
4	FRONT MIX: 5CH	LARGE	LARGE	LARGE	0dB	BOTH
5	REAR CENTER: POWER	LARGE	LARGE	LARGE	0dB	BOTH

LARGE: This mode is used with a speaker with high bass reproduction performance (a large unit). Full bandwidth signals are output.
SMALL: This mode is used with a speaker with low bass reproduction performance (a small unit). The signals of 90Hz or less are mixed into the channel specified by LFE/BASS.
NONE: This mode is used with no center speaker. The center content is reduced by 3dB and distributed to MAIN L/R.

LARGE： 低音再生能力の高い(ユニットの大きい)スピーカーを使用するモードです。全帯域が出力されます。
SMALL： 低音再生能力の低い(ユニットの小さい)スピーカーを使用するモードです。90Hz以下がLFE/BASSで指定したチャンネルにミックスされます。
NONE： スピーカーを使用しないモードです。センター成分は-3dBされて、MAIN L/R に振り分けられます。

	Sub-menu	Treble	Bass
6	Tone Control Flat	0 dB	0 dB
7	Tone Control +10dB	+10 dB	+10 dB
8	Tone Control –10dB	–10 dB	–10 dB

Reference data
INPUT: DVD ANALOG (Both ch)

Sub-menu		Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER
				MAIN L/R	CENTER	REAR CENTER	RL/RR	OUTPUT (50Hz)
1	MAIN: SMALL 0dB	1kHz Both ch, -20 dBm	-10 dB	+23.5 dBm	- ∞	- ∞	- ∞	- ∞
2	CENTER: NONE	1kHz Both ch, -20 dBm	-10 dB	+11.0 dBm	+14.0 dBm	- ∞	- ∞	- ∞
3	LFE/BASS: MAIN	50Hz Both ch, -20 dBm	-10 dB	+26.0 dBm	- ∞	- ∞	- ∞	+7.5 dBm
4	Front Mix: 5ch	1kHz Both ch, -20 dBm	-10 dB	+23.3 dBm	- ∞	- ∞	- ∞	- ∞
5	Rear Center Power	1kHz Both ch, -20 dBm	-10 dB	- ∞	- ∞	+14.0 dBm	- ∞	- ∞
6	Tone Control Flat	1kHz Both ch, -20 dBm	-10 dB	+23.5 dBm	+14.0 dBm	+14.0 dBm	+13.9 dBm	+0.3 dBm
7	Tone Control +10dB	1kHz Both ch, -20 dBm	-10 dB	+25.5 dBm	+14.0 dBm	+14.0 dBm	+13.9 dBm	+0.3 dBm
8	Tone Control -10dB	1kHz Both ch, -20 dBm	-10 dB	+21.1 dBm	+14.0 dBm	+14.0 dBm	+13.9 dBm	+0.3 dBm

5. MARGIN CHECK

The signal is output including the head margin.

MAIN 12dB MARGIN

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER
		MAIN L/R	CENTER	REAR CENTER	RL/RR	OUTPUT (50Hz)
Both ch, -20 dBm	-10 dB	+14.2 dBm	- ∞	- ∞	- ∞	- ∞

MAIN 18dB MARGIN

Reference data
INPUT: DVD ANALOG
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER
		MAIN L/R	CENTER	REAR CENTER	RL/RR	OUTPUT (50Hz)
Both ch, -20 dBm	-10 dB	+17.2 dBm	- ∞	- ∞	- ∞	- ∞

5. MARGIN CHECK

ヘッドマージンを含んで出力されます。

MAIN 12dB MARGIN



MAIN 18dB MARGIN



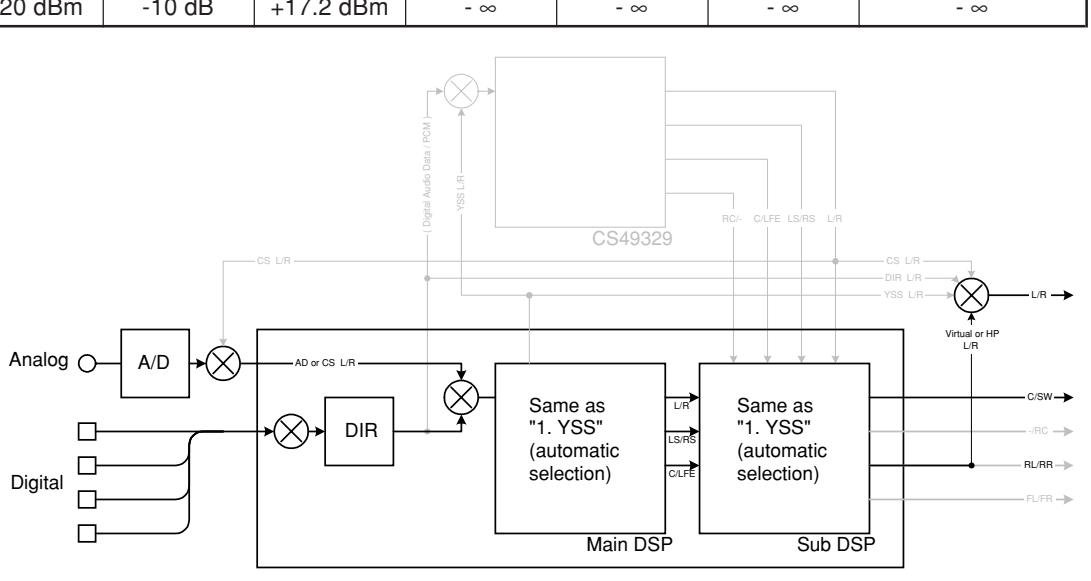

(Shaded items not used in this example)

6. OTHER INPUT

The signal input through the 6CH INPUT terminals is output.

EXTERNAL DECODER

6. OTHER INPUT

6CH入力した信号が出力されます。

EXTERNAL DECODER

Reference data
INPUT: 6CH INPUT
SWFR: 50Hz, Others: 1kHz

Input level	Volume	SPEAKER OUTPUT (1kHz)				SUBWOOFER OUTPUT (50Hz)
		MAIN L/R	CENTER	REAR CENTER	RL/RR	
Both ch, -20 dBm	-10 dB	+24.1 dBm	+15.2 dBm	- ∞	+15.0 dBm	-6.9 dBm

7. DISPLAY CHECK

This program is used to check the FL display section. The display condition varies as shown below according to the sub-menu operation. The signals are processed using EFFECT OFF (The L/R signal is output using ANALOG MAIN BYPASS.)
Regarding internal/external synchronization selection of the image signals by the microprocessor control, the internal synchronization is selected when the initial display is provided and when all FL's light up and the external synchronization at any other time.
Also, except when the initial display is provided, 128 characters for confirmation of the OSD driver are displayed as the image output.

7. DISPLAY CHECK

FL表示部のチェックプログラムです。サブメニュー操作により、表示状態が以下のように変わります。
信号処理はEFFECT OFF（ANALOG MAIN BYPASSでL/Rを出力）です。
マイコン制御による映像信号の内部/外部同期切替は、初期表示とFL 全点灯時に内部同期となり、それ以外は強制外部同期となります。
また、初期表示以外で映像出力にOSDドライバ確認用128文字表示が出ます。

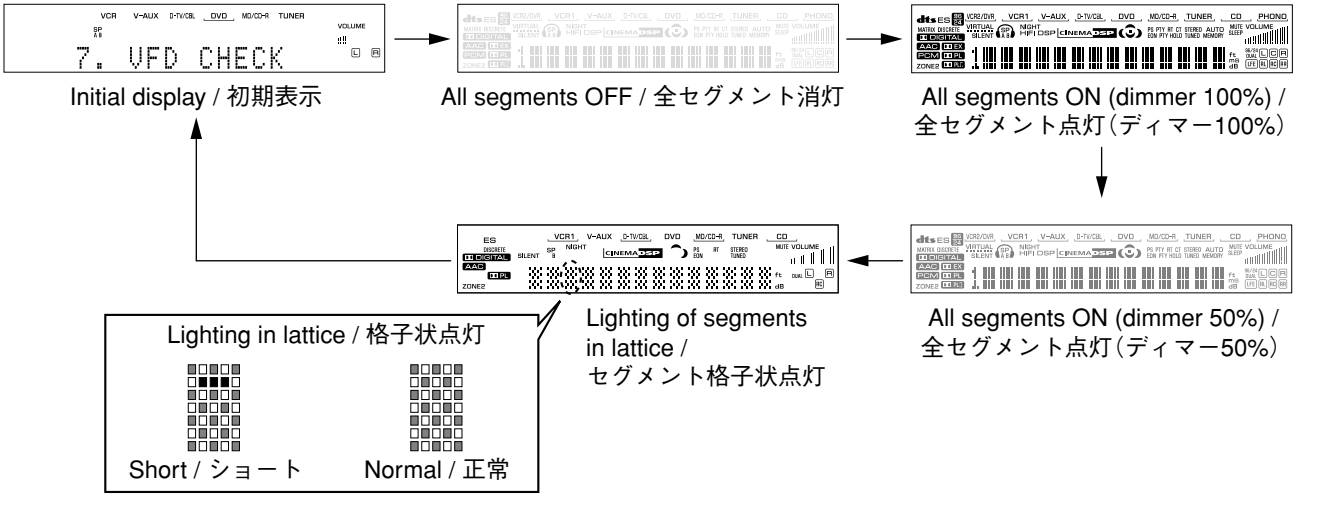

Segment conditions of the FL driver and the FL tube are checked by turning ON and OFF all segments. Next, the operation of the FL driver is checked by using the dimmer control. Then a short between segments next to each other is checked by turning ON and OFF all segments alternately (in lattice). (In the above example, the segments in the second row from the top are shorted.)

全セグメント消灯・全セグメント点灯によりFLドライバー、FL管のセグメントの不良を確認します。
次に、ディマーコントロールによってFLドライバーの動作チェックを行います。
さらに全セグメントを交互（格子状）に点灯/消灯することで、隣り合うセグメントのショートをチェックします。

8. MANUAL TEST

The noise generator built into the DSP outputs the test noise through the channels specified by the sub-menu.
The noise frequency for LFE is 35 to 250 Hz. Other than that, the center frequency is 800Hz.

8. MANUAL TEST

DSP内蔵のノイズ発生回路によって、サブメニューで指定したチャンネルへテストノイズを出力します。
LFE用のノイズ周波数は35～250Hz、それ以外は中心周波数800Hzとなります。

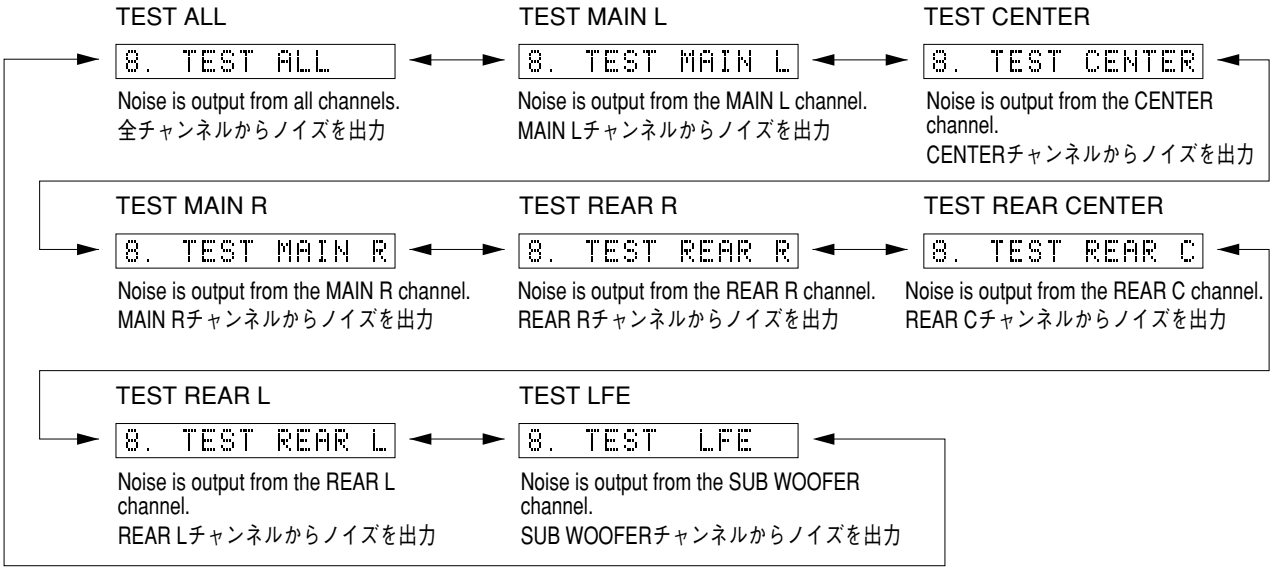

9. FACTORY PRESET

This menu is used to reserve and inhibit initialization of the back-up RAM. The signals are processed using EFFECT OFF. (The L/R signal is output using ANALOG MAIN BYPASS.)

9. FACTORY PRESET

バックアップ用RAM（音場プログラムのパラメーターやセットメニュー内容等）の初期化を予約/禁止します。
信号処理はEFFECT OFFと同じです（ANALOG MAIN BYPASSで、L/Rを出力）。



PRESET INHIBIT (Initialization inhibited) / **PRESET INHIBIT**（初期化禁止）
RAM initialization is not executed. Select this sub-menu to protect the values set by the user.
RAMの初期化は行われません。ユーザーの設定値を保護するときは、こちらを選択してください。

PRESET RESERVED (Initialization reserved) / **PRESET RESERVED**（初期化予約）
Initialization of the back-up RAM is reserved. (Actually, initialization is executed the next time that the power is turned on.) Select this sub-menu to reset to the original factory settings or to reset the RAM.
バックアップRAMの初期化が予約されます。（実際に初期化されるのは、次回の電源投入時です。）工場出荷時やRAMをリセットしたいときは、こちらを選択してください。

CAUTION: Before setting to the PRESET RESERVED, write down the existing preset memory content of the Tuner in a table as shown below. (This is because setting to the PRESET RESERVED will cause the user memory content to be erased.)

注意：PRESET RESERVEDを選んで初期化をする前に、チューナーのユーザーメモリー内容を下表に書き写してください。（初期化をすると、ユーザーメモリーの内容は消えてしまいます。）

Preset group	P1	P2	P3	P4	P5	P6	P7	P8
A								
B								
C								
D								
E								

• **PRESET STATIONS / プリセット局**

STATION		FM FACTORY PRESET DATA (MHz)		
PAGE	NO.	U, C	R, T, K, A, B, G, L	J
A/C/E	1	87.5	87.5	76.0
	2	90.1	90.1	83.0
	3	95.1	95.1	84.0
	4	98.1	98.1	86.0
	5	107.9	108.0	90.0
	6	88.1	88.1	78.0
	7	106.1	106.1	88.0
	8	107.9	108.0	82.1

STATION		AM FACTORY PRESET DATA (kHz)		
PAGE	NO.	U, C, R, T, K	A, B, G, L	J
B/D	1	630	630	630
	2	1080	1080	1080
	3	1440	1440	1440
	4	530	531	531
	5	1710	1611	1611
	6	900	900	900
	7	1350	1350	1350
	8	1400	1404	1404

10. AD DATA CHECK/FAN TEST

This menu is used to display the A/D conversion value of the terminals which detects panel keys of the main unit and protection functions in % using the sub-menu. During signal processing, the condition before execution is maintained.
When K0/K1 menu is selected, keys become non-operable due to detection of the values of all keys. However, it is possible to advance to the next sub-menu by turning the VOLUME of the main unit. When using this function, note that turning the VOLUME more than 2 clicks will cause the volume value to change.

* The figures in the diagram are given as reference only.

DC/PS (protection detection)
DC: DC protection value (Normal value: 7 to 100)
If DC is out of the normal value range, the protection function works to turn off the power.

PS: Power supply voltage protection value (Normal value: 28 to 47)
If PS is out of the normal value range, the protection function works to turn off the power.



THM/Fan (temperature detection/fan drive level)
THM: 500% display of the voltage based on the temperature detected value. Reference voltage : 5V (Normal value: 30 to 147)
Fan: Current fan drive level on the left and the past fan drive history on the right.
(Not applied to these models.)

REC-OUT
Not applied to these models.



10. AD DATA CHECK/FAN TEST

本体パネルキー、プロテクションなどを検出している端子のA/D変換の値を、サブメニューで%表示します。信号処理は実行前の状態を維持します。
K0/K1のメニューにすると、全キーの値を検出するためキー操作はできなくなりますが、本体のVOLUMEを回すことにより、次のサブメニューに進めることができます。このとき2クリック以上回すと、ボリューム値が変化するので注意してください。

※図中の数値は参考例です。

DC/PS（プロテクションの検出）
DC: DCプロテクションの値（正常値7～100）
DCは正常値を外れるとプロテクションが働き、電源オフされます。

PS: 電源電圧プロテクションの値（正常値28～47）
PSは正常値を外れるとプロテクションが働き、電源オフされます。

THM/Fan（温度検出/ファン駆動レベル）
THM: 温度検出値で電圧の500%表示、基準電圧は5V（正常値30～147）
Fan: 左側は現在のファン駆動レベル、右側は過去のファン駆動履歴
（このモデルには適用されません。）

REC-OUT
このモデルには適用されません。

IMP SW/POWER LIMIT (Impedance/power limiter detection)
IMP: 8 or 4 ohm impedance switch setting
PL: Power limiter detection value

The voltage value of pin No. 91 of IC601 is displayed, using 5V/256 as standard.

When the power is turned on, the impedance of the speaker being connected is automatically detected, using the input voltage value of pin No. 91 of IC601.

Input voltage value	0 - 490mV	491mV - 5V
Impedance of speaker	4 ohms	8 ohms

The port output is controlled by using the input voltage value of pin No. 91 of IC601.

When higher than VthH, the port output is changed from L to H.

When lower than VthL, the port output is changed from H to L.

Impedance	PORT	VthL	VthH
8/6 ohms	No.87	2.85V	3.37V
4 ohms	No.88	1.95V	2.47V

IMP SW/POWER LIMIT（インピーダンス/パワーリミッターの検出）
IMP: インピーダンスSW検出の値
PL: パワーリミッター検出の値

IC601 91ピンの電圧値を5V/256を基準にして表示します。

IC601 91ピンの入力電圧値により、ポート出力を制御します。

VthHを越えた場合、ポート出力をLからHにします。

VthLを下回った場合、ポート出力をHからLにします。

PORT	VthL	VthH
No.87	2.53V	3.05V

```
IMP:8   PL:55%
```

K0/K1 (Panel key of main unit)
A/D of the key fails to function properly when the standard value is deviated. In this case, check the constant of partial pressure resistor, solder condition, etc. Refer to table 1.

K0/K1（本体パネルキー）
キーのA/Dは基準値から外れると、正常な動きをしません。Table 1をご覧になり、各キーの分圧抵抗の定数、ハンダ不良等の確認をしてください。

```
K0:100%K1:100%
```

[Table 1]

Display (%)	K0	K1
0 - 6	SP A	INPUT MODE
7 - 13	SP B	6CH INPUT
14 - 21	STEREO	EDIT PRESET
22 - 31	◁ PROGRAM	FM/AM
32 - 41	PROGRAM ▷	TUNING MODE
42 - 53	PRESET PAGE	MEMORY
54 - 63	◁ PRESET/TUNING	PTY SEEK MODE
64 - 72	PRESET/TUNING ▷	PTY SEEK START
73 - 80	TONE SELECT	EON
81 - 88	TONE DOWN	RDS MODE
89 - 95	TONE UP	–

FAN DRIVE TEST (For models so equipped)
HIGH (Not applied to these models.)

FAN DRIVE TEST（ファン駆動テスト）
HIGH：ファン駆動強（このモデルには適用されません。）

```
FAN TEST:HIGH
```

FAN DRIVE TEST (For models so equipped)
MID (Not applied to these models.)

FAN DRIVE TEST（ファン駆動テスト）
MID：ファン駆動中（このモデルには適用されません。）

```
FAN TEST:MID
```

FAN DRIVE TEST (For models so equipped)
LOW (Not applied to these models.)

FAN DRIVE TEST（ファン駆動テスト）
LOW：ファン駆動弱（このモデルには適用されません。）

```
FAN TEST:LOW
```

11. IF STATUS (Input function status)

Using the sub-menu, the status data is displayed one after another in the hexadecimal notation.
During signal processing, the status before execution of this menu is maintained.

* Numeric values in the figure example are for reference.

IS1, 2 (Internal status):
Indicates the status information of the microprocessor.

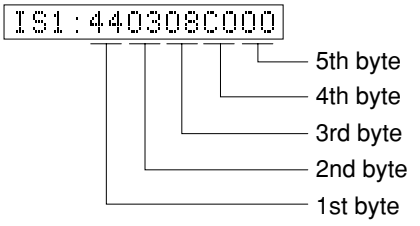

<1st byte> Digital input/output setting value
Upper 4 bits: REC OUT selected /
lower 4 bits: INPUT selected

Value	Choice	Preset name
0	NONE	
1	OPTA	V-AUX
2	OPTB	MD/CD-R
3	OPTC	DVD
4	OPTD	D-TV/CBL
8	COAXA	CD

<2nd byte> Fs information of reproduction signal

Display	00	01	02	03	04	05	06	0A	0B	0C	0D
Fs (kHz)	Analog	32	44.1	48	64	88.2	96	Unknown NRM	Unknown DBL	Unknown QUAD	Not defined

<3rd byte> Audio code mode information of reproduction signal

Display	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D
Audio Code	1+1	1/0	2/0	3/0	2/1	3/1	2/2	3/2	2/3	3/3	OVER 6.1	MULTI MONO	MULTI PCE	Unknown

<4th byte> Format information of reproduction signal
*1: Analog processing used for digital reproduction is not possible because of a commercial bit or 4-ch audio reason.

Display	Signal format
00	Analog (Unlock)
01	Incorrect digital (*1)
10	PCM Audio
20	Digital Data
21	IEC1937 Data
22	None PCM
23	Unknown
50	dts
51	Red dts
54	dts-ES MATRIX
58	dts-ES DISCRETE
5C	dts-ES (Both flag)
60	AAC
C0	Dolby Digital
C1	D.D. Karaoke
C4	D.D.6.1 (D.D.EX)

11. IF STATUS

サブメニュー操作により、以下のステータス情報を順次16進数で表示します。信号処理は、本メニュー実行前の状態を維持します。

※図中の数値は参考例です。

IS 1, 2（内部ステータス）:
マイコンのステータス情報を表示します。

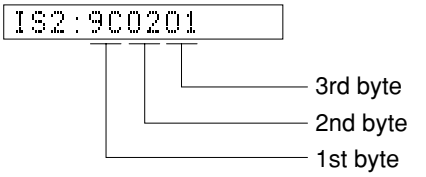

＜第1バイト＞デジタル入出力設定値
上位4bit REC OUT選択 /
下位4bit INPUT選択

＜第2バイト＞再生信号のFs情報

＜第3バイト＞再生信号のオーディオコードモード情報

＜第4バイト＞再生信号のフォーマット情報
*1: 業務用ビットや4chオーディオなどの理由で、デジタル再生できずアナログ処理されます。

<5th byte> Signal processing status information
*2: With digital signals other than 32kHz, 44.1kHz and 48kHz, through processing method is used for reproducible signals.

＜第5バイト＞信号処理ステータス情報
*2: 32kHz、44.1kHz、48kHz以外のデジタル信号の場合、再生可能な信号についてはスルー処理されます。

bit7	MUTE request	bit3	–
bit6	Red dts flashing	bit2	Through & bypass (*2)
bit5	6.1/EX processing	bit1	–
bit4	FULL MUTE (ON: 1)	bit0	dts analog mute

CS1-5: Indicates channel status information of the input signal (IEC60958).

CS 1-5: 入力信号のIEC60958チャンネルステータス情報を表示します。



BY1-4: Indicates information of the bit stream included in the DOLBY DIGITAL signal.

BY1-4: DOLBY DIGITAL信号に含まれるビットストリームインフォメーション情報を表示します。



BS1-5: Indicates information of the bit stream included in the dts signal.

BS1-5: dts信号に含まれるビットストリームインフォメーション情報を表示します。



YS1-3: Indicates device status information of YSS938 (IC601).
* The numeric value in the figure is an example for reference.

YS1-3: YSS938（IC601）のデバイスステータス情報を表示します
※ 図中数値は参考例です。



Byte No.	Function
1	YSS MUTE Reg
2	YSS MODE Reg
3	YSS IPORT BIT 7-0
4	YSS IPORT BIT 14-8
5	YSS OPORT



Byte No.	Function
1	IEC 1937 Preamble Pc
2	Data Stream Reg
3	Status Reg
4	YSS ZERO Reg
5	MIREG



Byte No.	Function
1	DIR Status
2	DIR fs
3	DIR fs count
4	YSS ZEROBF

SD: CS49329 Unsolicited Messages (AUTODETECT_RESPONSE)

SD: CS49329 Unsolicited Messages (AUTODETECT_RESPONSE)

MTT: Mute Trigger

MTT: Mute Trigger

Byte No.	Function
1	Mute condition
2	Factor of the last mute
3	Error count of YSS938-FSCNT
4	Mute count by YSS938-FSCNT
5	Error factor of down load of CS49329

12. DSP RAM CHECK

This menu is used to self-diagnose whether or not the bus connection for the YSS938 and the external RAM is made properly.
During signal processing, the status before execution of this menu is maintained.
The address bus and the data bus are checked and the connection condition is displayed.
When no error is detected, "NoEr" appears on display.

YSS938 Bus Check

Display	Description
WAIT	Bus is being checked.
NoEr	No error detected.
DATA	Data bus shorted or open.
RSCS	/RAS or /CAS shorted, or open.
ADDR	Address bus shorted or open.

PLD/SRAM BUS CHECK

Display	Description
WAIT	Bus is being checked.
None	No error detected.
EDxx	Data bus shorted or open. (XX: 00-07)
EAxx	Address bus shorted or open. (XX: 00-0E)

13. SD DL CODE

This menu is used to display the data version of the FLASH ROM, TOC information and sum calculated value for the second decoder.

RDV

Displays the data version.

TA 0-5

Displays the TOC information.

SA 0-5

Displays the sum calculated value.

12. DSP RAM CHECK

YSS938と外付けRAMとのバス接続の正否を自己診断します。
信号処理は、このメニューを実行する前の状態を維持します。
アドレスバス、データバスのチェックを行い、接続正否を表示します。
エラーが検出されなかった場合は、“NoEr”と表示されます。

YSS938 BUS CHECK

Display	Description
WAIT	Bus is being checked.
NoEr	No error detected.
DATA	Data bus shorted or open.
RSCS	/RAS or /CAS shorted, or open.
ADDR	Address bus shorted or open.

PLD/SRAM BUS CHECK

Display	Description
WAIT	Bus is being checked.
None	No error detected.
EDxx	Data bus shorted or open. (XX: 00-07)
EAxx	Address bus shorted or open. (XX: 00-0E)

13. SD DL CODE

2ndデコーダ用FLASH ROMのデータバージョン、TOC情報およびサム算出値を表示します。

RDV

データバージョンを表示します。

TA 0-5

TOC情報を表示します。

SA 0-5

サム算出値を表示します。

14. SOFT SW

This menu is used to switch the function settings on P.C.B. through the software so as to activate the product.
The protection function follows the P.C.B. settings. When connected to AC or in the maker preset state, the unit is initialized to the P.C. B. setting. Display of each function after initialization varies depending on settings on P.C.B. The operation mode can be changed by selecting the sub-menu and then using the EFFECT key. With SOF selected for the SW mode, the settings become effective.

SW MODE: PCB or SOFT can be selected.



MODEL SETTING: V440, V540, AX640, V640 or V740 can be selected.

TUNER DESTINATION: J, UC, ALG or R can be selected.

RDS: NOT or EXIST can be selected.



ZONE2: NOT or EXIST can be selected.



VIDEO FORMAT: NTSC or PAL can be selected.
(J model only)

14. SOFT SW

P.C.B.上の機能設定をソフト的に切り替えて、製品を動作させる機能です。
プロテクション機能は、P.C.B.の設定に従います。AC接続またはメーカープリセットで、P.C.B.の設定に初期化されます。初期化後の各機能の表示は、P.C.B.上の設定によります。操作は、サブメニューを選んだ後、EFFECTキーで切り替えます。SWモードをSOFTにすると、設定が有効になります。

SW MODE：PCBまたはSOFTを選択できます。

MODEL SETTING：V440、V540、AX640、V640、V740のいずれかを選択できます。

TUNER DESTINATION：J、UC、ALG、Rのいずれかを選択できます。

RDS：NOTまたはEXISTを選択できます。

ZONE2：NOTまたはEXISTを選択できます。

VIDEO FORMAT：NTSCまたはPALを選択できます。
（Jモデルのみに適用）

15. MICROPROCESSOR INFORMATION

The version, checksum and the port specified by the microprocessor are displayed. The signal is processed using EFFECT OFF. The checksum is obtained by adding the data at every 8 bits for each program area and expressing the result as a 4-figure hexadecimal data.

15. マイコン情報

サブメニューは4つあります。
プログラムのバージョン、チェックサム、マイコンの指定ポートを表示します。
信号はエフェクトOFFです。チェックサムは、プログラムエリア別にデータを8ビットごとに加算していき、4桁の16進データで現したものです。

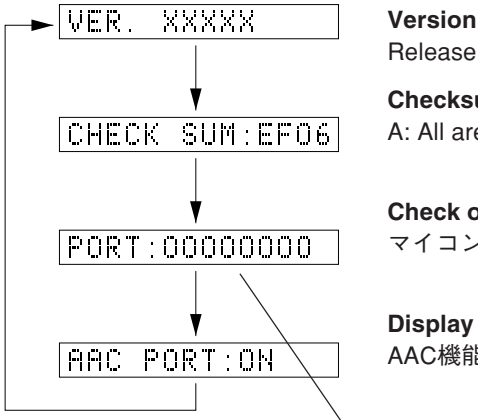

Version / バージョン情報
Release 1 digit / Main version 2 digit / DSP version 2 digit

Checksum / チェックサム表示
A: All area

Check of port setting for judging microprocessor function
マイコンの機能判定用ポート設定確認

Display of AAC function detection port state
AAC機能検出ポート状態表示

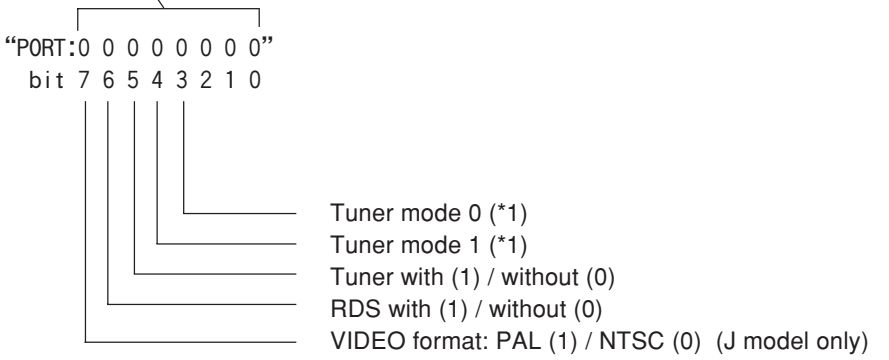

*1

Type	Tuner mode		Port 3	Frequency range	
	1	0	(type 2)	FM	AM
0	0	0	–	76.0-90.0MHz / 100kHz	531-1611kHz / 9kHz
1	1	0	–	87.5-108.0MHz / 50kHz	531-1611kHz / 9kHz
2	0	1	–	87.5-107.9MHz / 200kHz	530-1710kHz / 10kHz
3	1	1	Low	87.5-108.0MHz / 100kHz	530-1710kHz / 10kHz
			High	87.5-108.0MHz / 50kHz	531-1611kHz / 9kHz

■ AMP ADJUSTMENT / アンプ部調整

Confirmation of Idling Current of Main (1) P. C. B.

- Right after power is turned on, confirm that the voltage across the terminals of R164 (Main Lch), R168 (Main Rch), R181 (Center), R175 (Rear Lch), R177 (Rear Rch), R416 (Rear Cch) are between 0.1mV and 10.0mV.
- If it exceeds 10.0mV, open (cutoff) R109 (Main Lch), R116 (Main Rch), R136 (Center), R122 (Rear Lch), R129 (Rear Rch), R403 (Rear Cch) and reconfirm the voltage.

  Attention
  If the idle current exceeds 10.0mV after an amplifier repair, first check for a defective component before cutting the bias resistor.
- Confirm that the voltage is 0.2mV ~ 15.0mV after 60 minutes.

メイン(1)基板のアイドリング電流の確認

● 電源投入直後、R164(MAIN Lch)、R168(MAIN Rch)、R181(CENTER)、R175(REAR Lch)、R177(REAR Rch)、R416(REAR Cch)の端子間電圧を測定し、0.1mVから10.0mVの間であることを確認してください。

● 電圧が10mVを超えている場合は、R109(MAIN Lch)、R116(MAIN Rch)、R136(CENTER)、R122(REAR Lch)、R129(REAR Rch)、R403(REAR Cch)をカットし、電圧を再確認してください。

注意
パワーアンプ修理後に10.0mVを超えている場合は、抵抗をカットする前に故障箇所を調べてください。

● 60分後、電圧が0.2mV～15.0mVであることを確認してください。

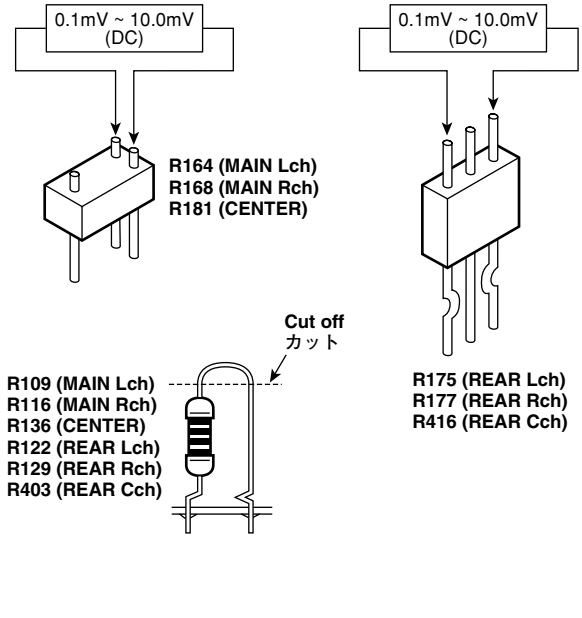

■ DISPLAY DATA

● **V501 : HNA-16MM43 (WA531200)**

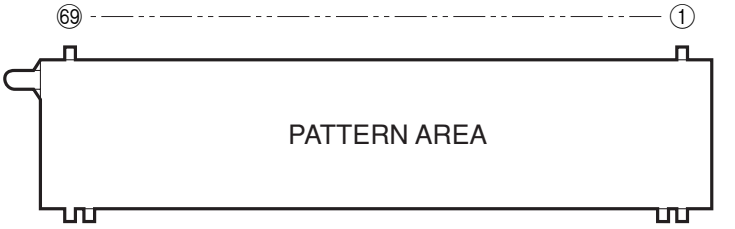

● **PIN CONNECTION**

Pin No.	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35
Connection	F2	F2	NP	NP	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24	P25	P26	P27	P28	P29	P30	P31

Pin No.	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
Connection	P32	P33	P34	P35	P36	P37	P38	NX	NX	NX	NX	NX	NX	NX	16G	15G	14G	13G	12G	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G	NP	NP	F1	F1

Note : 1) F1, F2 ..... Filament 2) NP ..... No pin 3) G1 ~ 16 ..... Grid 4) NX ..... No extened 5) P1 ~ 38 ..... Anode

● **GRID ASSIGNMENT**

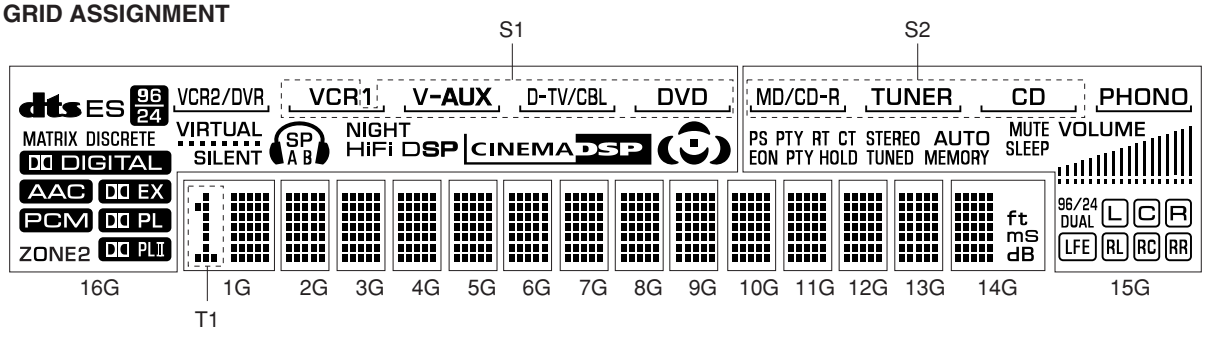

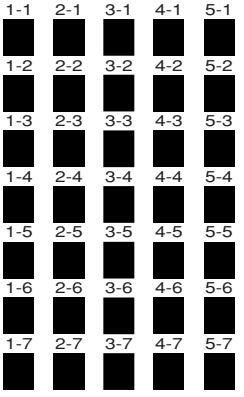

(1G~14G)

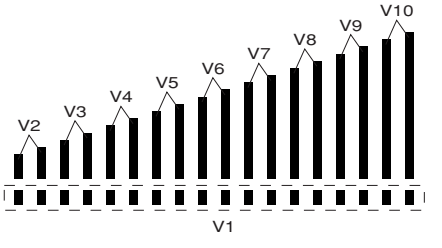

(15G)



(16G)

● **ANODE CONNECTION**

	16G	15G	14G	13G~2G	1G
P1	dts	S2	1-1	1-1	1-1
P2	ES	PHONO	2-1	2-1	2-1
P3	MATRIX	(MD/CD-R)	3-1	3-1	3-1
P4	DISCRETE	(TUNER)	4-1	4-1	4-1
P5	96/24	(CD)	5-1	5-1	5-1
P6	DD DIGITAL	(PHONO)	1-2	1-2	1-2
P7	DD EX	PS	2-2	2-2	2-2
P8	DD PL	PTY	3-2	3-2	3-2
P9	DD PL II	RT	4-2	4-2	4-2
P10	AAC	CT	5-2	5-2	5-2
P11	PCM	EON	1-3	1-3	1-3
P12	ZONE2	PTY HOLD	2-3	2-3	2-3
P13	VIRTUAL	STEREO	3-3	3-3	3-3
P14	SILENT	AUTO	4-3	4-3	4-3
P15		TUNED	5-3	5-3	5-3
P16	SP	MEMORY	1-4	1-4	1-4
P17	A	MUTE	2-4	2-4	2-4
P18	B	SLEEP	3-4	3-4	3-4
P19	HiFi DSP	VOLUME	4-4	4-4	4-4
P20	CINEMA DSP	V1	5-4	5-4	5-4
P21	R1	V2	1-5	1-5	1-5
P22	R2	V3	2-5	2-5	2-5
P23	R3	V4	3-5	3-5	3-5
P24	R4	V5	4-5	4-5	4-5
P25	R5	V6	5-5	5-5	5-5
P26	S1	V7	1-6	1-6	1-6
P27	VCR2/DVR	V8	2-6	2-6	2-6
P28	(VCR) 1	V9	3-6	3-6	3-6
P29	(VCR2/DVR)	V10	4-6	4-6	4-6
P30	(VCR1)	96/24	5-6	5-6	5-6
P31	(V-AUX)	DUAL	1-7	1-7	1-7
P32	(D-TV/CBL)	LFE	2-7	2-7	2-7
P33	(DVD)	L	3-7	3-7	3-7
P34	NIGHT	C	4-7	4-7	4-7
P35	–	R	5-7	5-7	5-7
P36	–	RL	ft	–	T1
P37	–	RC	ms	–	–
P38	–	RR	dB	–	–

■ IC DATA

IC601: M3062VMGP (FUNCTION P.C.B.)
16bit μ-COM (Main CPU)

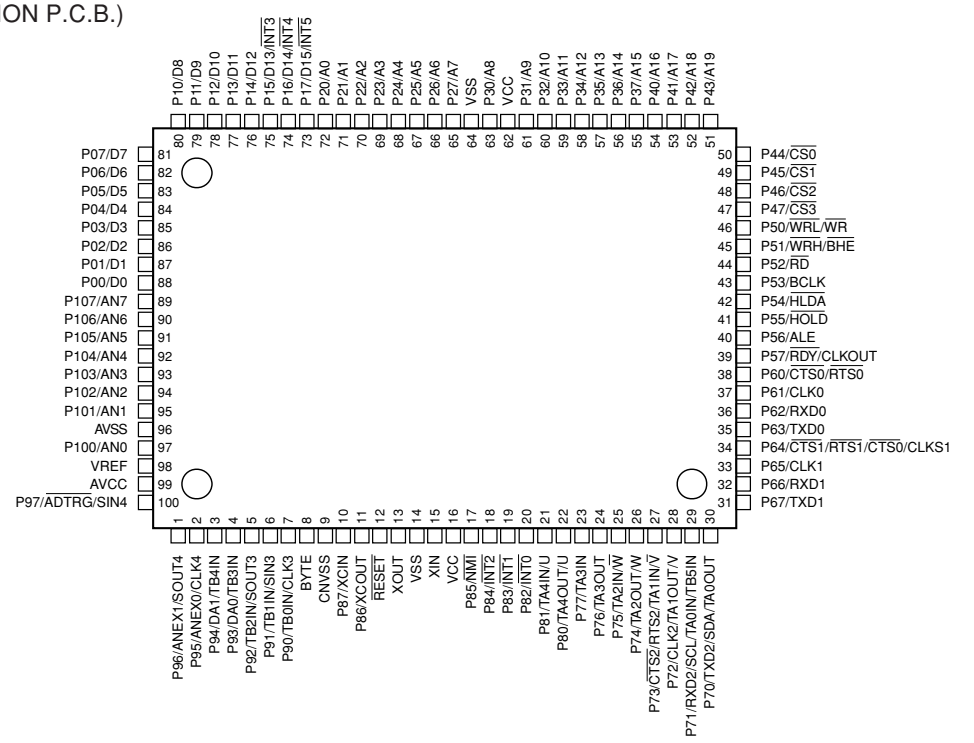

No.	Port No.	Function name	I/O	Detail of function
1	SOUT4	DTFD	SO	FL Driver TxD
2	CLK4	CKFD	SCK	FL Driver CLOCK
3	P94	/BLK	O	FL Driver OFF
4	P93	ISA	I	Input Select Rotary A
5	SOUT3	SDM	SO	YSS938 TxD
6	SIN3	SDD	SI	YSS938 RxD
7	CLK3	YSSCK	SCK	YSS938 CLOCK
8	BYTE	BYTE	VSS	Vss: when single chip mode is used
9	CNVss	CNVss	Vss/Vcc	Vss: when single chip mode is used, Vcc: when flash writing is used
10	P87	CSY	O	YSS938 CE
11	P86	/ICD	O	YSS938/DA/AD/CODEC/DEM
12	RESET	RESET	I	Reset
13	Xout	Xout		Oscillator Out
14	Vss	Vss	Vss	μ-COM Ground
15	Xin	Xin	16MHz	Oscillator in
16	Vcc	Vcc	Vcc (BU)	μ-COM power supply, +5V
17	NMI	NMI	Vcc (BU)	Connect to Vcc because it is unused.
18	INT2	INT938	INT	YSS928 IPINT/MUTE/DIR
19	INT1	PSW	INT	Standby SW Input
20	INT0	REM1	INT	Remote Control Input
21	P81	ISB	I	Input Select Rotary B
22	TA4out	FAN	O	Fan Control
23	P77	/HP	I (IPU)	Headphone Detect
24	P76	VRA	I (IPU)	Volume Rotary A
25	P75	VRB	I (IPU)	Volume Rotary B
26	P74	CSN	O	Chip Select for DAC
27	P73	/ICCDK	O	CODEC Reset
28	CLK2		SCK	Open
29	P71		O (External PU)	Open
30	TXD2		SO (External PU)	Open
31	TXD1	TXDF	FLASH	Flash ROM Serial Write Data Transmission
32	RXD1	RXDF	FLASH	Flash ROM Serial Write Data Reception
33	CLK1	CLKF	FLASH	Flash ROM Serial Clock
34	P64	BSY	FLASH	Flash BUSY Signal Output
35	TXD0	CSR	SO	CS493x RxD
36	RXD0	CST	SI	CS493x TxD
37	CLK0	CSC	SCK	CS493x Clock
38	P60	/CEEEP	O	EEPROM CE
39	P57	SDTR	O	RDS/OSD TxD
40	P56	SDRR	SI/I (IPU)	CS493x RxD
41		/EMP	GND	For Flash Writing (LO)
42	P54	SCKR	SCK	RDS/OSD Clock
43	P53	/CSCS	O	CS493x CS

IC601: M3062VMGP (FUNCTION P.C.B.)
16bit μ-COM (Main CPU)

No.	Port No.	Function name	I/O	Detail of function
44	P52	/ICCS	O	CS493x Reset
45	P51	/CSPLD	O	Digital External Control IC CE
46		/CE	I	For Flash Writing (HI)
47	P47	CSINT	I/O	CS-DSP INT/ABOOT
48	P46	/FMT	O	Mute Main/Rear, Pre Out
49	P45		O	Open
50	P44	/HPMT	O	Headphone Mute Output
51	P43	/MTSW	O	Mute LFE
52	P42	/SWMIX	O	SW Mix
53	P41	/FMIX	O	CT Mix
54	P40	GAIN	O	
55	P37		O/I	Open
56	P36	HPF	O	HPF
57	P35	MODE	O	Mode
58	P34	CKBD	O	Clock Line for BD38xx System Control
59	P33	DTBD	O	Data Line for BD38xx System Control
60	P32	VIA	O	Video Selector A
61	P31	VIB	O	Video Selector B
62	Vcc	Vcc	Vcc (BU)	Microprocessor Power Supply, +5V
63	P30		O	Open
64	Vss	Vss	Vss	Microprocessor Ground
65	P27	/VR1	O	Video Rec Out Selector 1
66	P26		O	Open
67	P25	CMP0	O	Component Selector 2
68	P24	CMP1	O	Component Selector 1
69	P23	YCSEP	O	Y/C Separation Select
70	P22		O/I	Open
71	P21		O	Open
72	P20	RDSE	O/I	RDS Enble, RDS Present/Absent
73	P17	CEP/TUN1	O/I	PLL IC Enable/Destination Discriminate 1
74	INT4	PDET	INT	Power Down Detect INT
75	INT3		INT	Open
76	P14	SCKP/TUN0	O/I	PLL IC Clock/Destination Discriminate 0
77	P13	SDTP	O	PLL IC TxD
78	P12	SDRP	I (IPU)	OLL IC RxD
79	P11	TUNED	I (IPU)	Tuned
80	P10	/ST	I (IPU)	Tuner/ST
81	P07	TMT	O	Tuner Mute
82	P06	PRY	O	Power Relay Output
83	P05	ERY	O	Effect SP Relay Output
84	P04	MBRY	O	Main B SP Relay Output
85	P03	MARY	O	Main A SP Relay Output
86	P02	PRI	I	Protection Excess Current Detect
87	P01	RIMA	O	Power Limiter A
88	P00	RIMB	O	Power Limiter B
89	AN7	MODEL	AD	Connection Discriminate
90	AN6	PRD	AD	Protection DC Detect
91	AN5	PREMT	AD	Power Limiter Detect
92	AN4	THM	AD	Temperature Detect
93	AN3		AD	Open
94	AN2	ADKEY0	AD	Key AD Input 0
95	AN1	ADKEY1	AD	Key AD Input 1
96	Avss	Avss	Vss	AD Ground
97	AN0	PRV	AD	Protection Power Supply Voltage Detect
98	Vref	Vref	(+5v)	AD Reference
99	Avcc	Avcc	Vcc (BU)	AD Power Supply
100	P97	CEFD	O	FL Driver CE

IC601 : YSS938 (DSP P.C.B.)
DSP

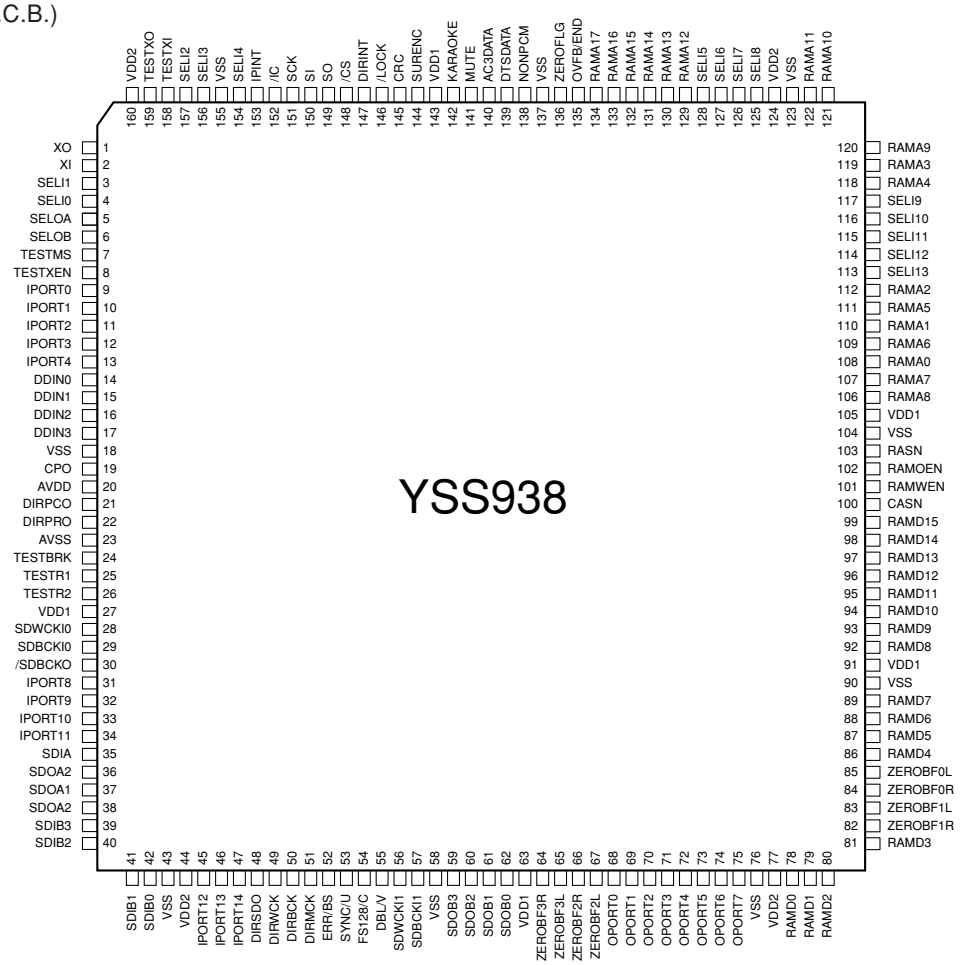

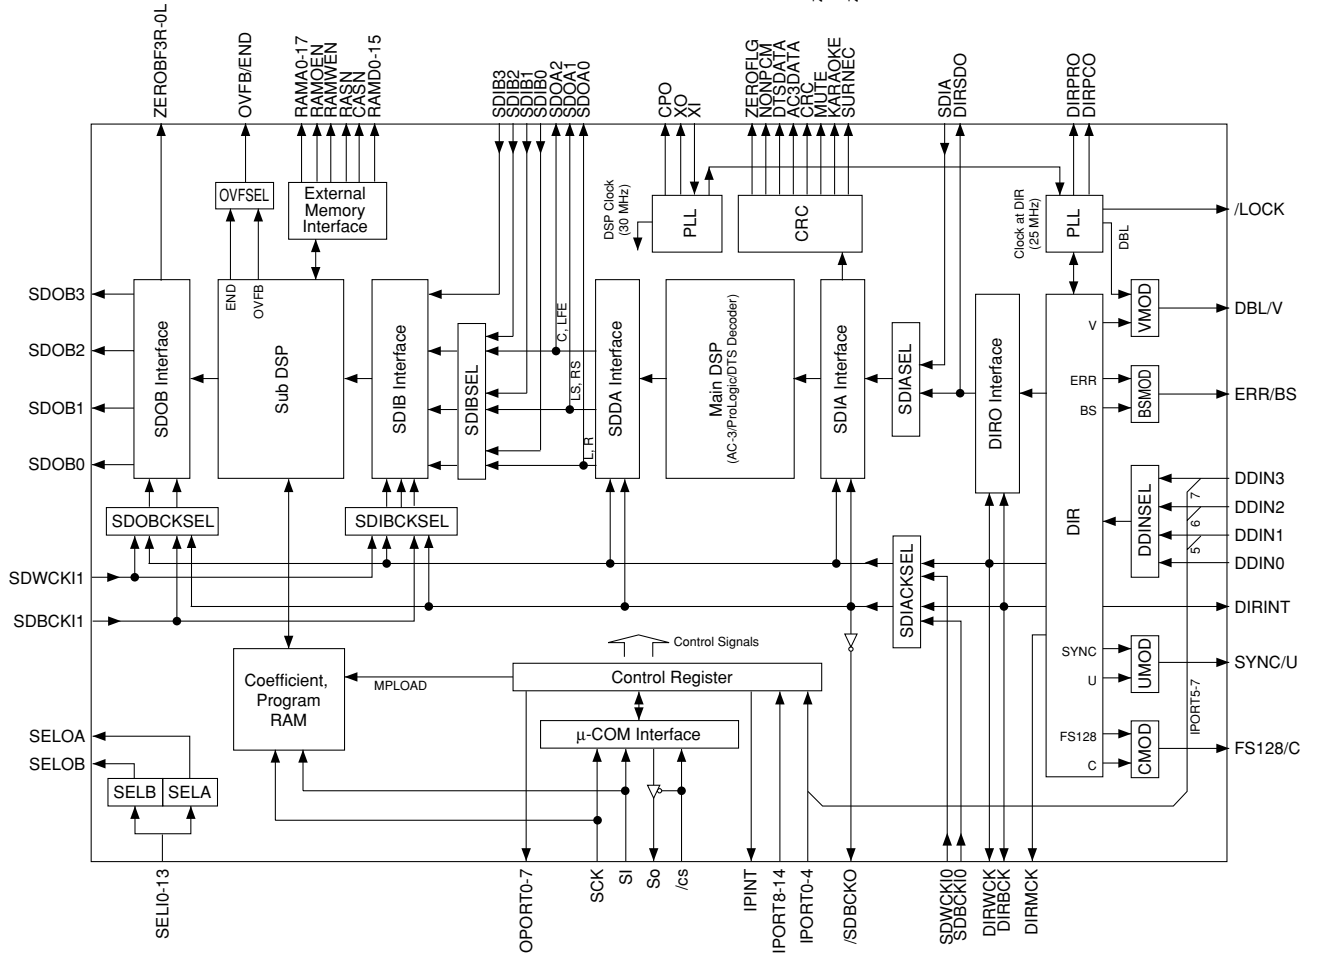

IC601 : YSS938 (DSP P.C.B.)
DSP

No.	Name	I/O	Function	
1	XO	O	Crystal oscillator connecting terminal	
2	XI	I	Crystal oscillator connecting terminal (24.576MHz)	
3	SELI1	I+	Built-in selector input 1	(AXD)
4	SELI0	I+	Built-in selector input 0	(GND)
5	SELOA	O+	Built-in selector output A	(ISEL)
6	SELOB	O+	Built-in selector output B	(RSEL)
7	TESTMS	I+	Test terminal (unconnected)	
8	TESTXEN	I+	Test terminal (unconnected)	
9	IPORT0	I+	General purpose input terminal	(CXDTA)
10	IPORT1	I+	General purpose input terminal	(CXDTB)
11	IPORT2	I+	General purpose input terminal	
12	IPORT3	I+	General purpose input terminal	
13	IPORT4	I+	General purpose input terminal	
14	DDIN0	Is	DIR: Digital audio interface data input terminal 0	(ISEL)
15	DDIN1	Is	DIR: Digital audio interface data input terminal 1/General purpose input terminal	(Pull down)
16	DDIN2	Is	DIR: Digital audio interface data input terminal 2/General purpose input terminal	(Pull down)
17	DDIN3	Is	DIR: Digital audio interface data input terminal 3/General purpose input terminal	(Pull down)
18	VSS		Ground terminal	
19	CPO	A	PLL filter connecting terminal	
20	AVDD		+3.3V power terminal (for DIR)	
21	DIRPCO	A	DIR: PLL filter connecting terminal	
22	DIRPRO	A	DIR: PLL filter connecting terminal	
23	AVSS		Ground terminal (for DIR)	
24	TESTBRK	I+	Test terminal (unconnected)	
25	TESTR1	I+	PLL initialization signal input terminal for DSP	(/ICD)
26	TESTR2	I+	Test terminal (unconnected)	
27	VDD1		+3.3V power terminal (for terminal section)	
28	SDWCKI0	I+	Word clock input terminal for SDIA, SDOA, SDIB, SDOB interface	(WCKG)
29	SDBCKI0	I+	Bit clock input terminal for SDIA, SDOA, SDIB, SDOB interface	(BCKG)
30	/SDBCK0	O	DIRBCK or SDBCKI0 invert clock output terminal (Unconnected)	
31	IPORT8	I+	IPINT general purpose input terminal	
32	IPORT9	I+	IPINT general purpose input terminal	(NONPCM)
33	IPORT10	I+	IPINT general purpose input terminal	(NONPCM)
34	IPORT11	I+	IPINT general purpose input terminal	(MUTE)
35	SDIA	I	AC-3/DTS bit stream (or PCM) data input terminal to Main DSP	(SDIA)
36	SDOA2	O	PCM output terminal from Main DSP (C/LFE output)	
37	SDOA1	O	PCM output terminal from Main DSP (LS/RS output)	
38	SDOA0	O	PCM output terminal from Main DSP (L/R output)	
39	SDIB3	I+	PCM input terminal 3 to Sub DSP	
40	SDIB2	I+	PCM input terminal 2 to Sub DSP	
41	SDIB1	I+	PCM input terminal 1 to Sub DSP	
42	SDIB0	I+	PCM input terminal 0 to Sub DSP	
43	VSS		Ground terminal	
44	VDD2		+2.5V power terminal (for internal circuit)	
45	IPORT12	I+	IPINT general purpose input terminal	(DIRINT)
46	IPORT13	I+	IPINT general purpose input terminal	(DBL)
47	IPORT14	I+	IPINT general purpose input terminal	(DBL)
48	DIRSDO	O	AC-3/DTS bit stream (or PCM) data output terminal from DIR	
49	DIRWCK	O	DIR: Serial data word clock (fs) output terminal	(WCK)
50	DIRBCK	O	DIR: Serial data bit clock (64fs) output terminal	(BCK)
51	DIRMCK	O	DIR: Serial data master clock (256fs or 128fs) output terminal	(MCK)
52	ERR/BS	O	DIR: Data error detect output/block start output terminal (Unconnected)	
53	SYNC/U	O	DIR: Serial data synchronous timing output/user data output terminal (Unconnected)	
54	FS128/C	O	DIR: Serial data master clock 128fs output/channel status output terminal	(FS128)
55	DBL/V	O	DIR: Double rate clock output/validity flag output terminal	(DBL)

IC601 : YSS938 (DSP P.C.B.)
DSP

No.	Name	I/O	Function	
56	SDWCKI1	I+	Word clock input terminal for SDIB, SDOB interface	(WCKG)
57	SDBCKI1	I+	Bit clock input terminal for SDIB, SDOB interface	(BCKG)
58	VSS		Ground terminal	
59	SDOB3	O	PCM output terminal from Sub DSP	
60	SDOB2	O	PCM output terminal from Sub DSP	
61	SDOB1	O	PCM output terminal from Sub DSP	
62	SDOB0	O	PCM output terminal from Sub DSP	
63	VDD1		+3.3V power terminal (for terminal section)	
64	ZEROBF3R	O+	SDOB3 Rch zero flag output terminal	(ZF3R)
65	ZEROBF3L	O+	SDOB3 Lch zero flag output terminal	(ZF3L)
66	ZEROBF2R	O+	SDOB2 Rch zero flag output terminal	(ZF2R)
67	ZEROBF2L	O+	SDOB2 Lch zero flag output terminal	(ZF2L)
68	OPORT0	O	General purpose output terminal	(/RINH1)
69	OPORT1	O	General purpose output terminal	(/RINH2)
70	OPORT2	O	General purpose output terminal	(/ICDA)
71	OPORT3	O	General purpose output terminal	(/ICAD)
72	OPORT4	O	General purpose output terminal	(DPS)
73	OPORT5	O	General purpose output terminal	(RST)
74	OPORT6	O	General purpose output terminal	(ERROR)
75	OPORT7	O	General purpose output terminal	(/PRST)
76	VSS		Ground terminal	
77	VDD2		+2.5V power terminal (for internal circuit)	
78	RAMD0	I+/O	Sub DSP: External memory data terminal 0	
79	RAMD1	I+/O	Sub DSP: External memory data terminal 1	
80	RAMD2	I+/O	Sub DSP: External memory data terminal 2	
81	RAMD3	I+/O	Sub DSP: External memory data terminal 3	
82	ZEROBF1R	O+	SDOB1 Rch zero flag output terminal	(ZF1R)
83	ZEROBF1L	O+	SDOB1 Lch zero flag output terminal	(ZF1L)
84	ZEROBF0R	O+	SDOB0 Rch zero flag output terminal	(ZF0R)
85	ZEROBF0L	O+	SDOB0 Lch zero flag output terminal	(ZF0L)
86	RAMD4	I+/O	Sub DSP: External memory data terminal 4	
87	RAMD5	I+/O	Sub DSP: External memory data terminal 5	
88	RAMD6	I+/O	Sub DSP: External memory data terminal 6	
89	RAMD7	I+/O	Sub DSP: External memory data terminal 7	
90	VSS		Ground terminal	
91	VDD1		+3.3V power terminal (for terminal section)	
92	RAMD8	I+/O	Sub DSP: External memory data terminal 8	
93	RAMD9	I+/O	Sub DSP: External memory data terminal 9	
94	RAMD10	I+/O	Sub DSP: External memory data terminal 10	
95	RAMD11	I+/O	Sub DSP: External memory data terminal 11	
96	RAMD12	I+/O	Sub DSP: External memory data terminal 12	
97	RAMD13	I+/O	Sub DSP: External memory data terminal 13	
98	RAMD14	I+/O	Sub DSP: External memory data terminal 14	
99	RAMD15	I+/O	Sub DSP: External memory data terminal 15	
100	CASN	O	Sub DSP: Column address strobe output terminal for external DRAM	
101	RAMWEN	O	Sub DSP: Write enable terminal for external memory	
102	RAMOEN	O	Sub DSP: Output enable terminal for external memory	
103	RASN	O	Sub DSP: Low address strobe output terminal for external DRAM	
104	VSS		Ground terminal	
105	VDD1		+3.3V power terminal (for terminal section)	
106	RAMA8	O	Sub DSP: External memory address terminal 8	
107	RAMA7	O	Sub DSP: External memory address terminal 7	
108	RAMA0	O	Sub DSP: External memory address terminal 0	
109	RAMA6	O	Sub DSP: External memory address terminal 6	
110	RAMA1	O	Sub DSP: External memory address terminal 1	

IC601 : YSS938 (DSP P.C.B.)
DSP

No.	Name	I/O	Function	
111	RAMA5	O	Sub DSP: External memory address terminal 5	
112	RAMA2	O	Sub DSP: External memory address terminal 2	
113	SELI13	I+	Built-in selector input 13 (Unconnected)	
114	SELI12	I+	Built-in selector input 12	
115	SELI11	I+	Built-in selector input 11 (Unconnected)	
116	SELI10	I+	Built-in selector input 10 (Unconnected)	
117	SELI9	I+	Built-in selector input 9	(CXB)
118	RAMA4	O	Sub DSP: External memory address terminal 4	
119	RAMA3	O	Sub DSP: External memory address terminal 3	
120	RAMA9	O	Sub DSP: External memory address terminal 9 (Unconnected)	
121	RAMA10	O	Sub DSP: External memory address terminal 10 (Unconnected)	
122	RAMA11	O	Sub DSP: External memory address terminal 11 (Unconnected)	
123	VSS		Ground terminal	
124	VDD2		+2.5V power terminal (for internal circuit)	
125	SELI8	I+	Built-in selector input 8	(CXA)
126	SELI7	I+	Built-in selector input 7	(GND)
127	SELI6	I+	Built-in selector input 6	(OPTF)
128	SELI5	I+	Built-in selector input 5 (Unconnected)	
129	RAMA12	O	Sub DSP: External memory address terminal 12 (Unconnected)	
130	RAMA13	O	Sub DSP: External memory address terminal 13 (Unconnected)	
131	RAMA14	O	Sub DSP: External memory address terminal 14 (Unconnected)	
132	RAMA15	O	Sub DSP: External memory address terminal 15 (Unconnected)	
133	RAMA16	O	Sub DSP: External memory address terminal 16 (Unconnected)	
134	RAMA17	O	Sub DSP: External memory address terminal 17 (Unconnected)	
135	OVFB/END	O	Sub DSP: Overflow/program end detect terminal (Unconnected)	
136	ZEROFLG	O	Main DSP: Zero flag output terminal (Unconnected)	
137	VSS		Ground terminal	
138	NONPCM	O	Main DSP: Non-PCM data detect terminal	
139	DTSDATA	O	Main DSP: DTS data detect terminal (Unconnected)	
140	AC3DATA	O	Main DSP: AC3 data detect terminal (Unconnected)	
141	MUTE	O	Main DSP: Auto mute detect terminal	
142	KARAOKE	O	Main DSP: AC3 KARAOKE data detect terminal (Unconnected)	
143	VDD1	+3.3V	power terminal (for terminal section)	
144	SURENC	O	Main DSP: AC-3 2/0 mode Dolby surround encode input detect terminal (Unconnected)	
145	CRC	O	Main DSP: AC3 CRC error detect terminal (Unconnected)	
146	/LOCK	O	DIR: PLL lock detect terminal (Unconnected)	
147	DIRINT	O	DIR: Interrupt output terminal	
148	/CS	Is	Microprocessor interface chip select input terminal	(/CSY)
149	SO	Ot	Microprocessor interface data output terminal	(SDDY)
150	SI	Is	Microprocessor interface data input terminal	(SDMYB)
151	SCK	Is	Microprocessor interface clock input terminal	(SCKYB)
152	/IC	Is	Initial clear input terminal	(/ICYP)
153	IPINT	O+	Interrupt output terminal by IPORT 8-14	
154	SELI4	I+	Built-in selector input 4	(OPTD)
155	VSS		Ground terminal	
156	SELI3	I+	Built-in selector input 3	(OPTC)
157	SELI2	I+	Built-in selector input 2	(OPTB)
158	TESTXI	I	Test terminal (should be always connected to VSS)	
159	TESTXO	O	Test terminal (Unconnected)	
160	VDD2	+2.5V	power terminal (for internal circuit)	

Is: Schmidt trigger input terminal
I+: Input terminal with pull-up resistor
O: Digital output terminal
Ot: 3-state digital output terminal
A: Analog terminal

■ BLOCK DIAGRAM (1/2)

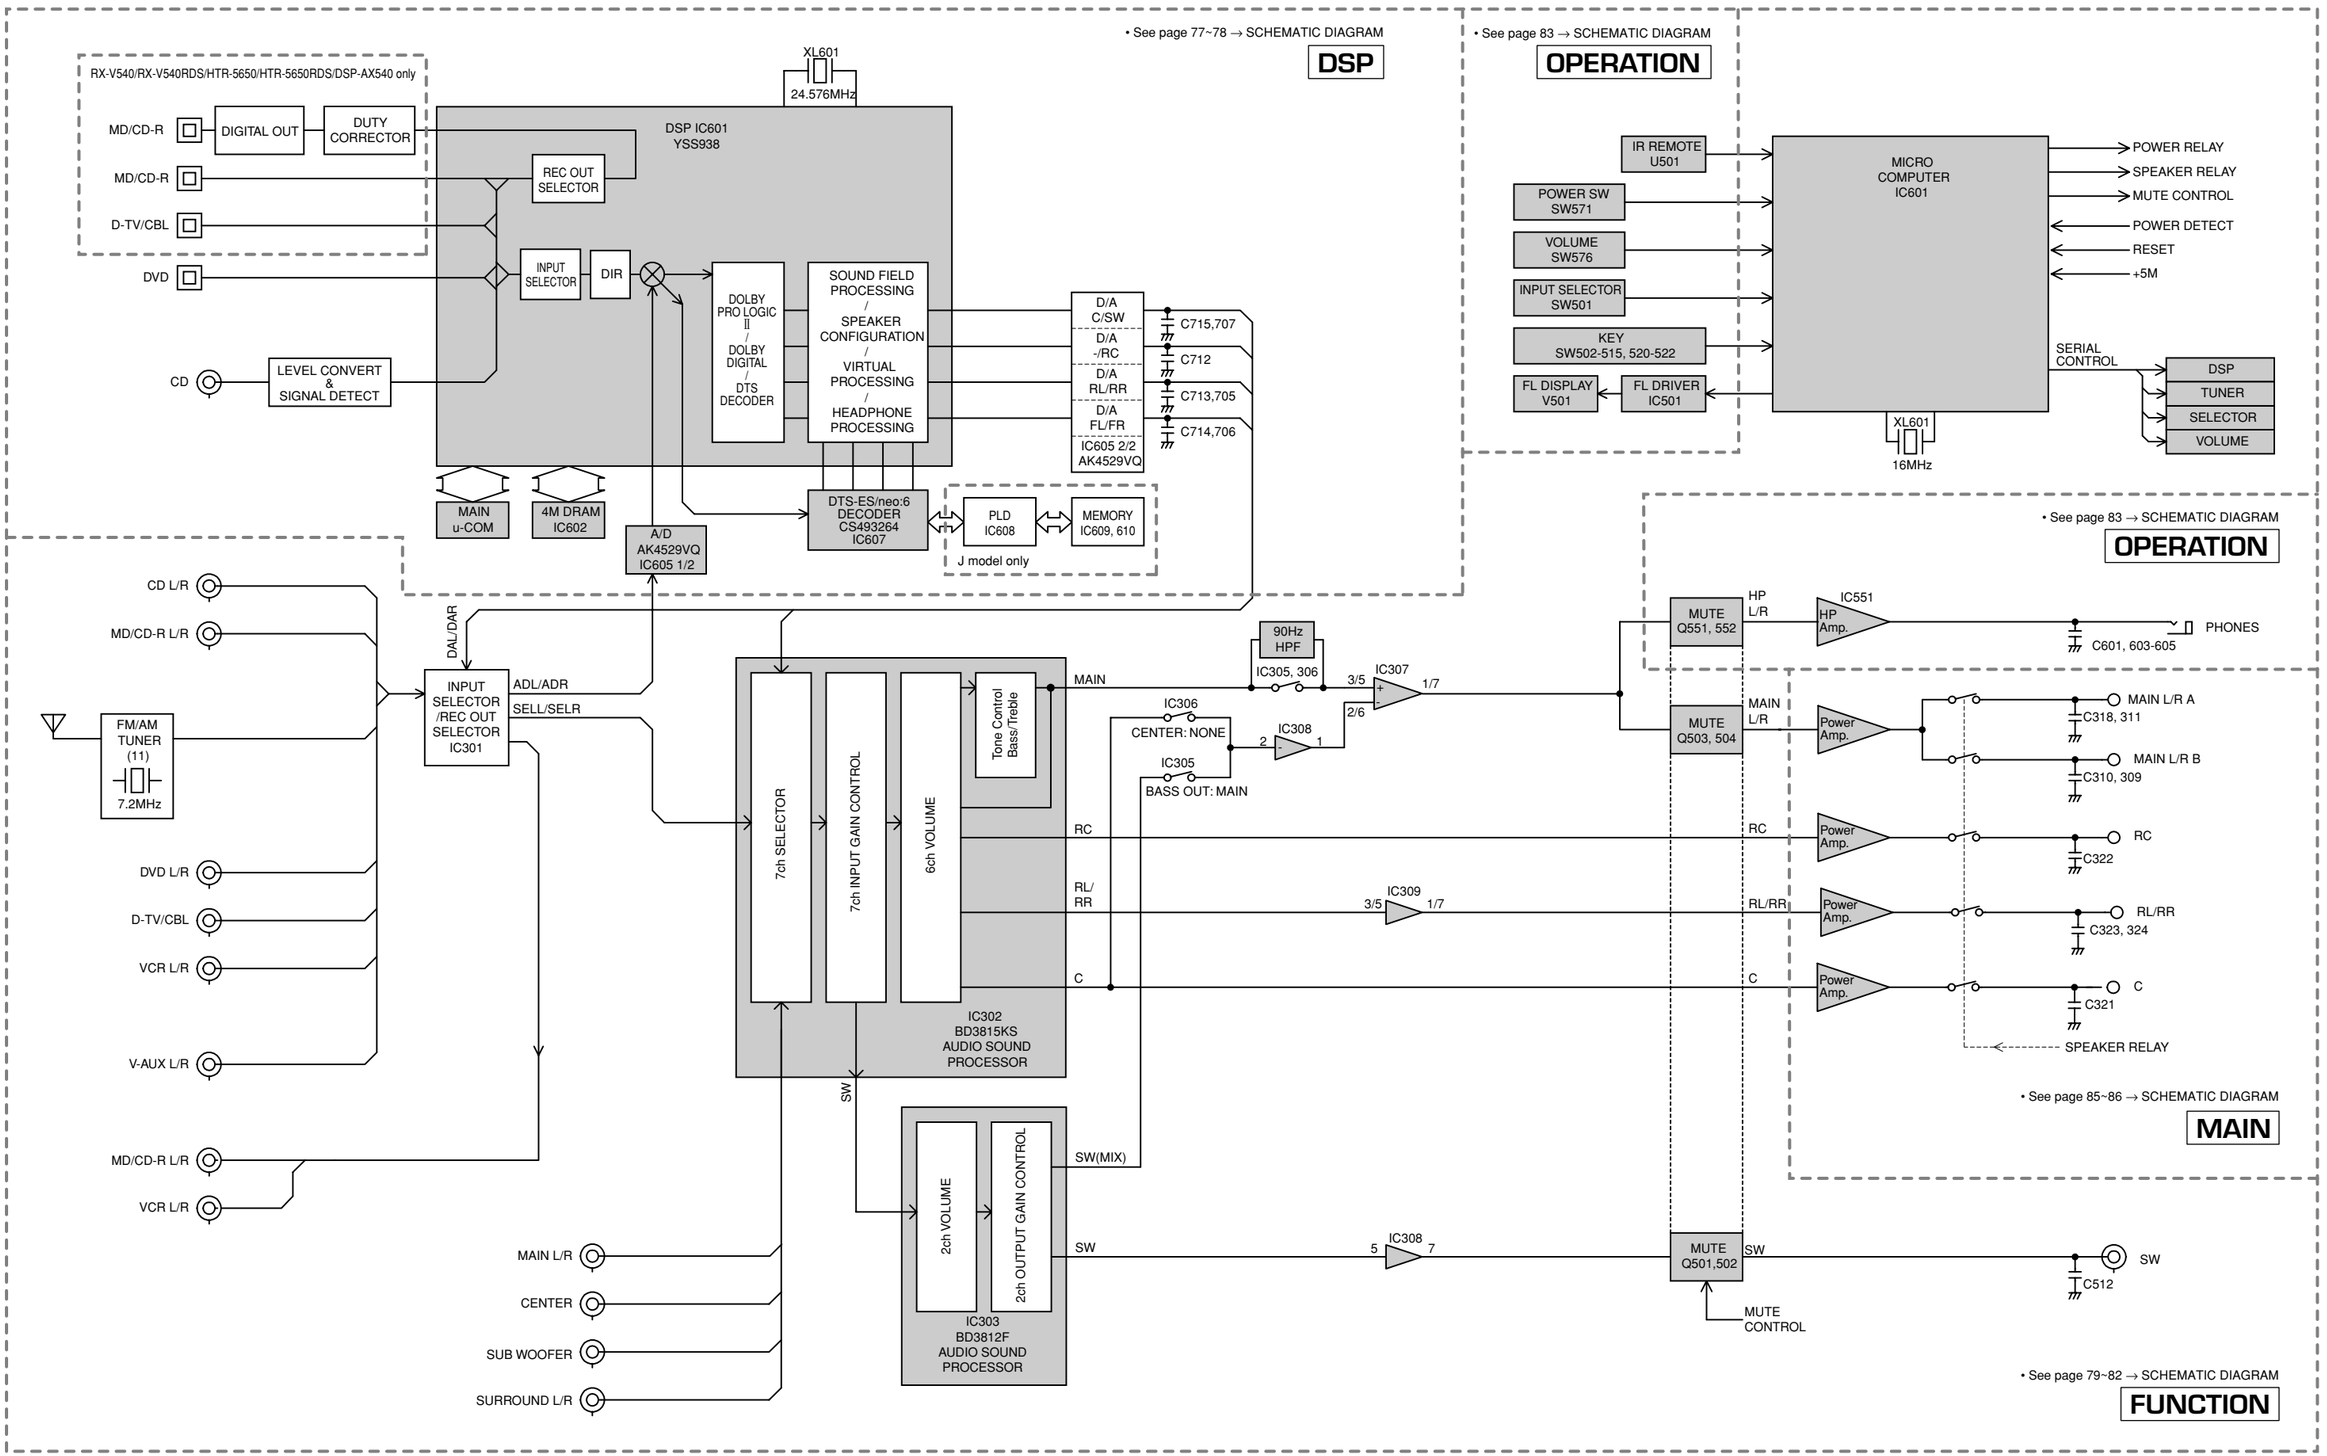

■ BLOCK DIAGRAM (2/2)

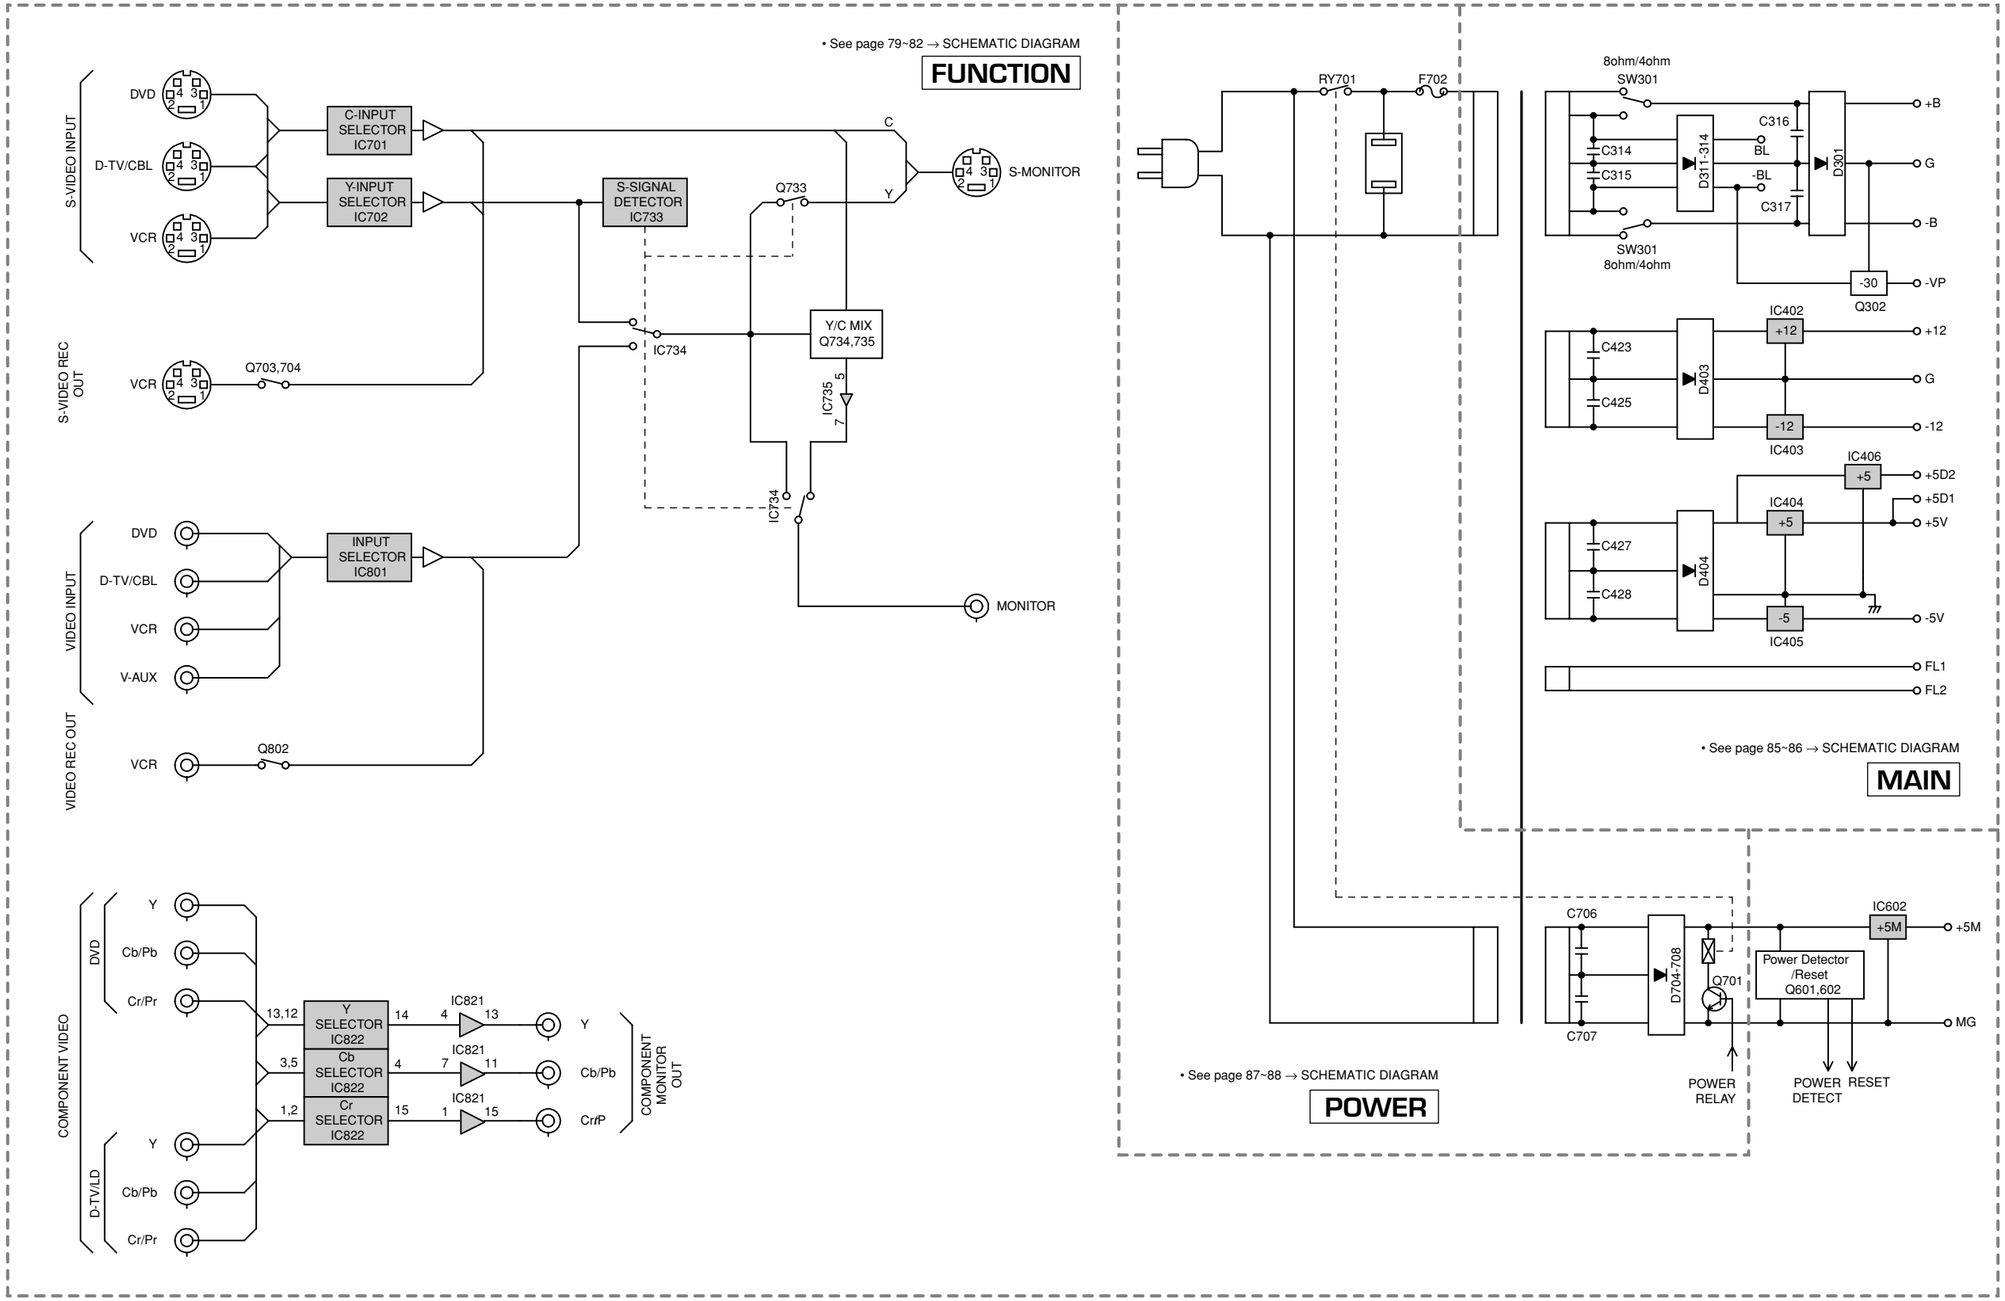

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

DSP P. C. B. (Lead Type Device)

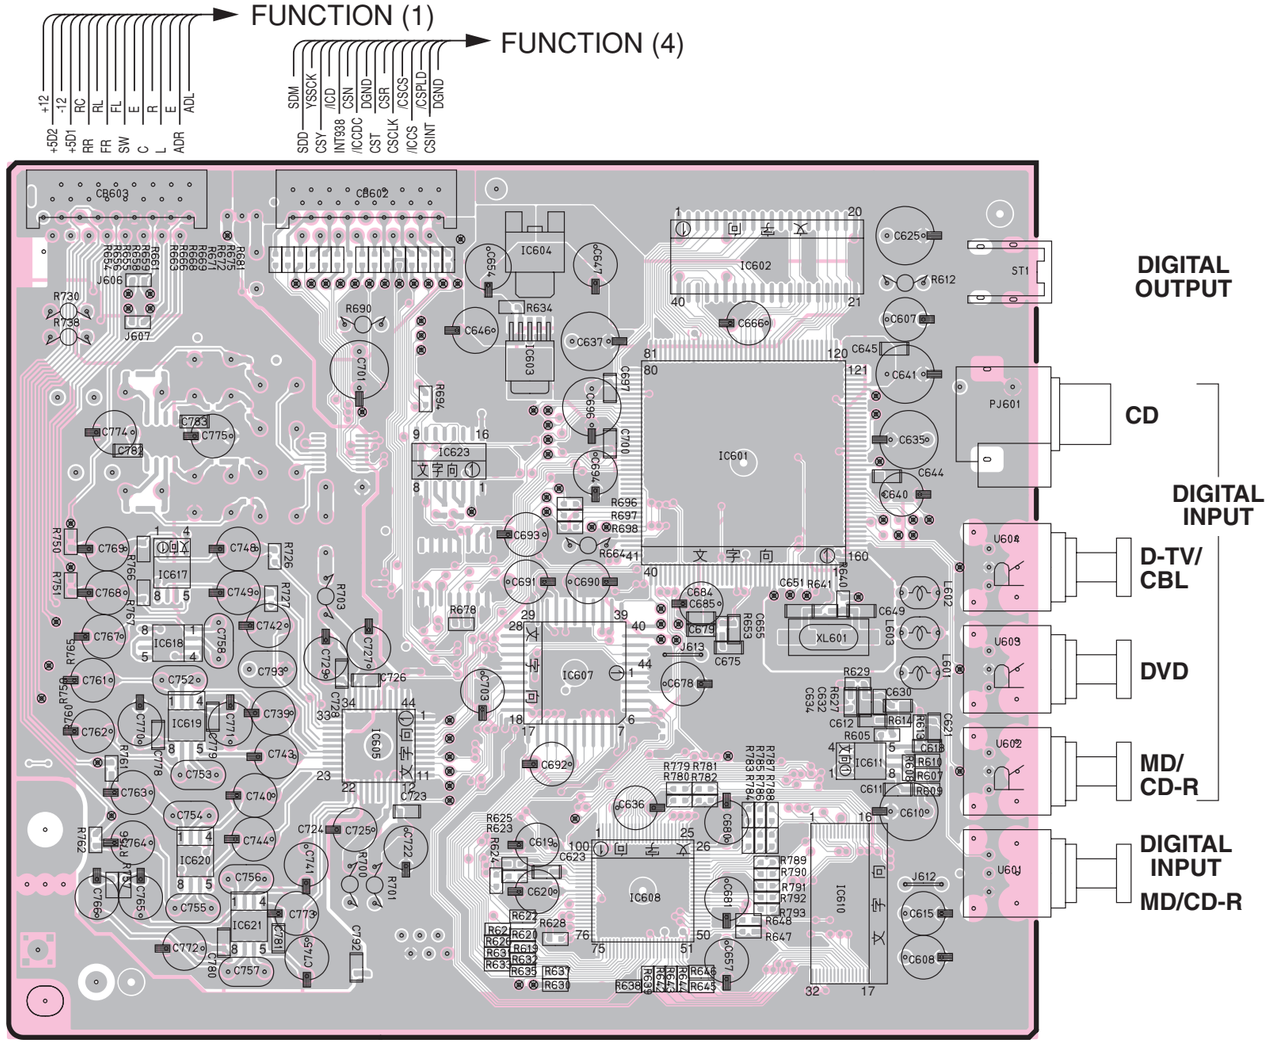

DSP P. C. B. (Surface Mount Device)

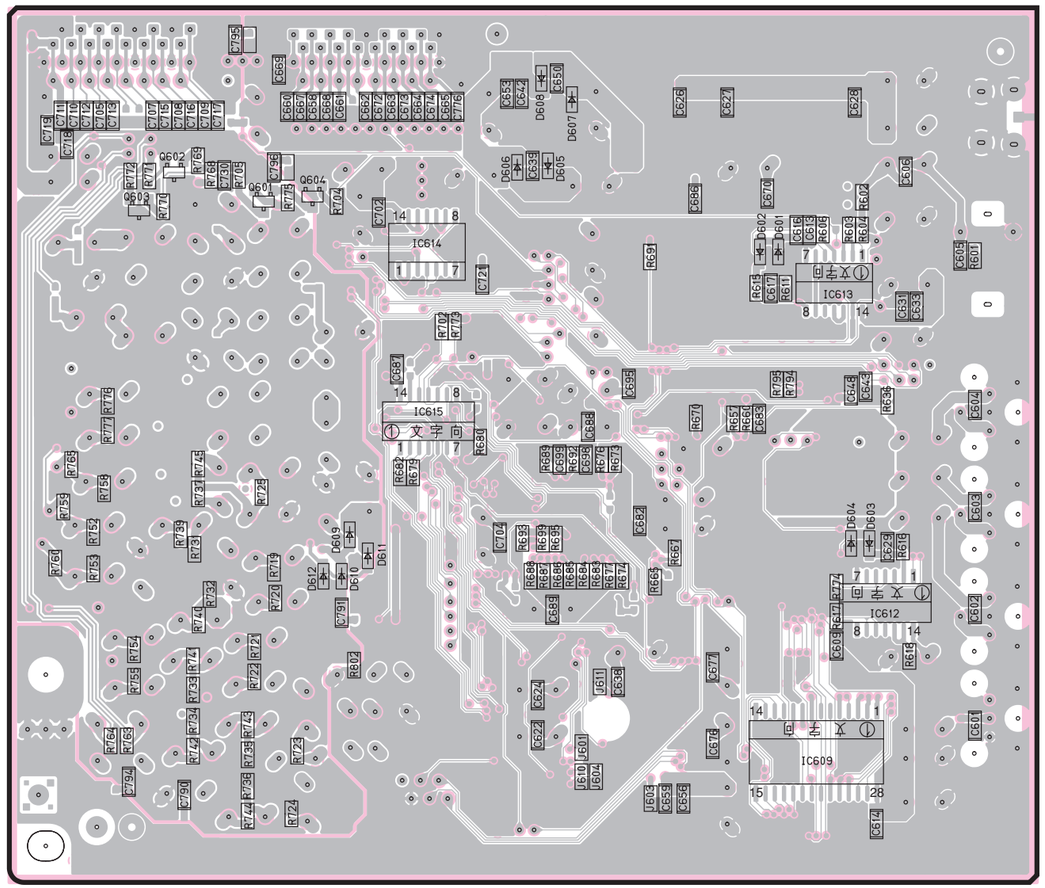

Circuit No.	J	U, C, R, T, K, A, B, G
R795	X	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D601	I3	D607	I3	IC601	D4	IC608	C5	IC614	H3	IC621	B6
D602	I3	D608	H3	IC602	D3	IC609	J6	IC615	H4	IC623	C4
D603	J5	D609	H5	IC603	C3	IC610	D5	IC617	A4	Q601	G3
D604	J5	D610	H5	IC604	C3	IC611	E5	IC618	B4	Q602	G3
D605	H3	D611	H5	IC605	B5	IC612	J5	IC619	B5	Q603	G3
D606	H3	D612	G5	IC607	C5	IC613	J4	IC620	B5	Q604	G3

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

DSP P. C. B. (Lead Type Device)

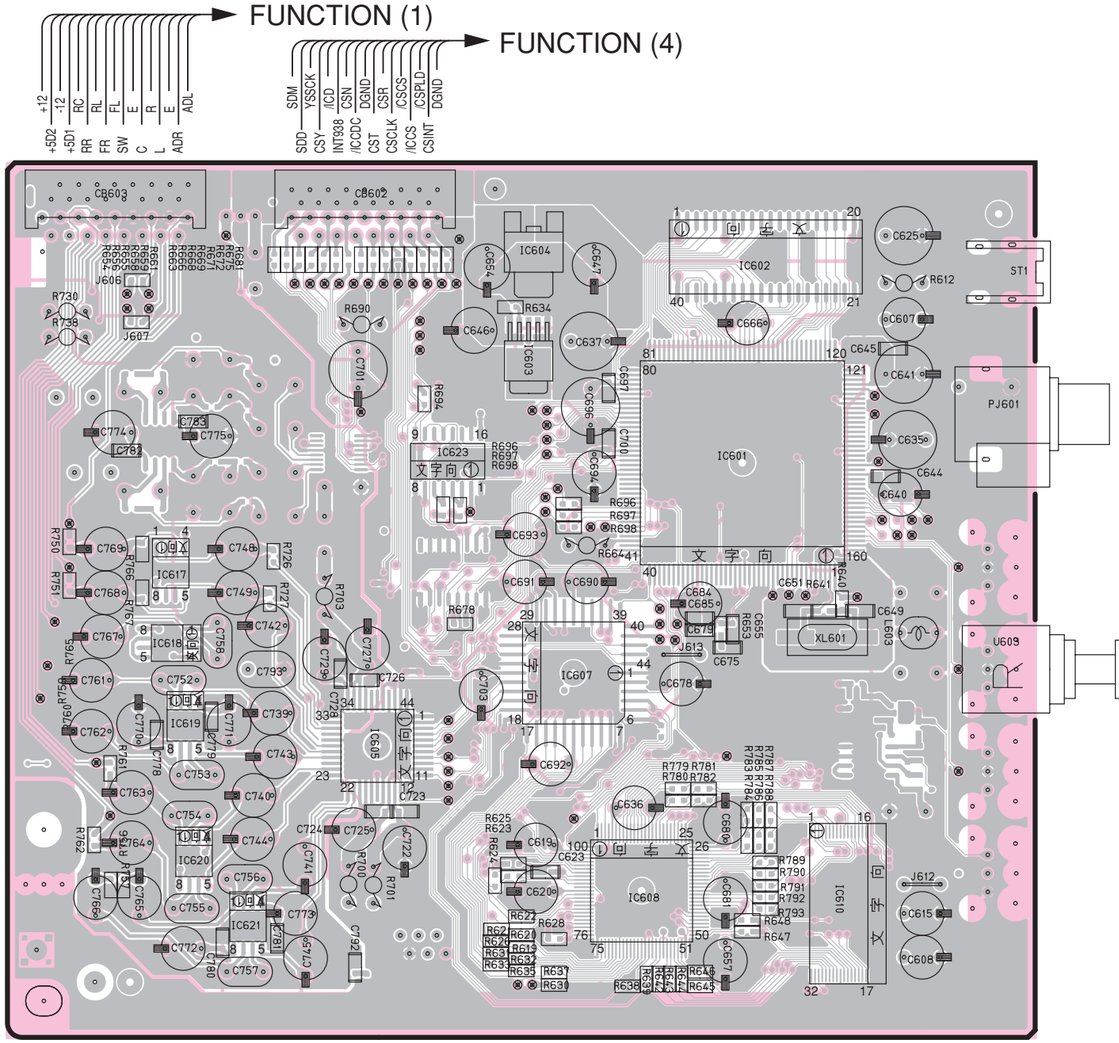

DSP P. C. B. (Surface Mount Device)

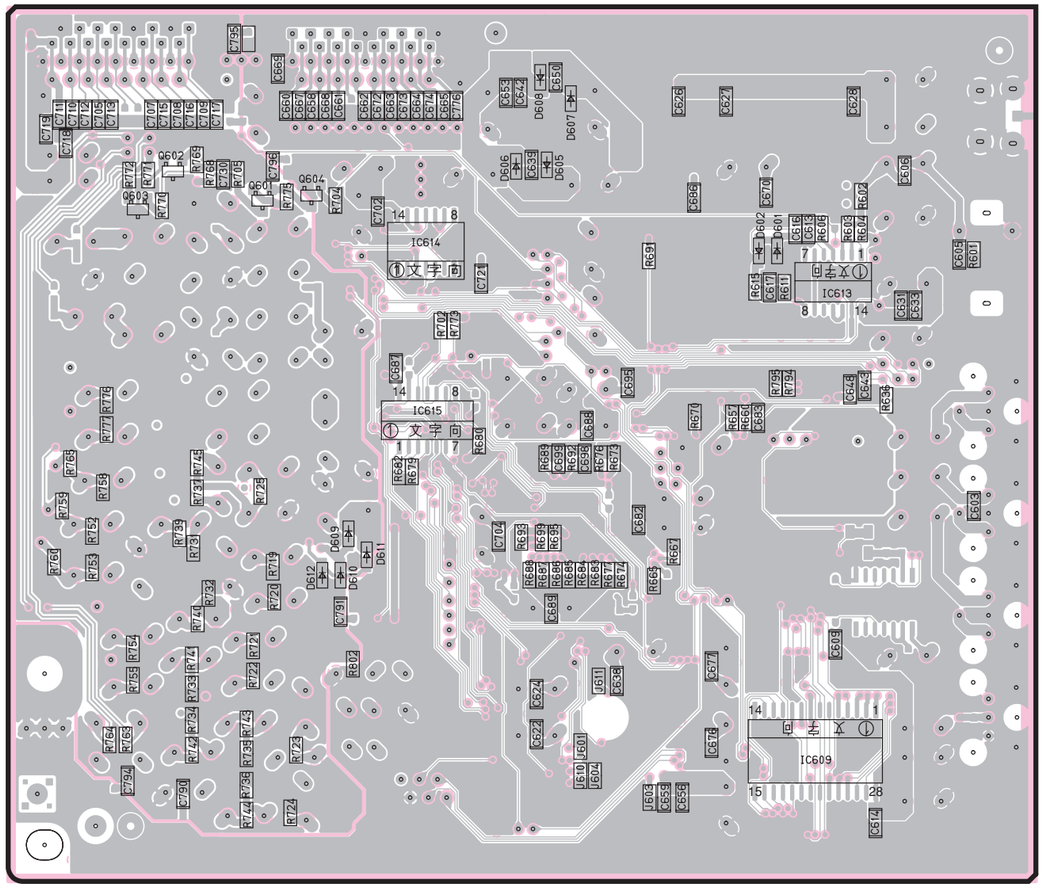

Circuit No.	J	U, C, R, T, K, A, B, G
R795	X	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D601	I3	D609	H5	IC603	C3	IC610	D5	IC619	B5	Q603	G3
D602	I3	D610	H5	IC604	C3	IC613	J4	IC620	B5	Q604	G3
D605	H3	D611	H5	IC605	B5	IC614	H3	IC621	B6		
D606	H3	D612	G5	IC607	C5	IC615	H4	IC623	C4		
D607	H3	IC601	D4	IC608	C5	IC617	A4	Q601	G3		
D608	H3	IC602	D3	IC609	J6	IC618	A4	Q602	G3		

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

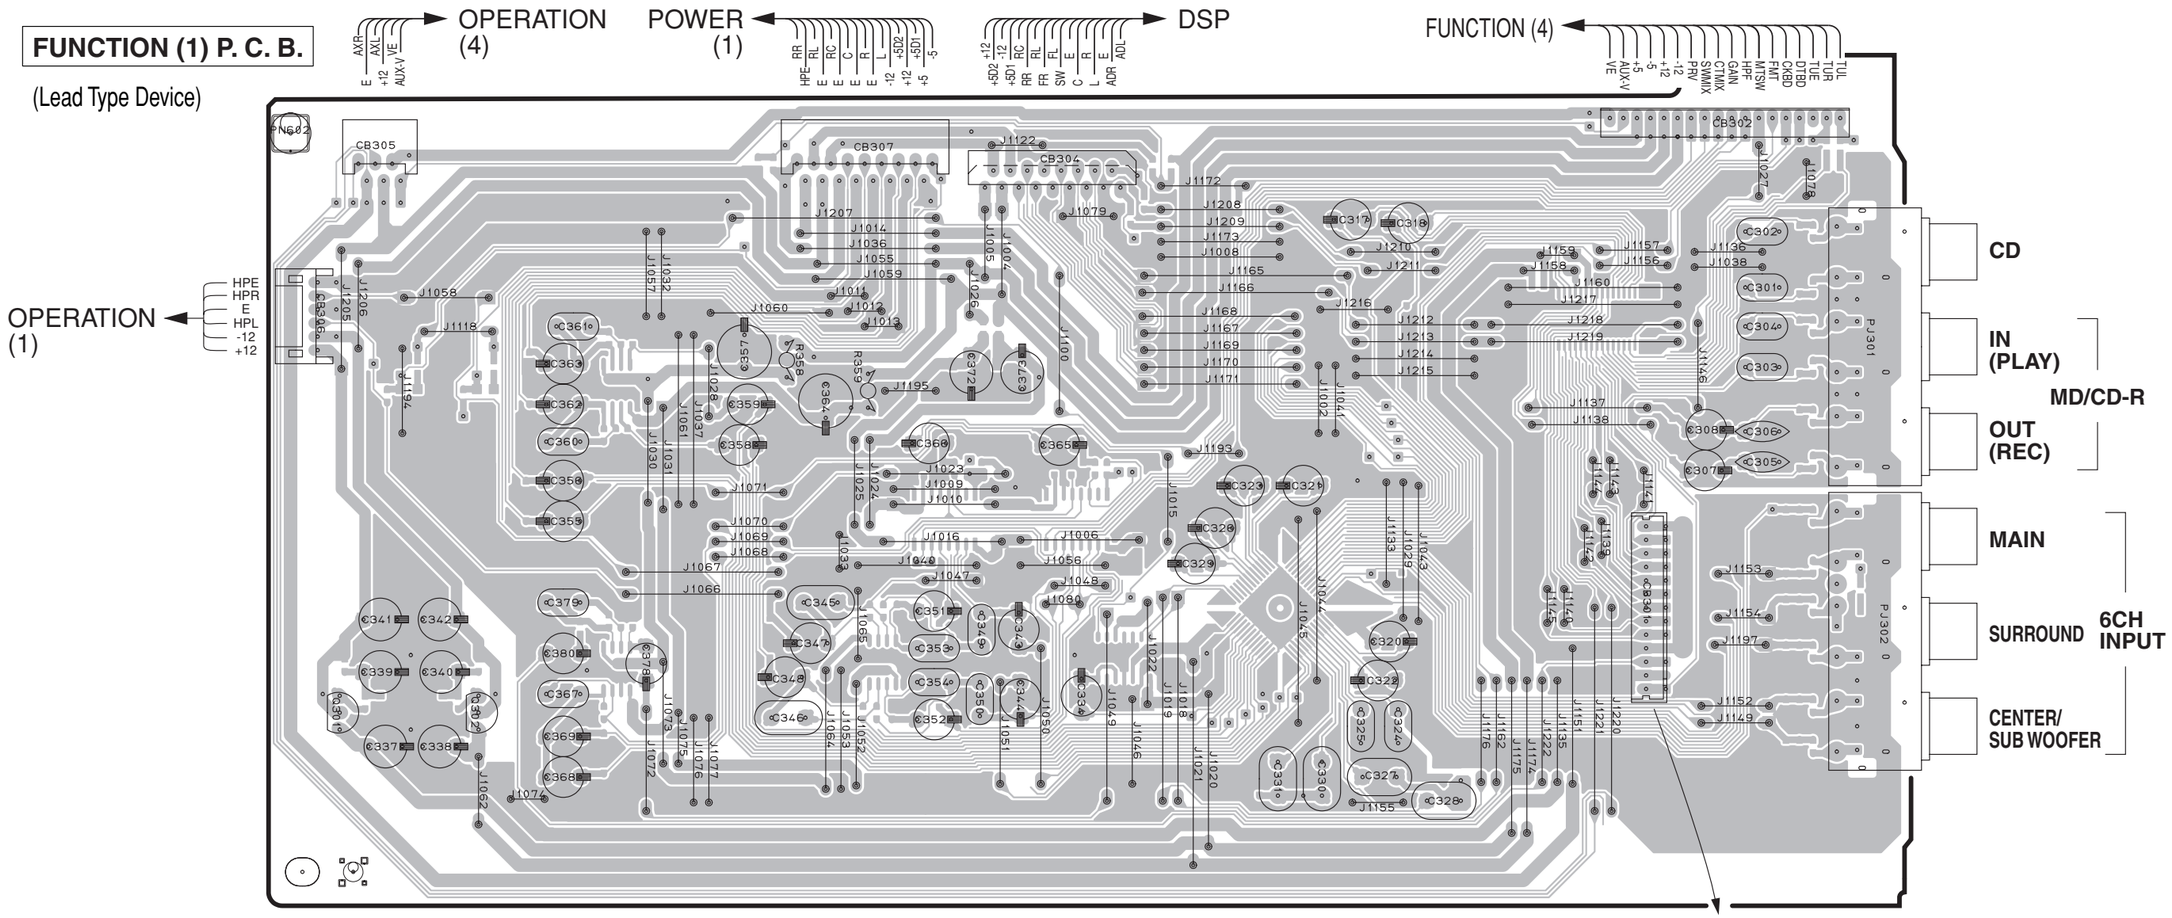

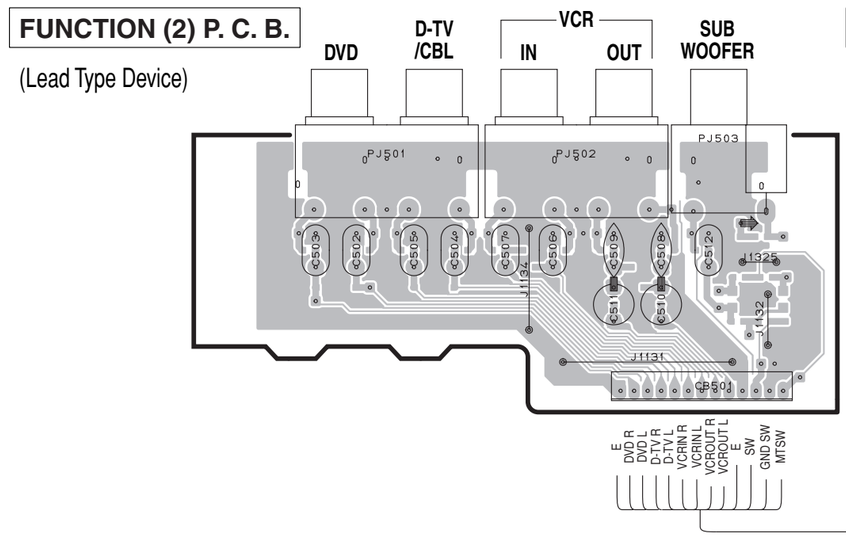

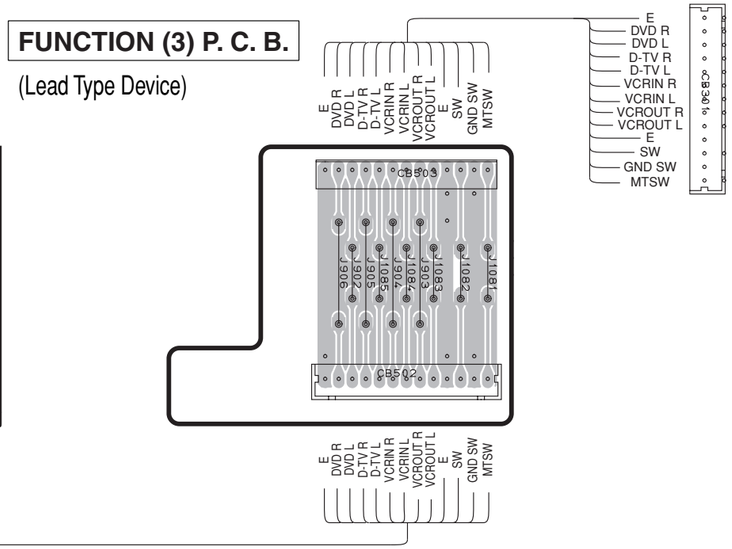

• Semiconductor Location

Ref. No.	Location
Q301	C4
Q302	C4

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

FUNCTION (1) P. C. B. (Surface Mount Device)

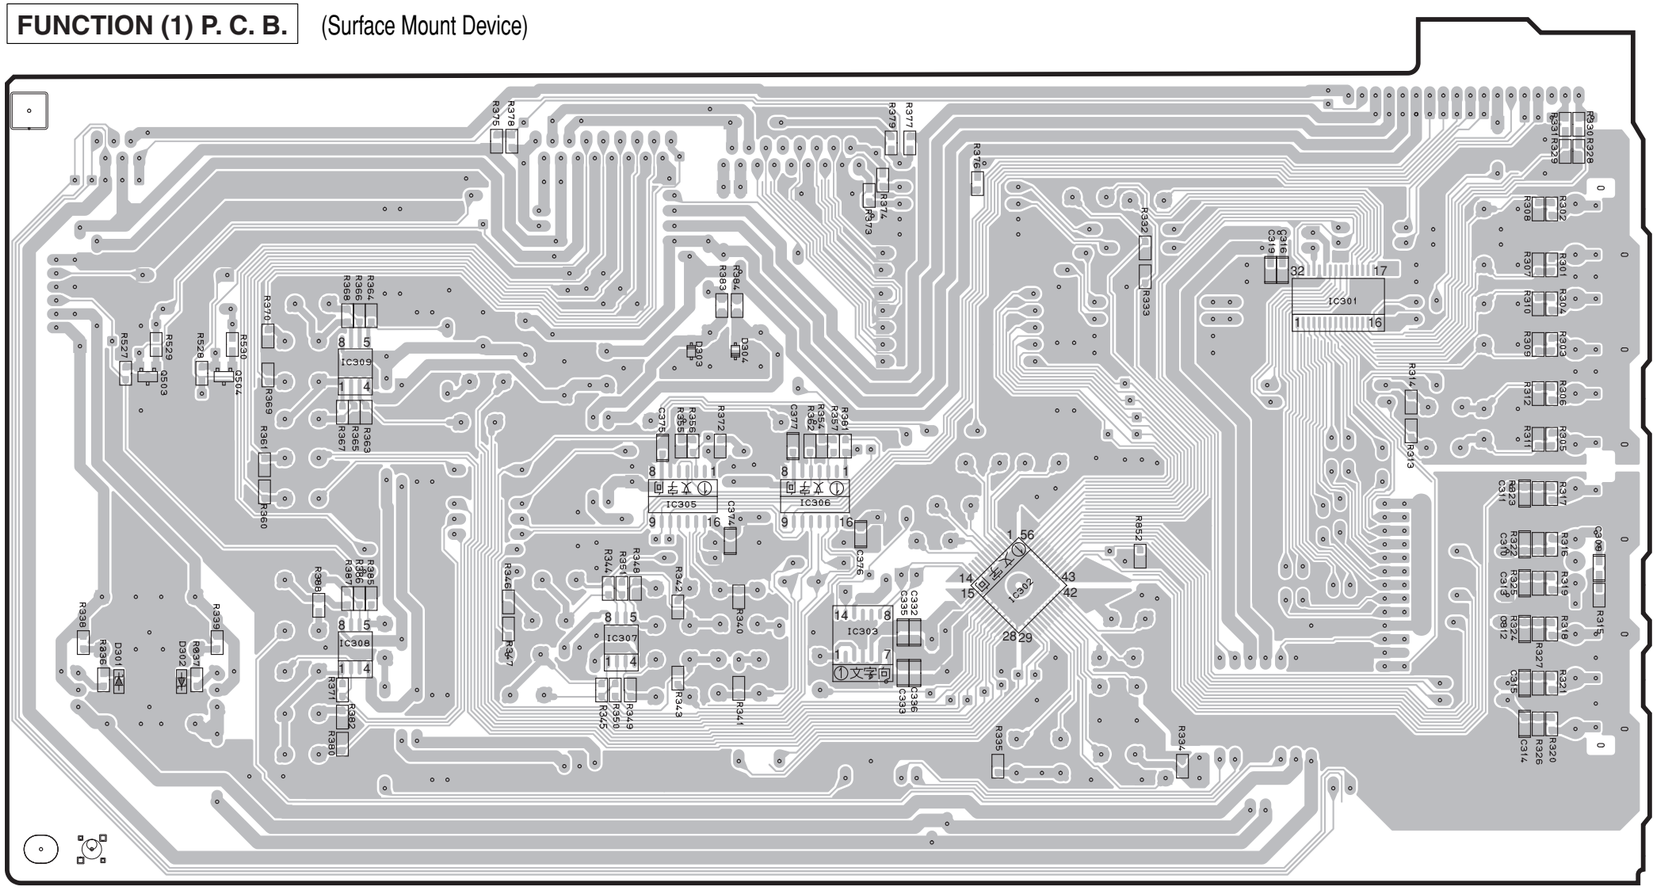

FUNCTION (2) P. C. B. (Surface Mount Device)

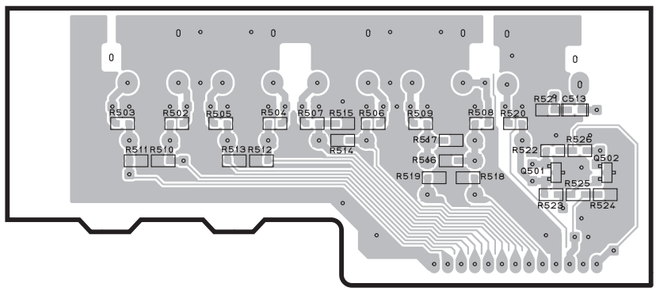

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
D301	C4	IC306	F3
D302	C4	IC307	E4
D303	F3	IC308	D4
D304	F3	IC309	D3
IC301	H3	Q501	E6
IC302	G4	Q502	F6
IC303	F4	Q503	C3
IC305	F3	Q504	D3

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

FUNCTION (4) P. C. B. (Lead Type Device)

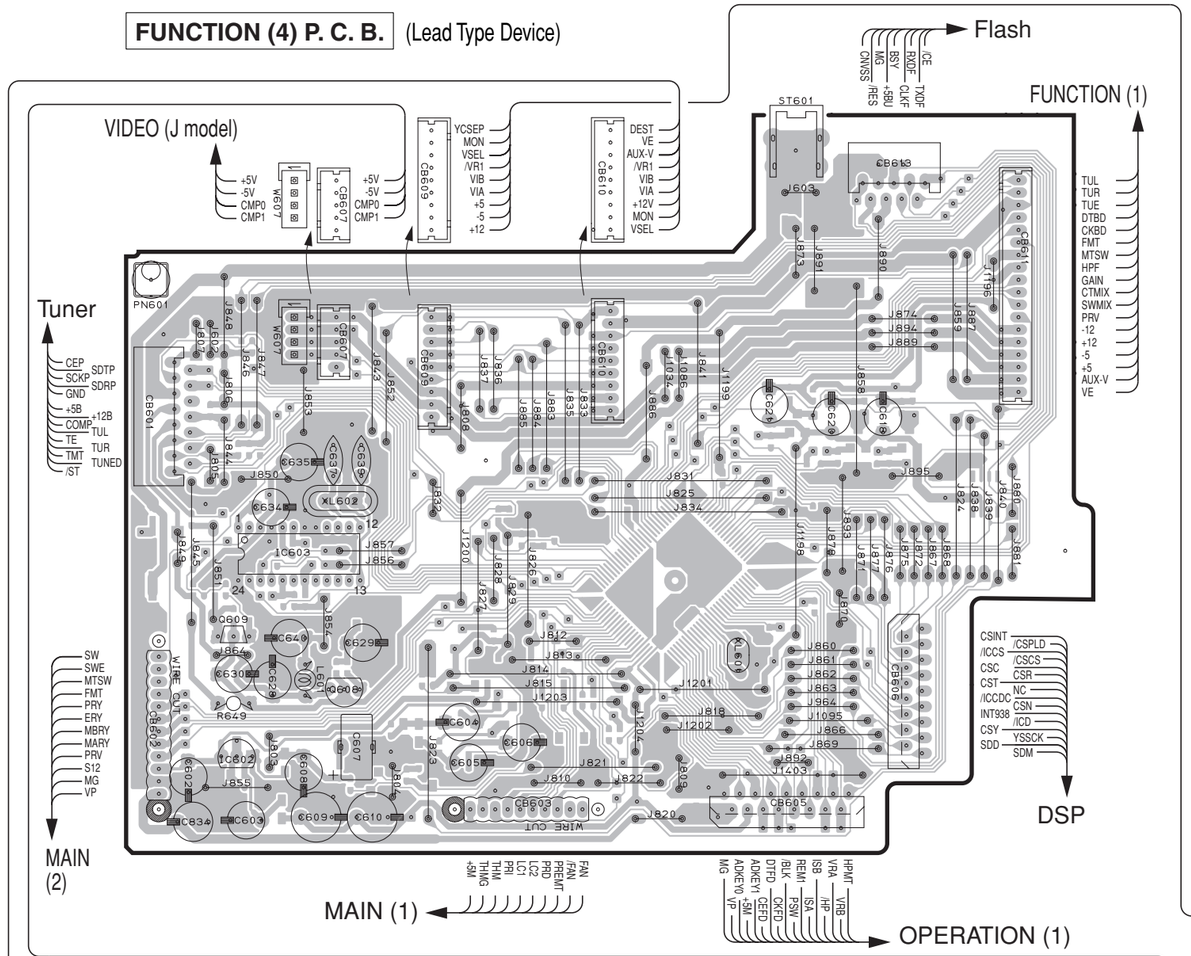

FUNCTION (5) P. C. B. (Lead Type Device)

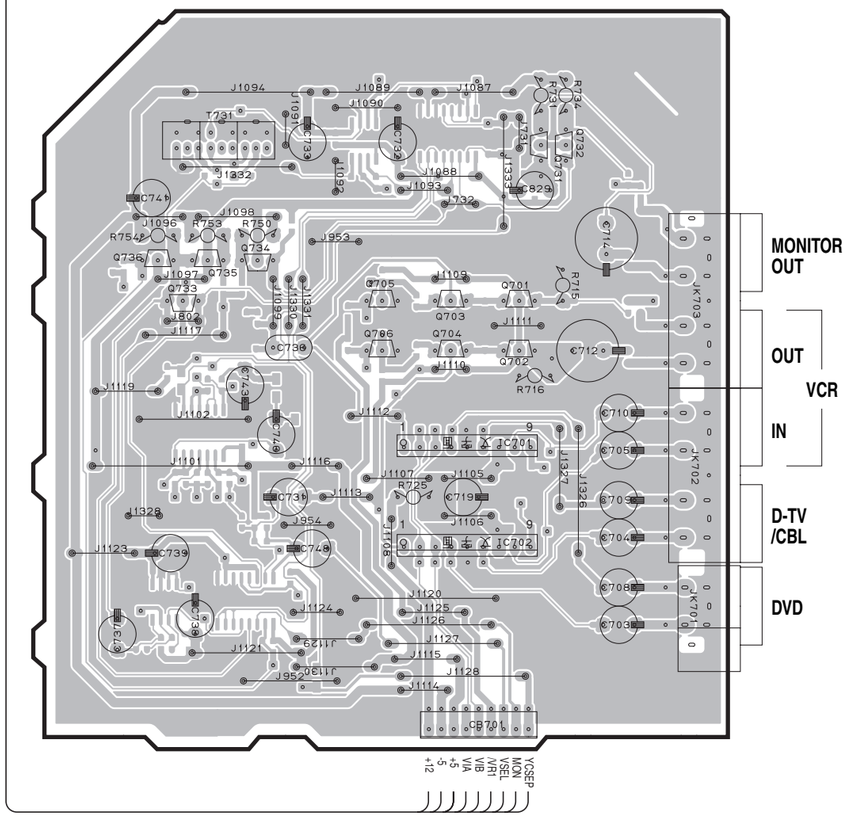

FUNCTION (6) P. C. B. (Lead Type Device)

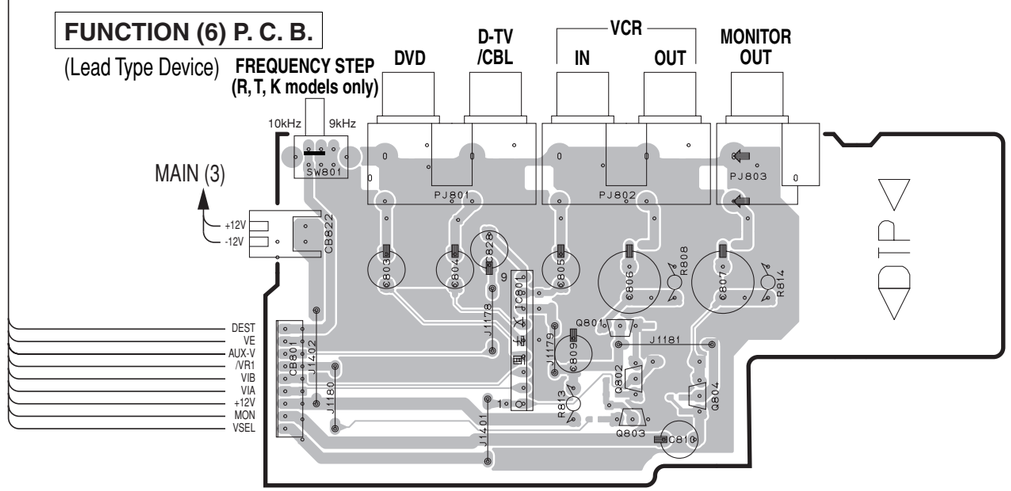

FUNCTION (7) P. C. B. (Lead Type Device) U, C, A, B, G, L, R, T, K models only

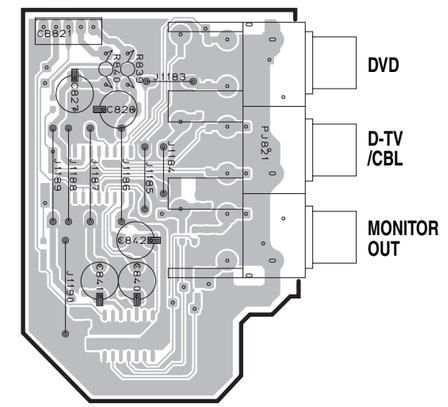

• Semiconductor Location

Ref. No.	Location
IC602	C4
IC603	C4
IC701	I3
IC702	I4
IC801	D7
Q608	C4
Q609	C4
Q701	I3
Q702	I3
Q703	I3
Q704	I3
Q705	I3
Q706	I3
Q731	I2
Q732	I2
Q733	H3
Q734	H3
Q735	H3
Q736	H3
Q801	E7
Q802	E7
Q803	E7
Q804	E7

Circuit No.	J	U, C	R, T, K	A, L	B, G
C631~640	X	X	X	X	O
CB607	X	O	O	O	O
IC603	X	X	X	X	O
IC731, 732	O	O	X	O	O
J601	O	O	O	O	X
J731, 732	X	X	O	X	X
J802	O	O	X	O	O
L601	X	X	X	X	O
Q609	X	X	X	X	O
Q733	X	X	O	X	X
R619	O	X	X	O	O
R620	X	O	O	X	X
R621	O	O	X	X	X
R622	X	X	O	O	O
R652~660, 841	X	X	X	X	O
R735, 736, 741~744, 746, 747	O	O	X	O	O
R853	X	X	O	X	X
SW801	X	X	O	X	X
T731	O	O	X	O	O
XL602	X	X	X	X	O
W607	O	X	X	X	X

X: NOT USED
O: USED / APPLICABLE

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

FUNCTION (4) P. C. B. (Surface Mount Device)

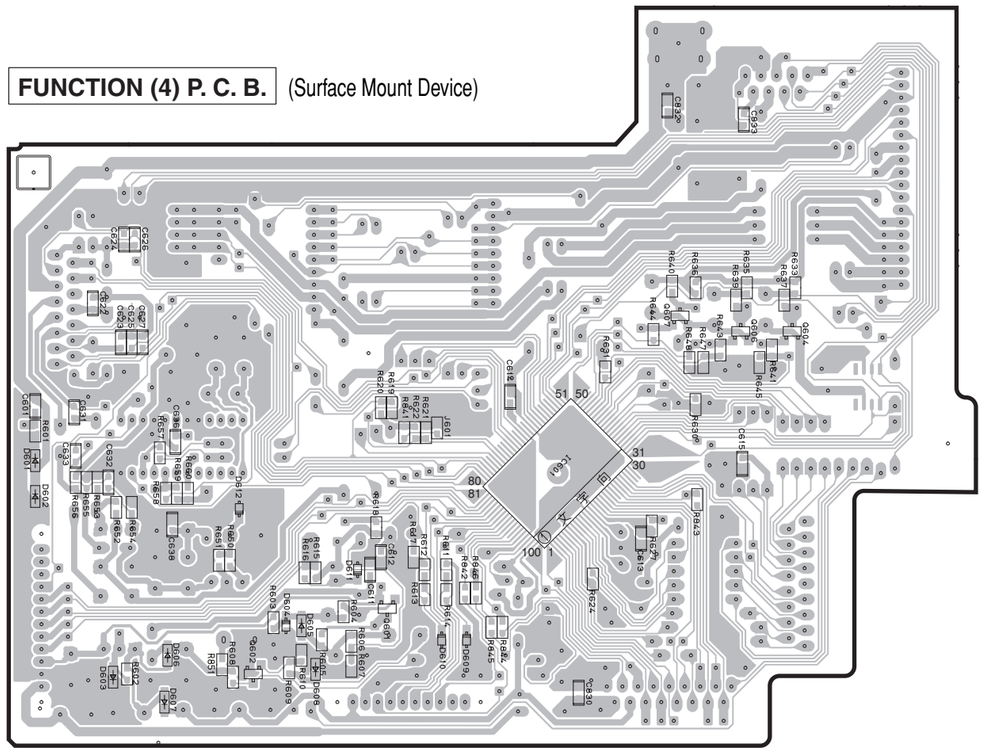

FUNCTION (5) P. C. B. (Surface Mount Device)

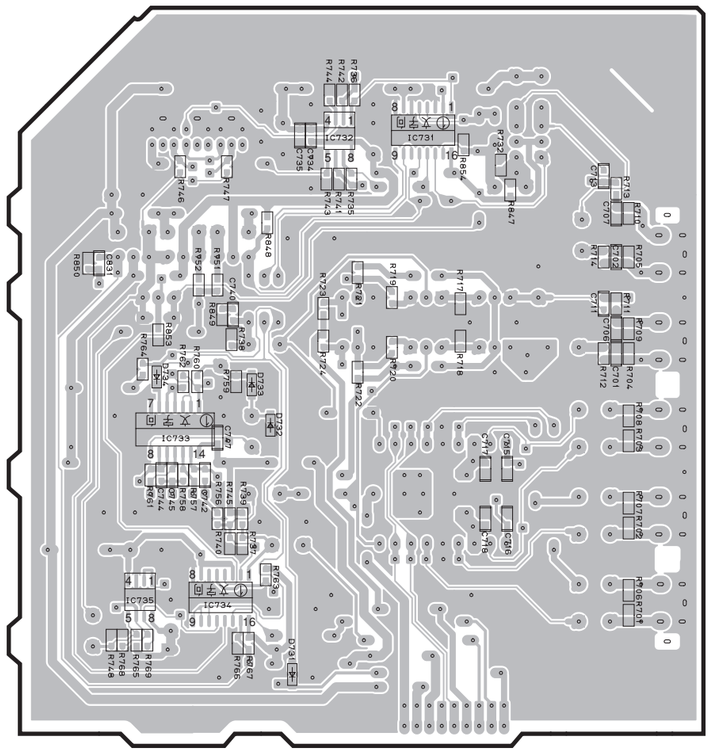

FUNCTION (6) P. C. B. (Surface Mount Device)

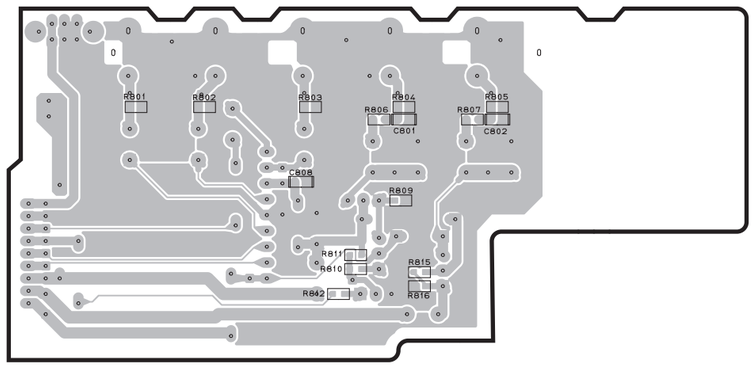

FUNCTION (7) P. C. B. (Surface Mount Device)

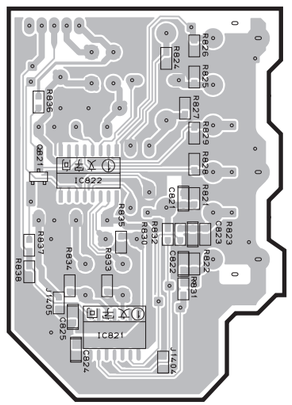

Circuit No.	J	U, C	R, T, K	A, L	B, G
C631~640	X	X	X	X	O
CB607	X	O	O	O	O
IC603	X	X	X	X	O
IC731, 732	O	O	X	O	O
J601	O	O	O	O	X
J731, 732	X	X	O	X	X
J802	O	O	X	O	O
L601	X	X	X	X	O
Q609	X	X	X	X	O
Q733	X	X	O	X	X
R619	O	X	X	O	O
R620	X	O	O	X	X
R621	O	O	X	X	X
R622	X	X	O	O	O
R652~660, 841	X	X	X	X	O
R735, 736, 741~744, 746, 747	O	O	X	O	O
R853	X	X	O	X	X
SW801	X	X	O	X	X
T731	O	O	X	O	O
XL602	X	X	X	X	O
W607	O	X	X	X	X

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location
D601	B4
D602	B4
D603	B4
D604	C4
D605	C4
D606	B4
D607	B5
D608	C4
D609	D4
D610	D4
D611	C4
D612	C4
D731	G4
D732	G3
D733	G3
D734	G3
IC601	D4
IC731	H2
IC732	G2
IC733	G3
IC734	G4
IC735	G4
IC821	G6
IC822	G6
Q601	C4
Q602	C5
Q604	E3
Q606	E3
Q607	E3
Q821	F6

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

FUNCTION (1) P. C. B.

(Lead Type Device)

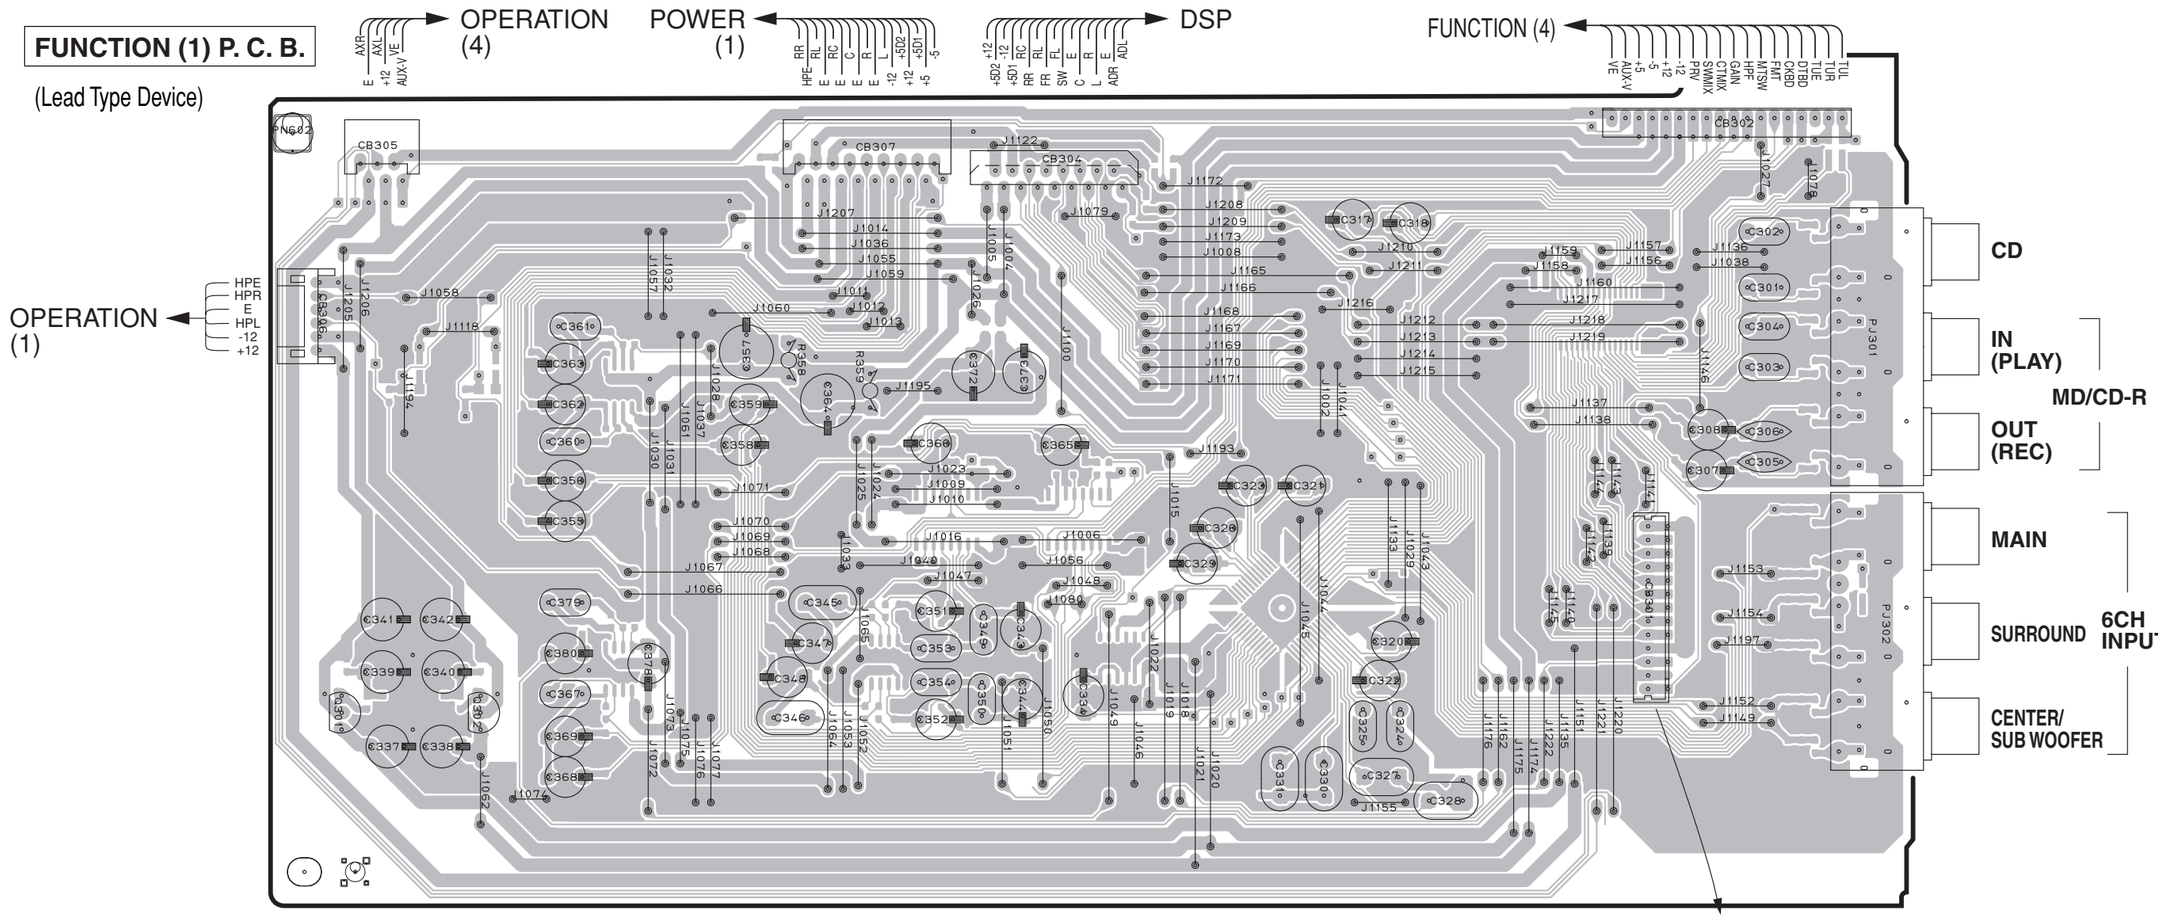

FUNCTION (2) P. C. B.

(Lead Type Device)

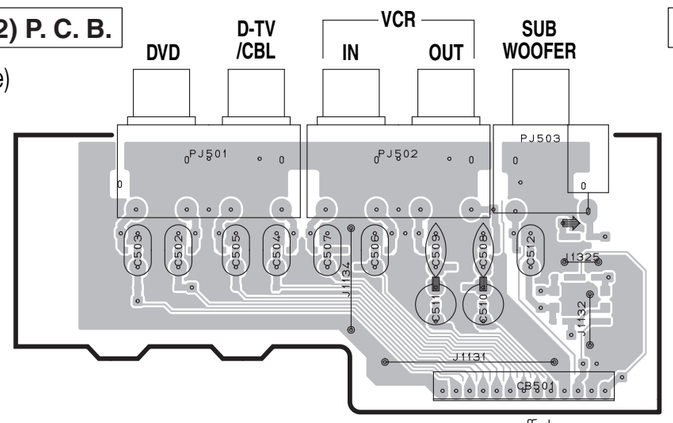

FUNCTION (3) P. C. B.

(Lead Type Device)

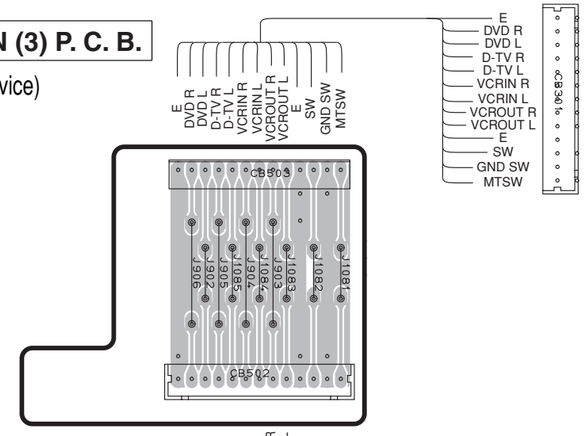

• Semiconductor Location

Ref. No.	Location
Q301	C4
Q302	C4

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

FUNCTION (1) P. C. B. (Surface Mount Device)

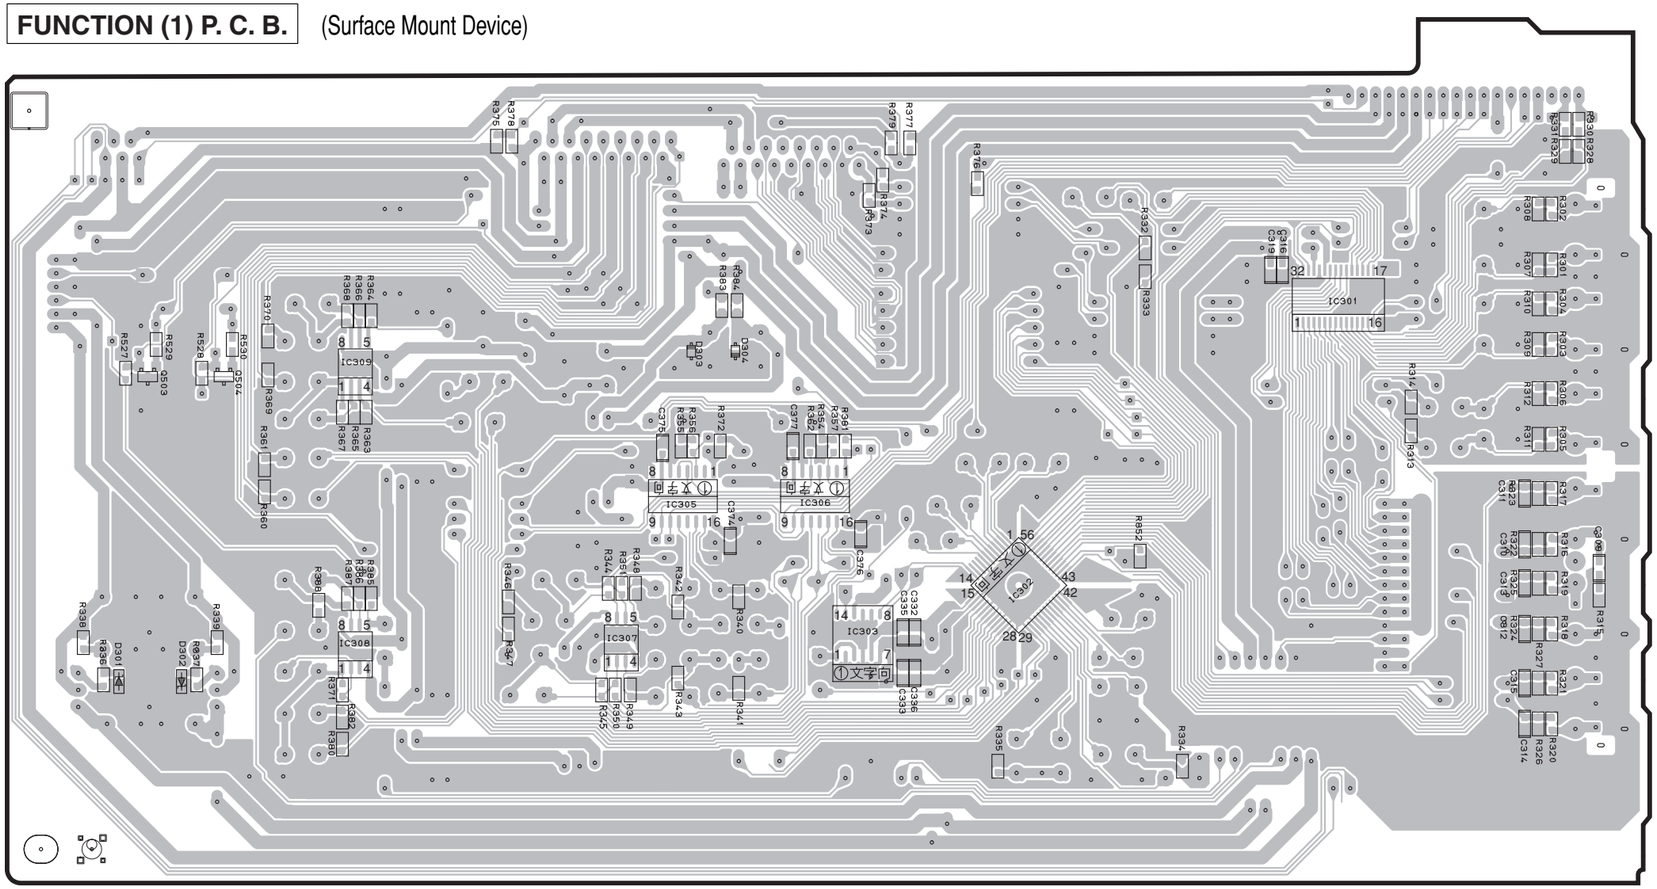

FUNCTION (2) P. C. B. (Surface Mount Device)

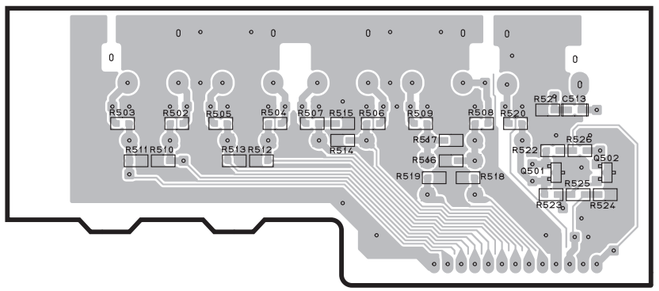

• **Semiconductor Location**

Ref. No.	Location	Ref. No.	Location
D301	C4	IC306	F3
D302	D4	IC307	E4
D303	F3	IC308	D4
D304	F3	IC309	D3
IC301	H3	Q501	F6
IC302	G4	Q502	F6
IC303	F4	Q503	C3
IC305	F3	Q504	D3

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

FUNCTION (4) P. C. B. (Lead Type Device)

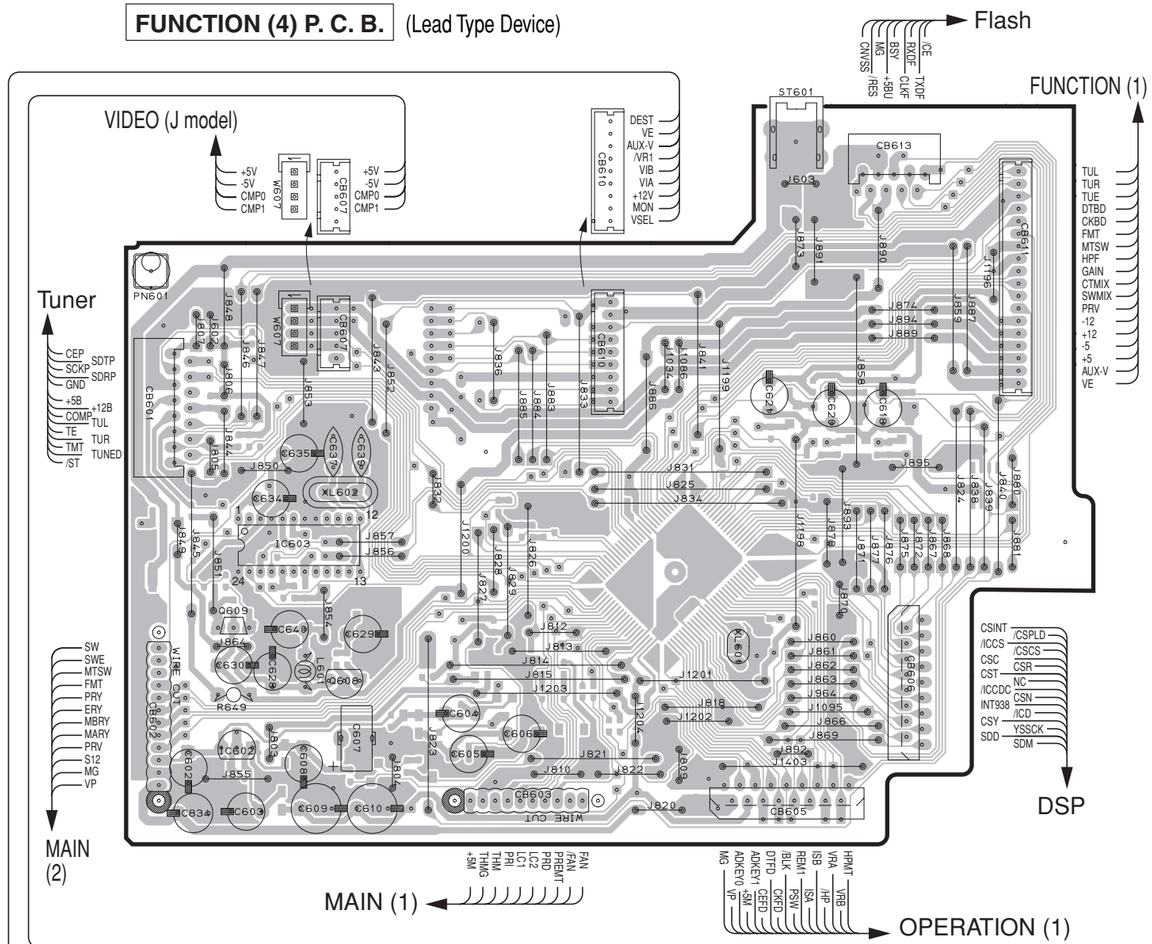

FUNCTION (6) P. C. B.

(Lead Type Device) **FREQUENCY STEP (R, T, K models only)**

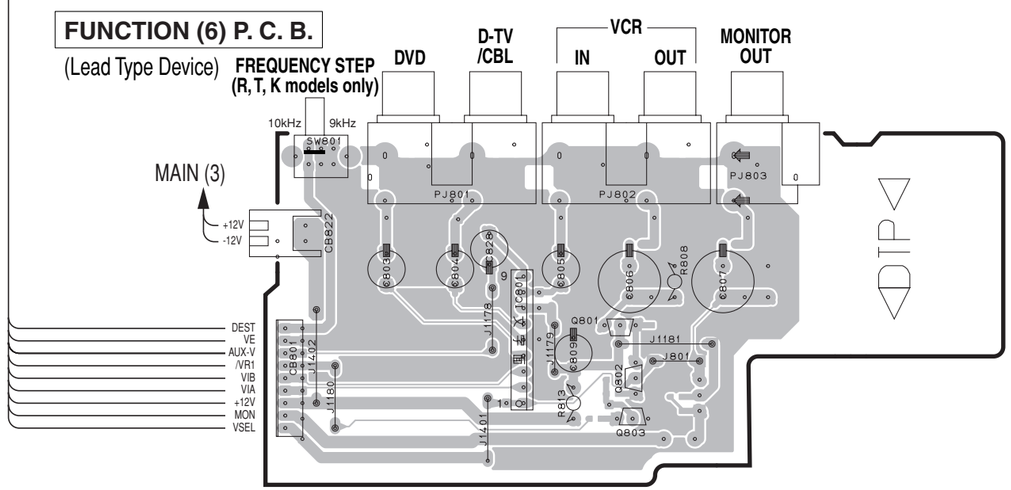

FUNCTION (7) P. C. B. (Lead Type Device)

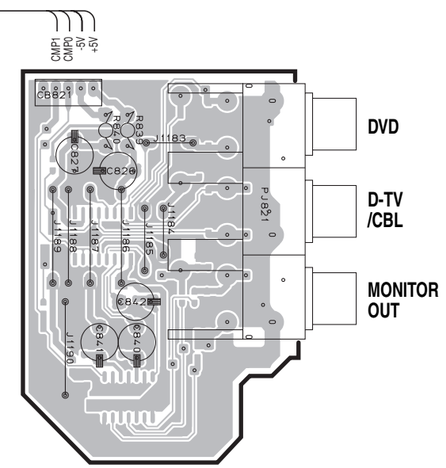

• Semiconductor Location

Ref. No.	Location
IC602	C4
IC603	C4
IC801	D7
Q608	C4
Q609	C4
Q801	E7
Q802	E7
Q803	E7

Circuit No.	J	U, C	R, T, K	A, L	B, G
C631~640	X	X	X	X	O
CB607	X	O	O	O	O
IC603	X	X	X	X	O
J601	O	O	O	O	X
J802	O	O	X	O	O
L601	X	X	X	X	O
Q609	X	X	X	X	O
R619	O	X	X	O	O
R620	X	O	O	X	X
R621	O	O	X	X	X
R622	X	X	O	O	O
R652~660, 841	X	X	X	X	O
SW801	X	X	O	X	X
W607	O	X	X	X	X
XL602	X	X	X	X	O

X: NOT USED
O: USED / APPLICABLE

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

FUNCTION (4) P. C. B. (Surface Mount Device)

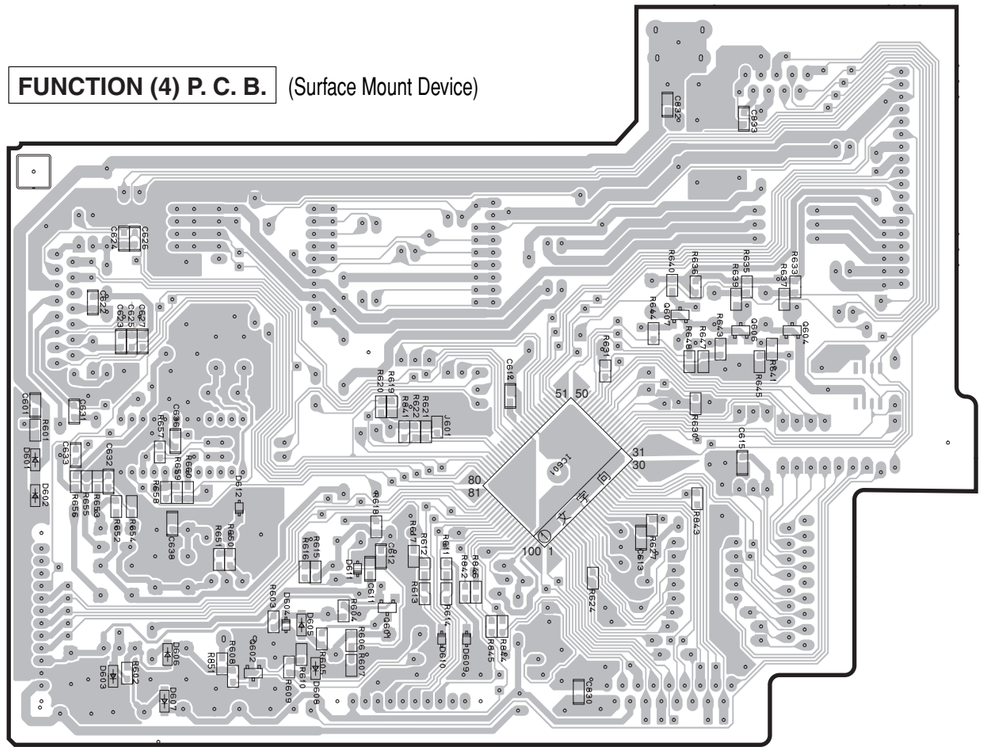

FUNCTION (6) P. C. B. (Surface Mount Device)

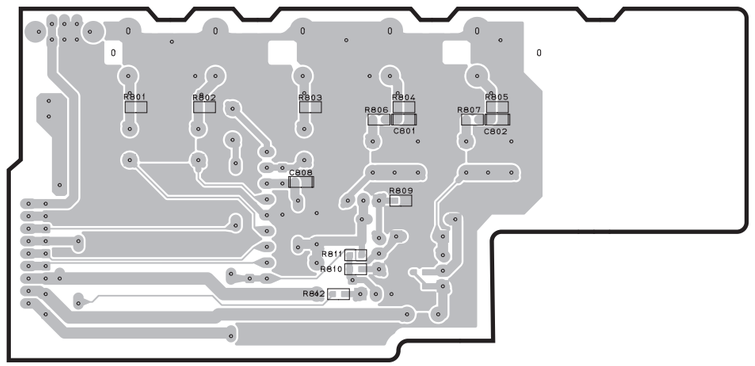

FUNCTION (7) P. C. B. (Surface Mount Device)

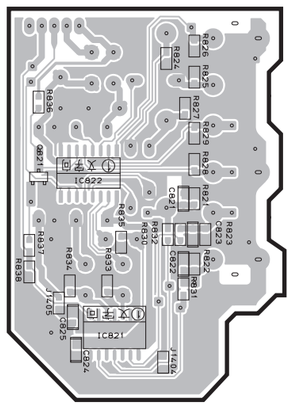

Circuit No.	J	U, C	R, T, K	A, L	B, G
C631-640	X	X	X	X	O
CB607	X	O	O	O	O
IC603	X	X	X	X	O
J601	O	O	O	O	X
J802	O	O	X	O	O
L601	X	X	X	X	O
Q609	X	X	X	X	O
R619	O	X	X	O	O
R620	X	O	O	X	X
R621	O	O	X	X	X
R622	X	X	O	O	O
R652-660, 841	X	X	X	X	O
SW801	X	X	O	X	X
W607	O	X	X	X	X
XL602	X	X	X	X	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location
D601	B3
D602	B4
D603	B4
D604	C4
D605	C4
D606	B4
D607	B4
D608	C4
D609	D4
D610	D4
D611	C4
D612	C4
IC601	D3
IC821	G6
IC822	G6
Q601	C4
Q602	C4
Q604	E3
Q606	E3
Q607	E3
Q821	F6

■ PRINTED CIRCUIT BOARD (Foil side)

OPERATION (1) P. C. B. (Lead Type Device)

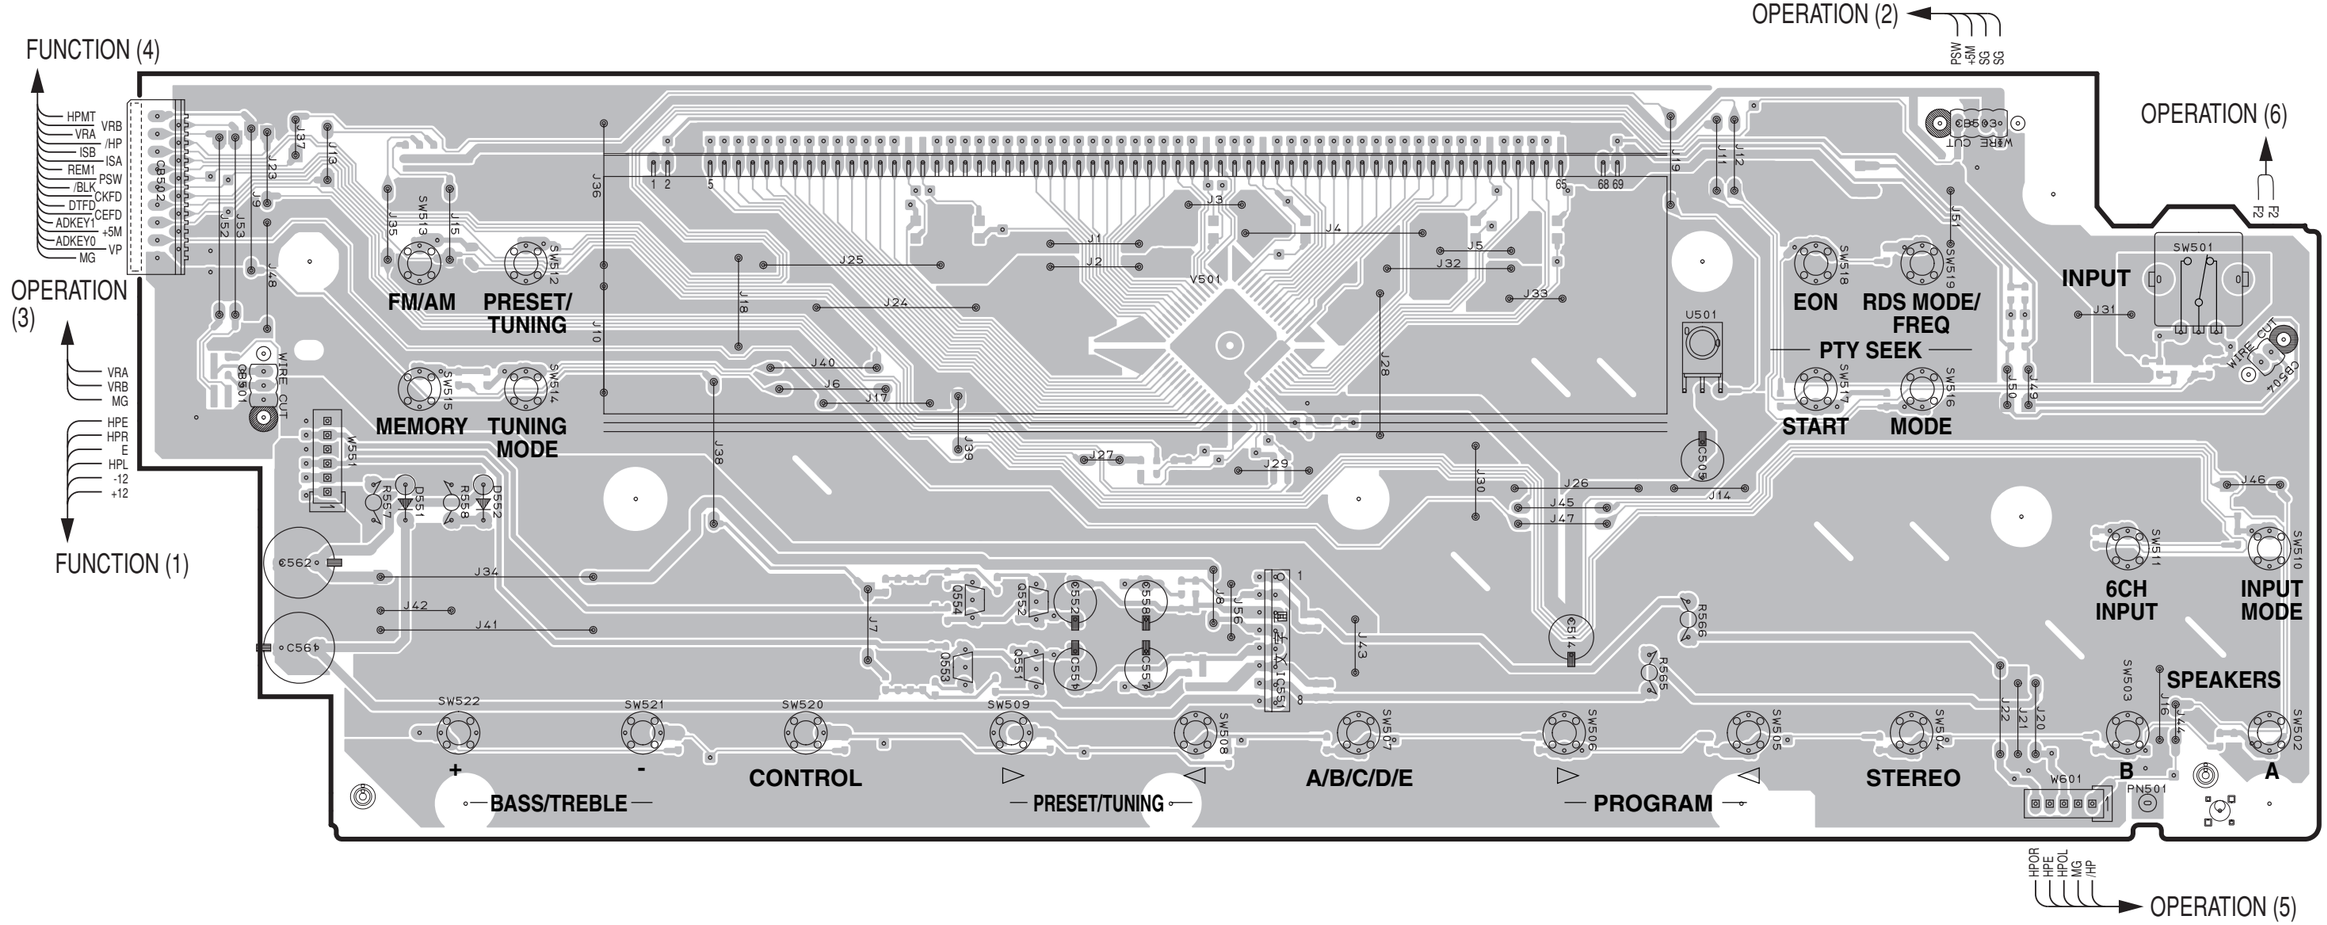

Circuit No.	J, U, C, R, T, K, A, L	B,G
R524~527	X	O
SW516~519	X	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location
D551	B4
D552	C4
IC551	F4
Q551	E4
Q552	E4

■ PRINTED CIRCUIT BOARD (Foil side)

OPERATION (1) P. C. B. (Surface Mount Device)

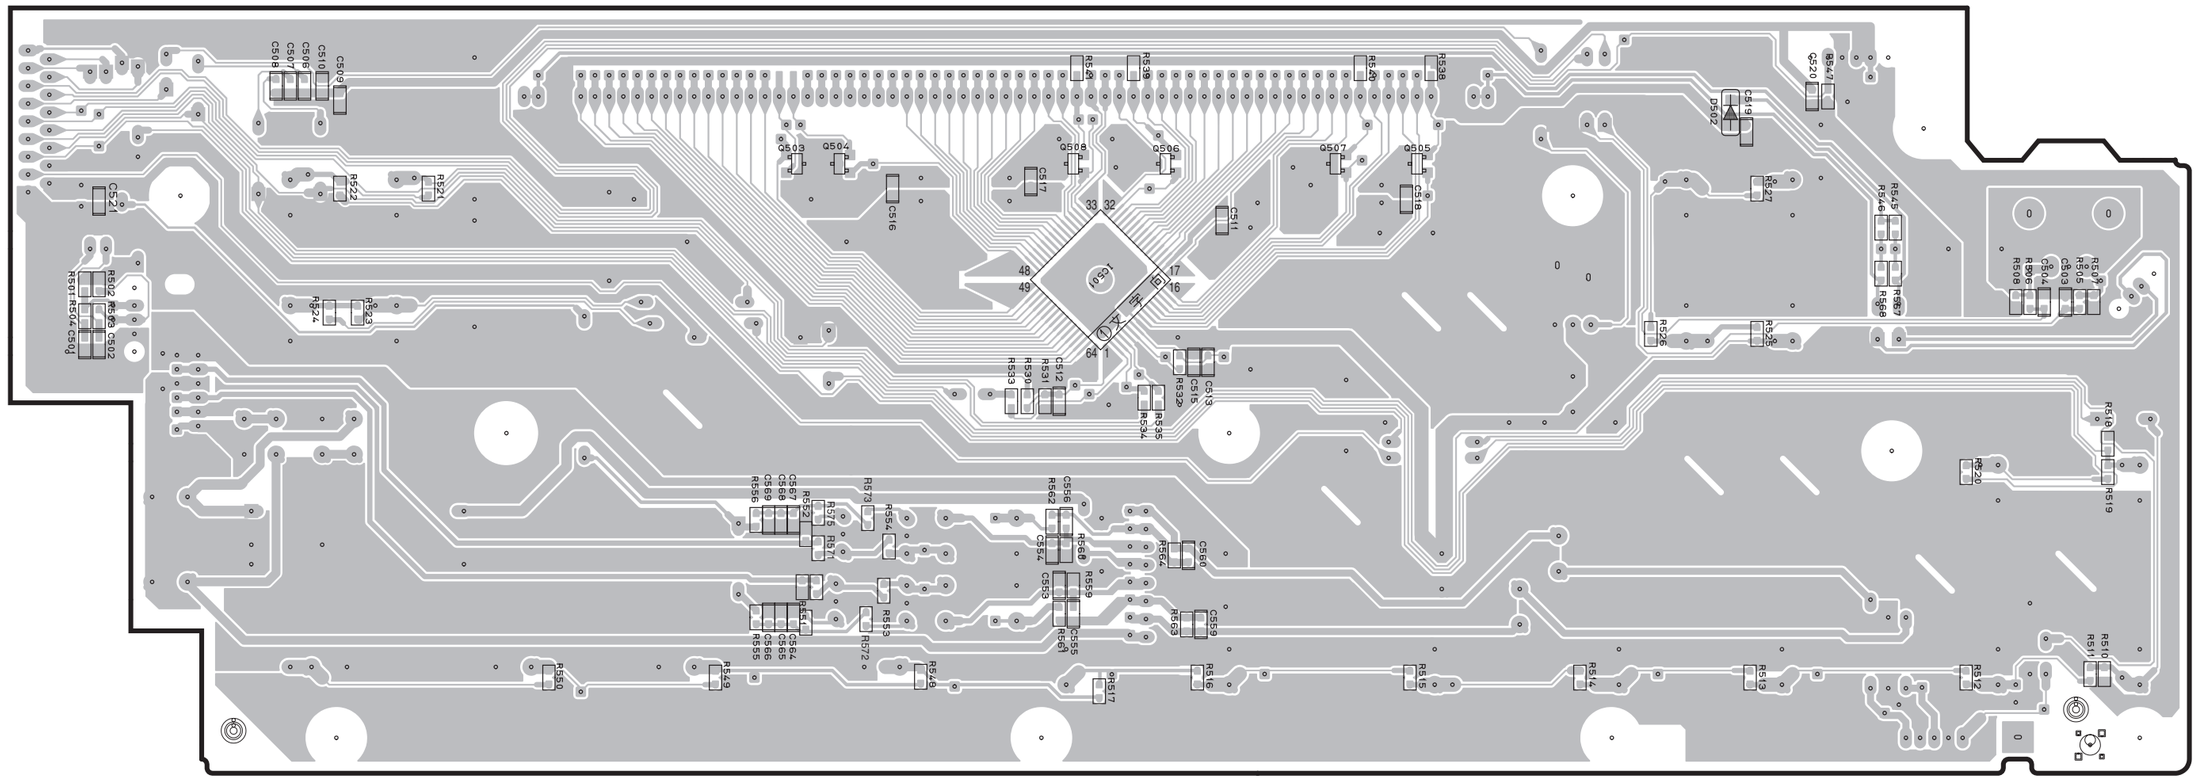

Circuit No.	J, U, C, R, T, K, A, L	B,G
R524~527	X	O
SW516~519	X	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location
D502	H2
IC501	F3
Q503	E2
Q504	E2
Q505	G2
Q506	F2
Q507	G2
Q508	F2

■ PRINTED CIRCUIT BOARD (Foil side)

OPERATION (2) P. C. B.
(Lead Type Device)

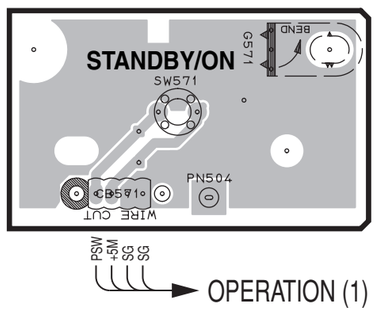

OPERATION (3) P. C. B.
(Lead Type Device)

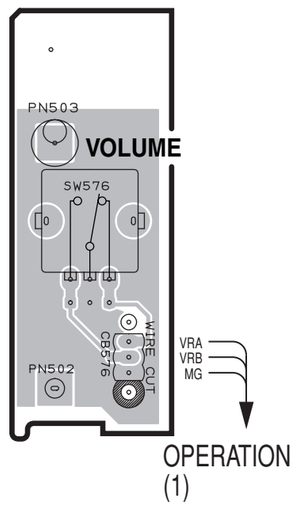

OPERATION (4) P. C. B.
(Lead Type Device)

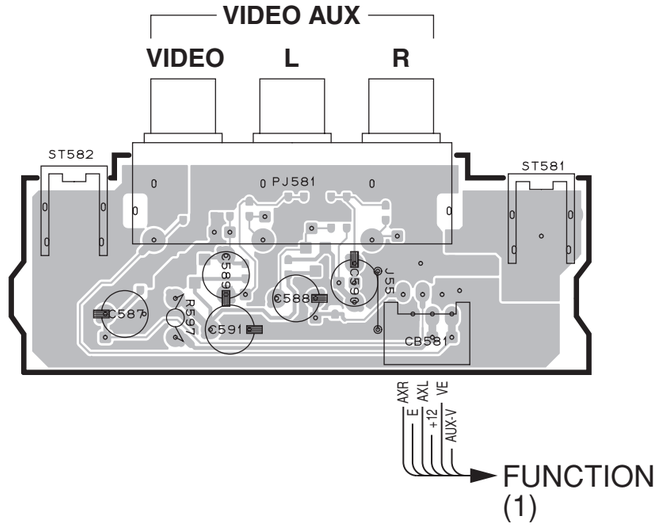

OPERATION (5) P. C. B.
(Lead Type Device)

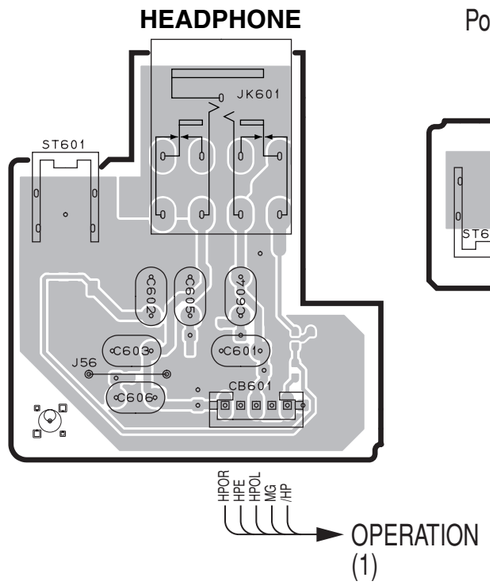

OPERATION (6) P. C. B.
(Lead Type Device)

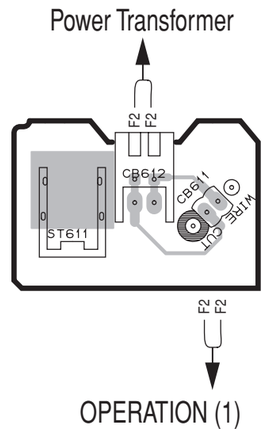

OPERATION (4) P. C. B. (Surface Mount Device)

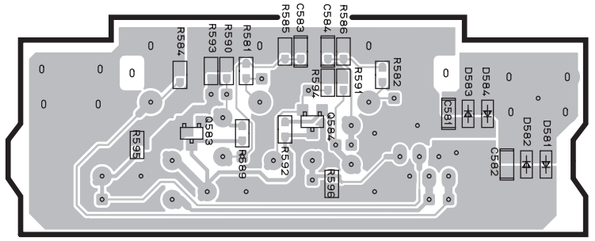

OPERATION (5) P. C. B.
(Surface Mount Device)

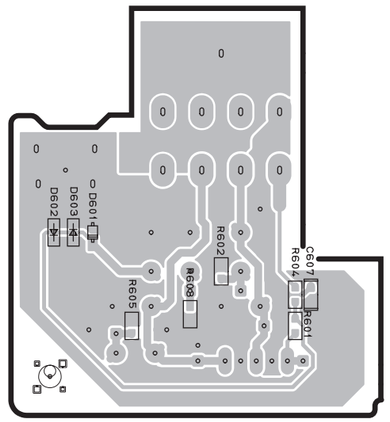

Circuit No.	J, U, C, R, T, K, A, L	B,G
R524~527	X	O
SW516~519	X	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location
D581	G5
D582	G5
D583	F5
D584	F5
D601	H6
D602	G6
D603	G6
Q583	E5
Q584	F5

■ PRINTED CIRCUIT BOARD (Foil side)

VIDEO P. C. B. (Lead Type Device)

J model

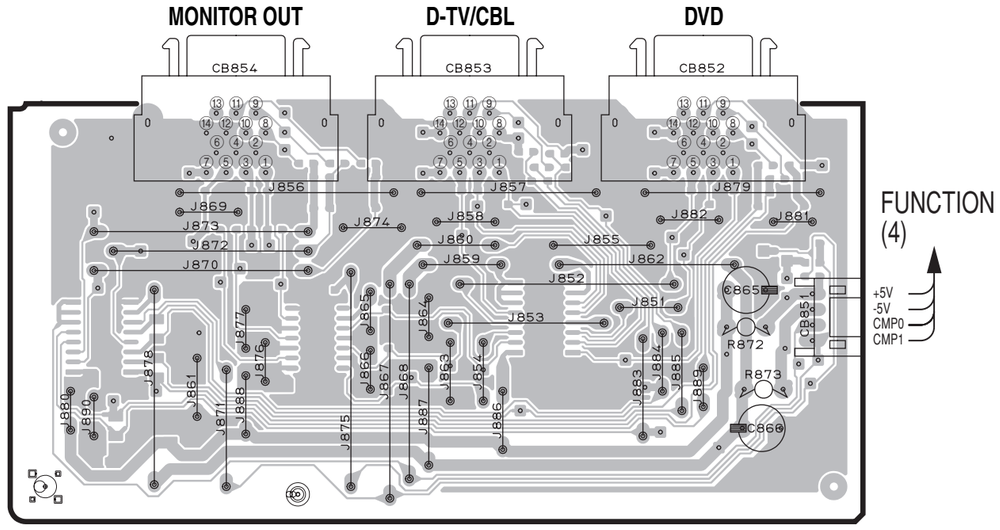

VIDEO P. C. B. (Surface Mount Device)

J model

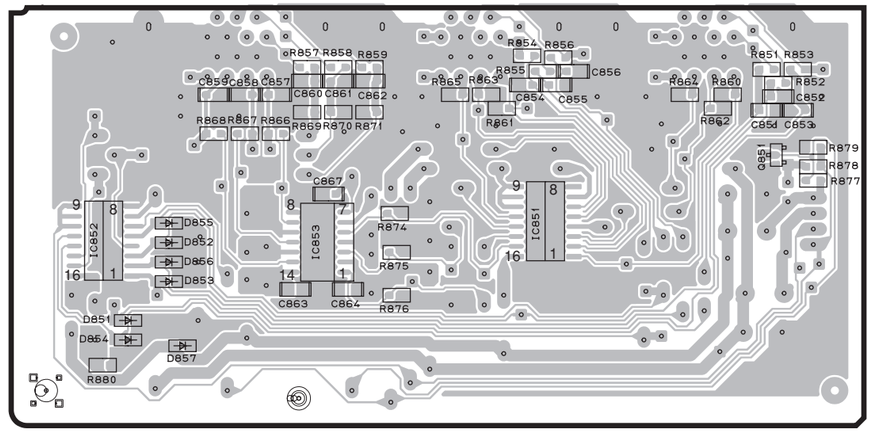

• Semiconductor Location

Ref. No.	Location
D851	F3
D852	G3
D853	G3
D854	G3
D855	G3
D856	G3
D857	G3
IC851	H3
IC852	F3
IC853	G3
Q851	I3

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

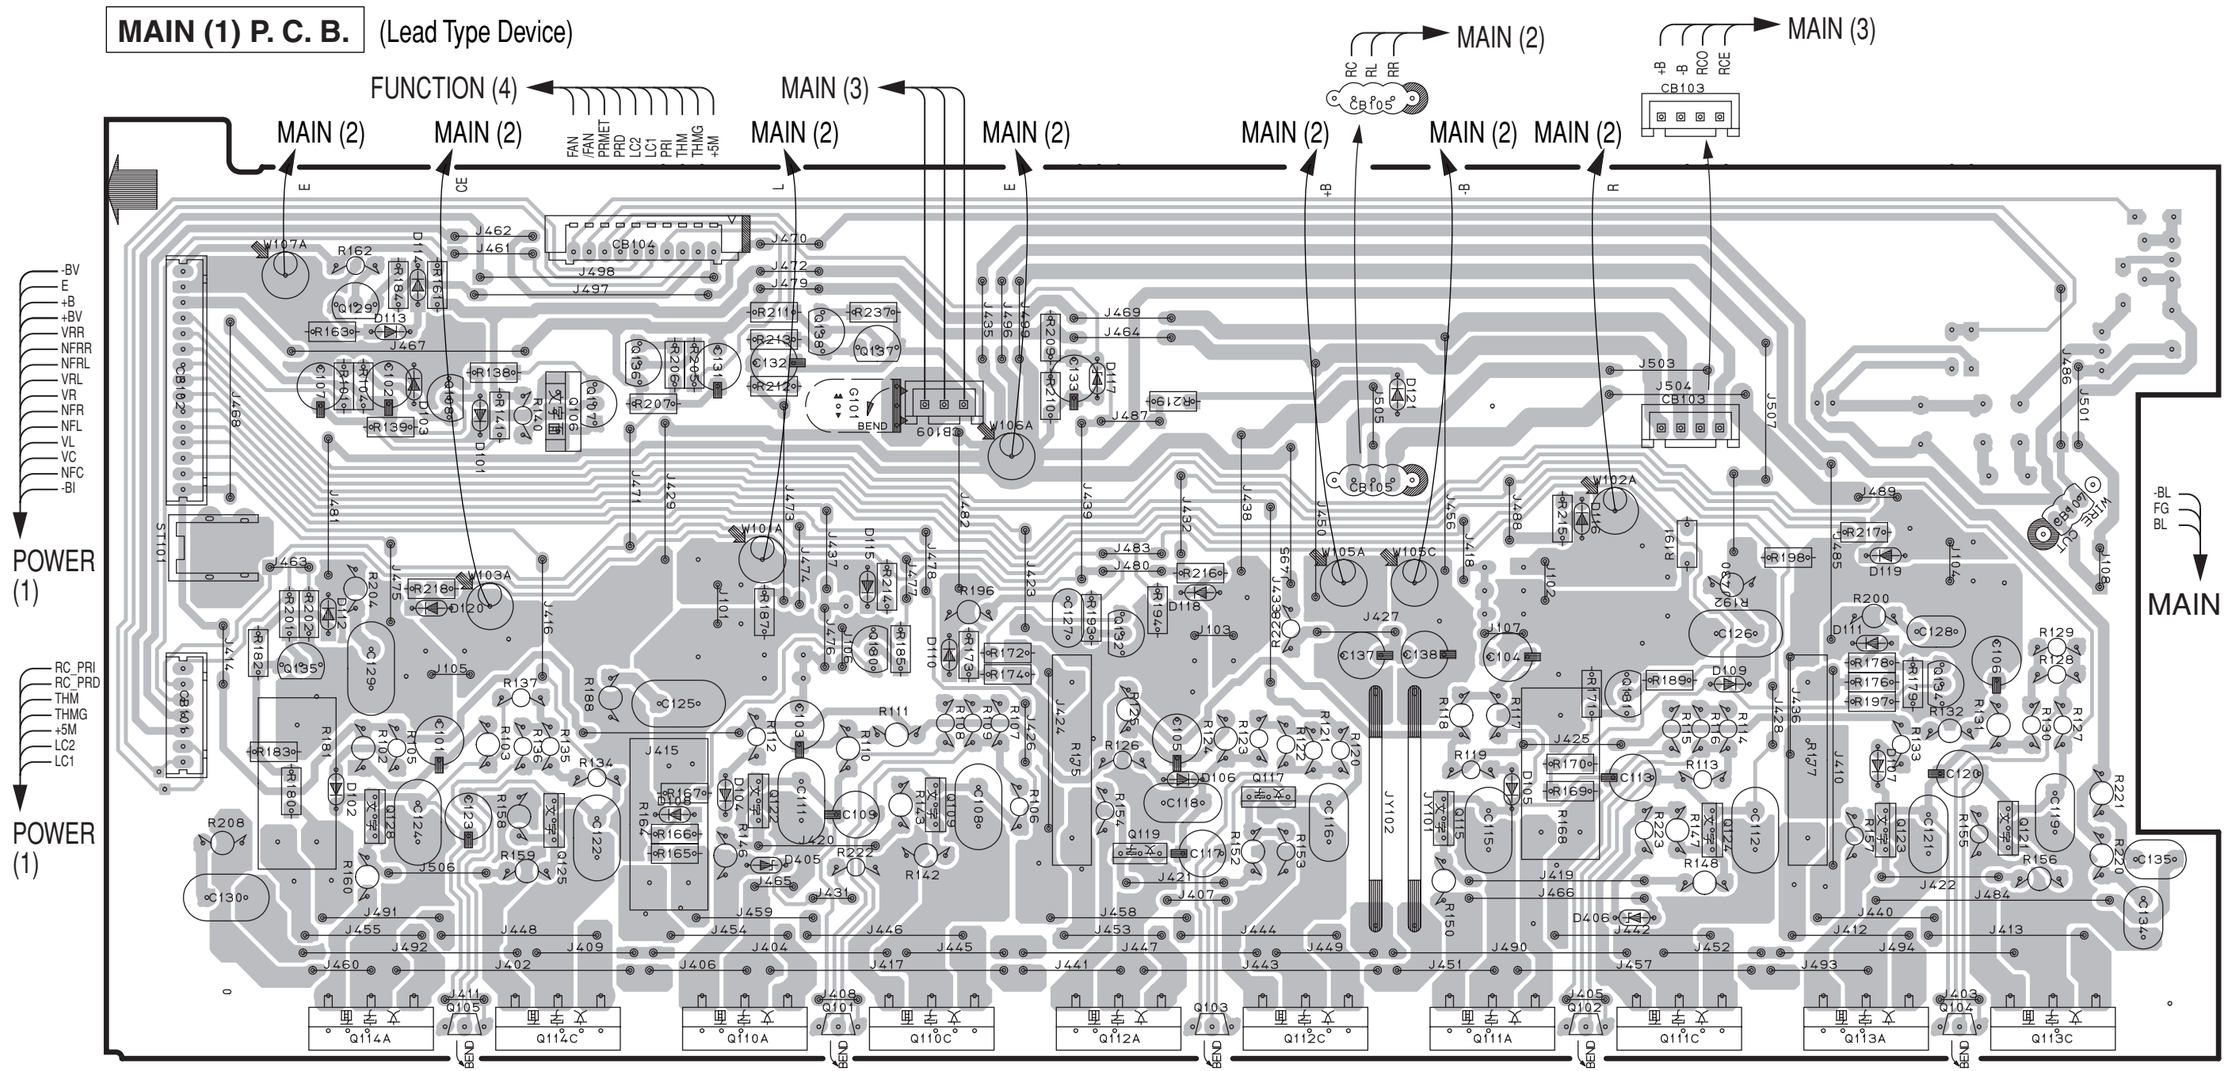

Circuit No.	J	U, C	R, T, A	K, B, G, L
C305, 308~311, 313, 318~320, 322~324, 326~328	X	X	O	O
J301, 302, 305, 306	O	X	X	X
R333, 334, 336~338	X	X	O	O
SW301	X	O	O	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D101	C3	D110	E4	D119	I4	Q105	C6	Q112A	F6	Q121	I5	Q132	F4
D102	B5	D111	I4	D120	C4	Q106	C3	Q112C	F6	Q122	D5	Q134	I4
D103	C3	D112	B4	D121	G3	Q107	C3	Q113A	I6	Q123	I5	Q135	B4
D104	D5	D113	C3	D405	D5	Q108	C3	Q113C	J6	Q124	H5	Q136	D3
D105	G5	D114	C3	D406	H5	Q109	E5	Q114A	C6	Q125	C5	Q137	E3
D106	F5	D115	E4	Q101	D6	Q110A	D6	Q114C	C6	Q128	C5	Q138	D3
D107	I5	D116	H4	Q102	H6	Q110C	E6	Q115	G5	Q129	B3		
D108	D5	D117	F3	Q103	F6	Q111A	G6	Q117	F5	Q130	E4		
D109	H4	D118	F4	Q104	I6	Q111C	H6	Q119	F5	Q131	H4		

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

MAIN (2) P. C. B. (Lead Type Device)

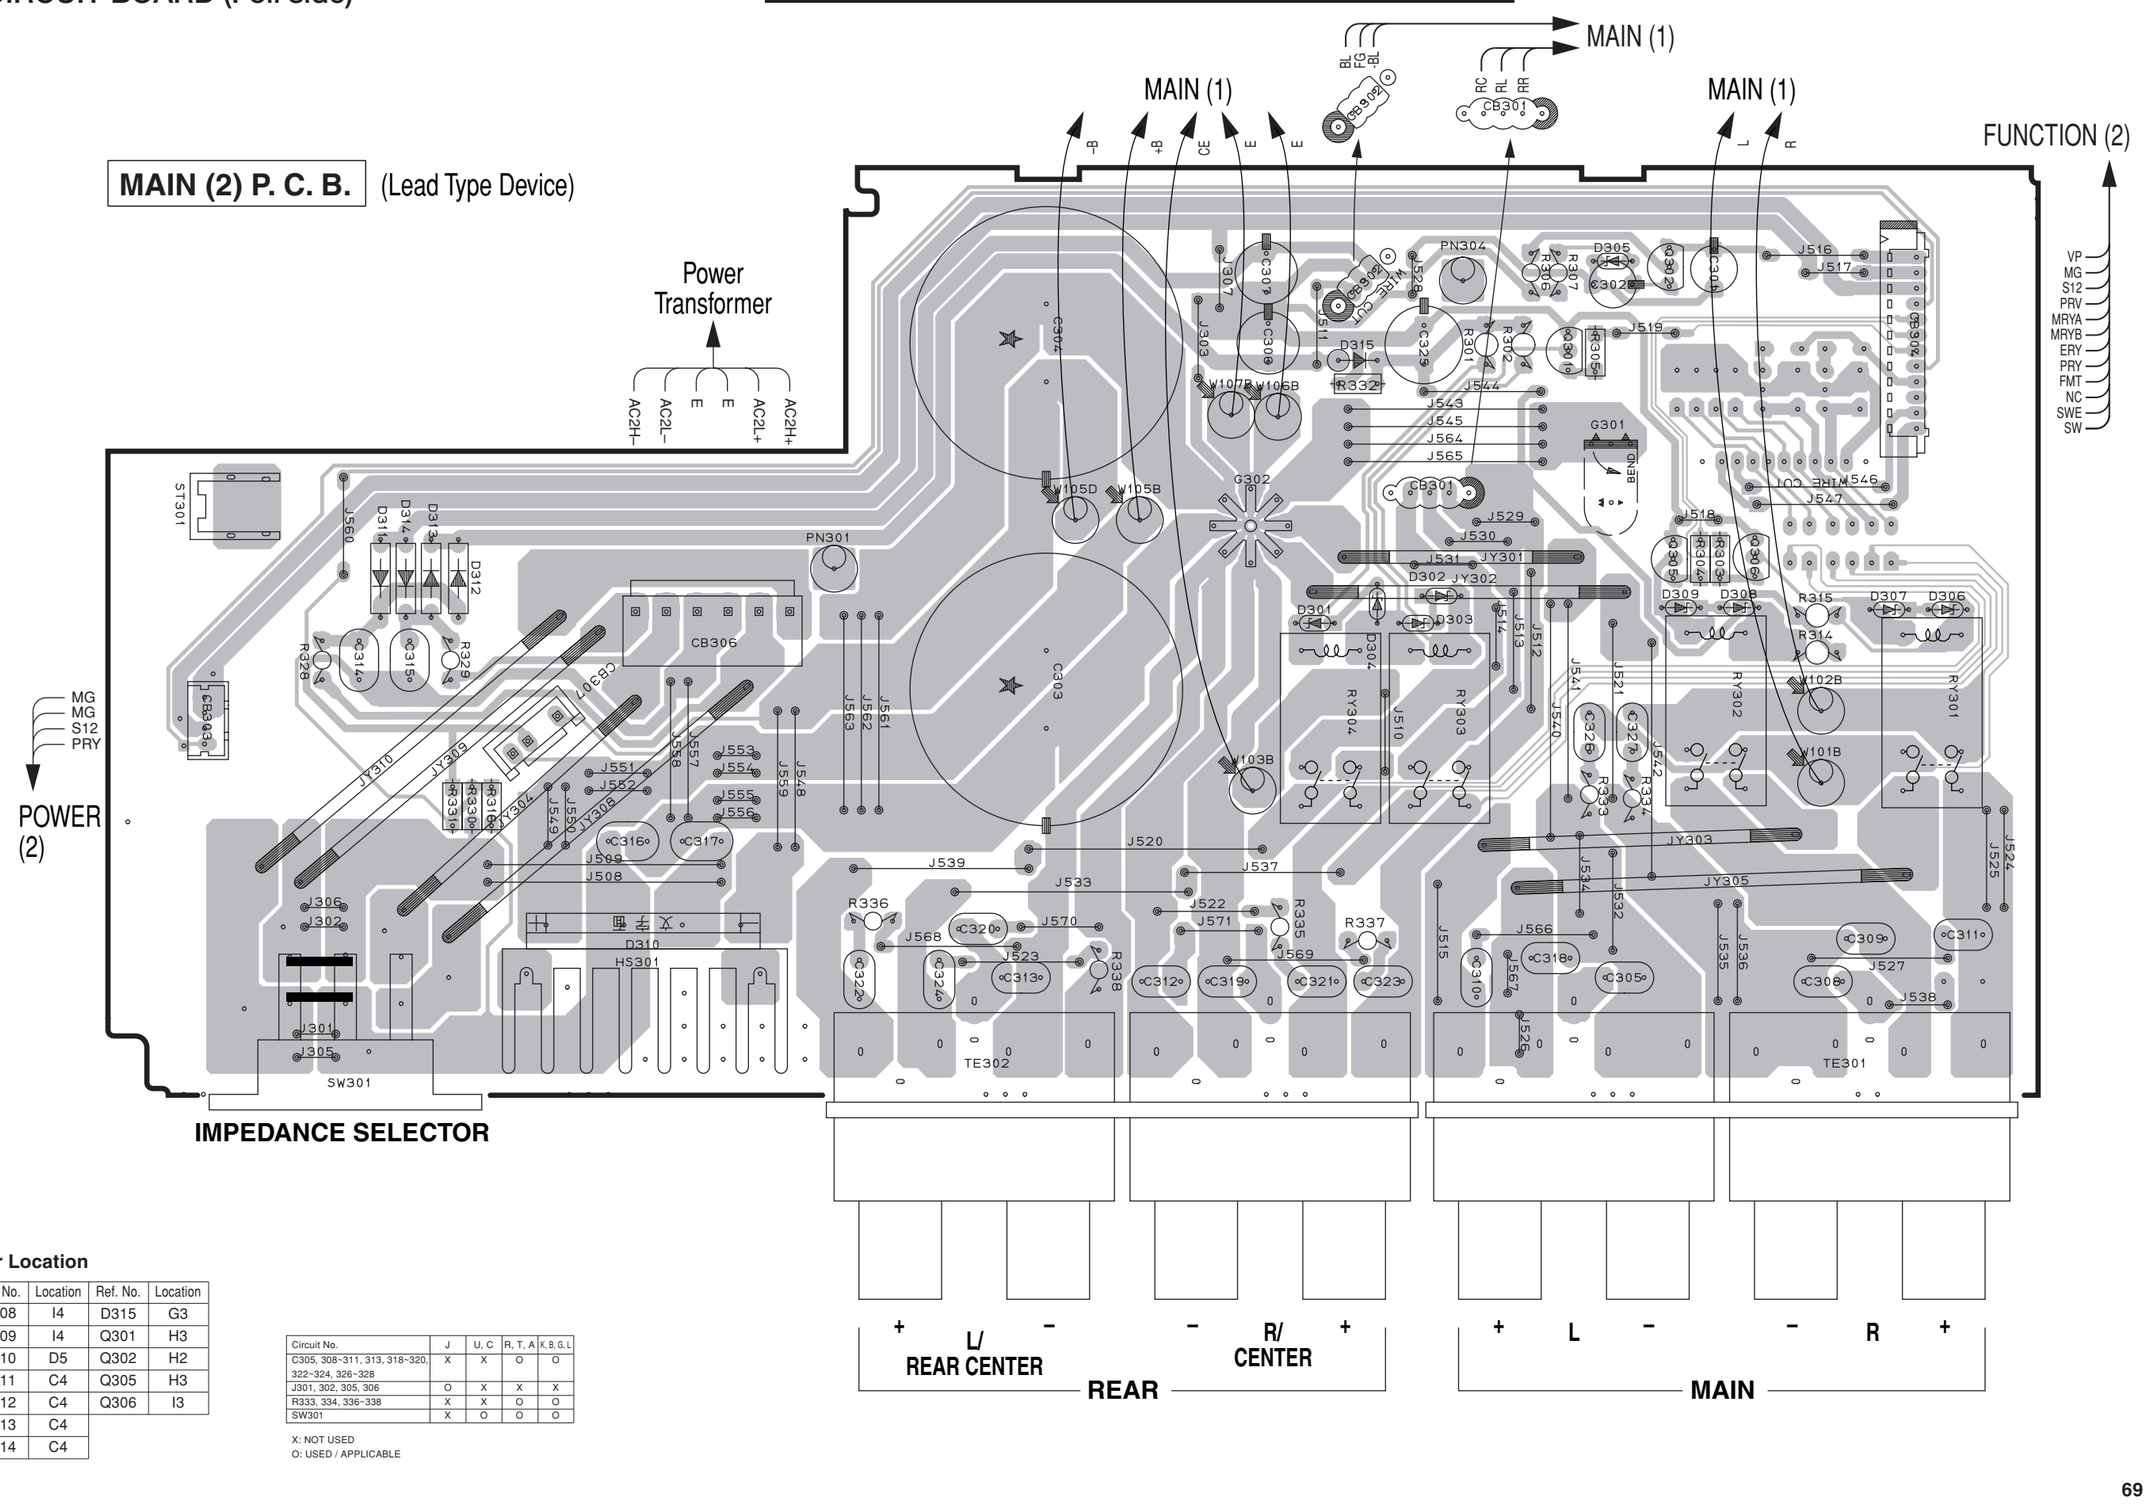

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D301	G4	D308	I4	D315	G3
D302	H4	D309	I4	Q301	H3
D303	G4	D310	D5	Q302	H2
D304	G4	D311	C4	Q305	H3
D305	H2	D312	C4	Q306	I3
D306	J4	D313	C4		
D307	I4	D314	C4		

Circuit No.	J	U, C	R, T, A	K, B, G, L
C305, 308~311, 313, 318~320, 322~324, 326~328	X	X	O	O
J301, 302, 305, 306	O	X	X	X
R333, 334, 336~338	X	X	O	O
SW301	X	O	O	O

X: NOT USED
O: USED / APPLICABLE

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

MAIN (3) P. C. B. (Lead Type Device)

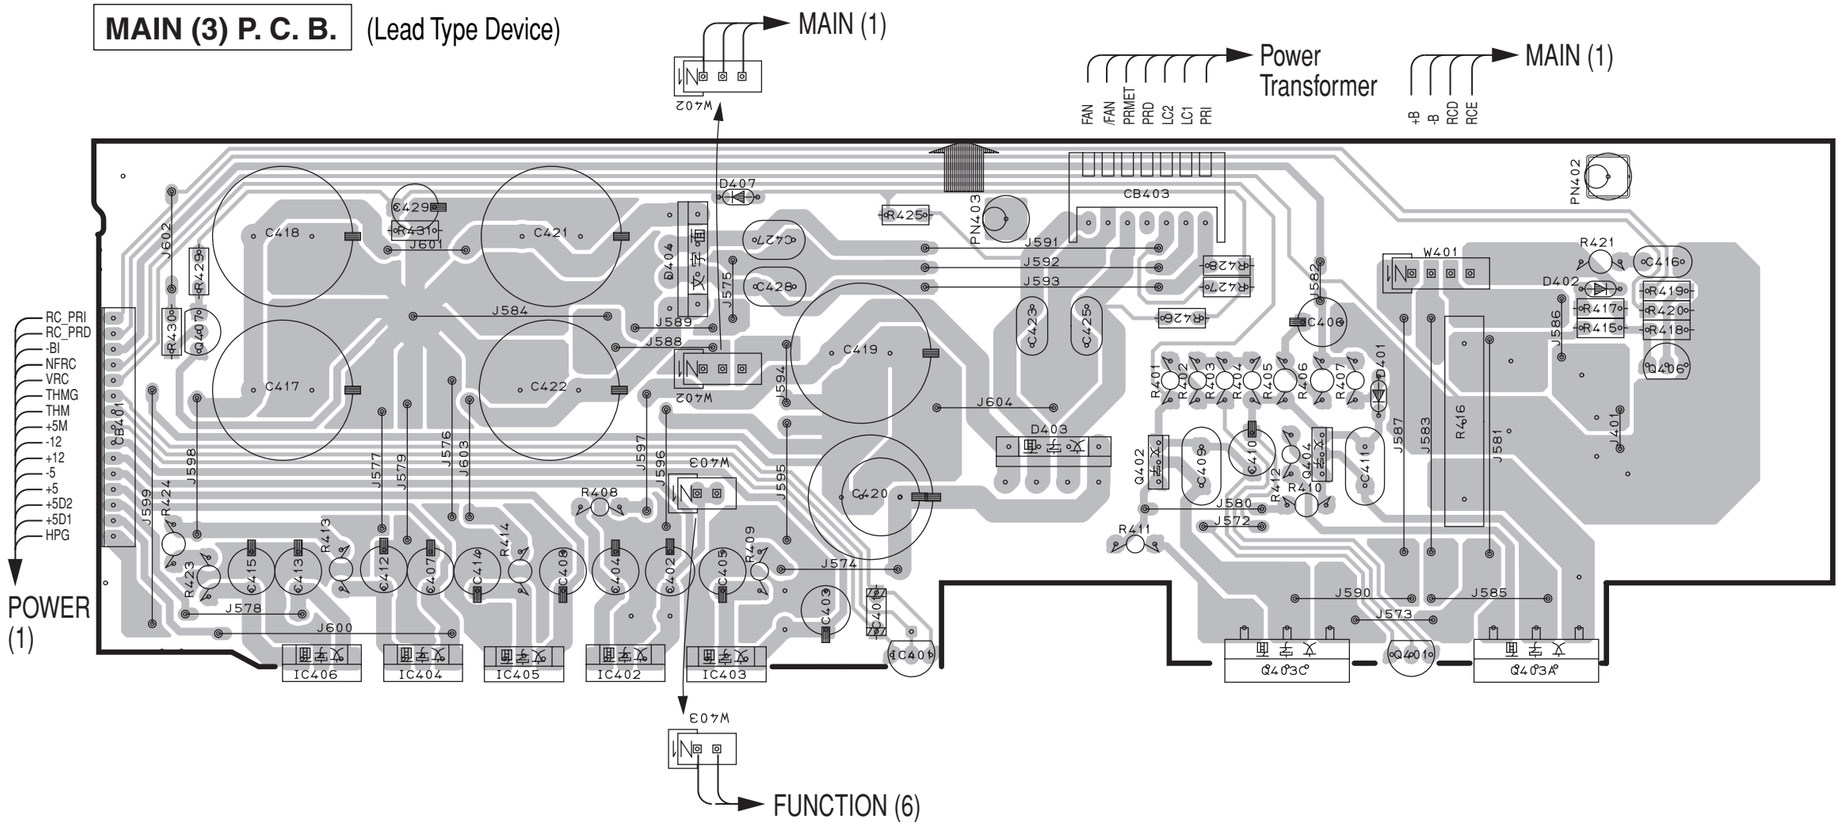

Circuit No.	J	U, C	R, T, A	K, B, G, L
C305, 308~311, 313, 318~320, 322~324, 326~328	X	X	O	O
J301, 302, 305, 306	O	X	X	X
R333, 334, 336~338	X	X	O	O
SW301	X	O	O	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
D401	G3	IC405	C4
D402	H3	IC406	B4
D403	E3	Q401	G4
D404	D3	Q402	F3
D407	D2	Q403A	G4
IC401	E4	Q403C	F4
IC402	D4	Q404	G3
IC403	D4	Q406	H3
IC404	C4	Q407	B3

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

MAIN (1) P. C. B. (Lead Type Device)

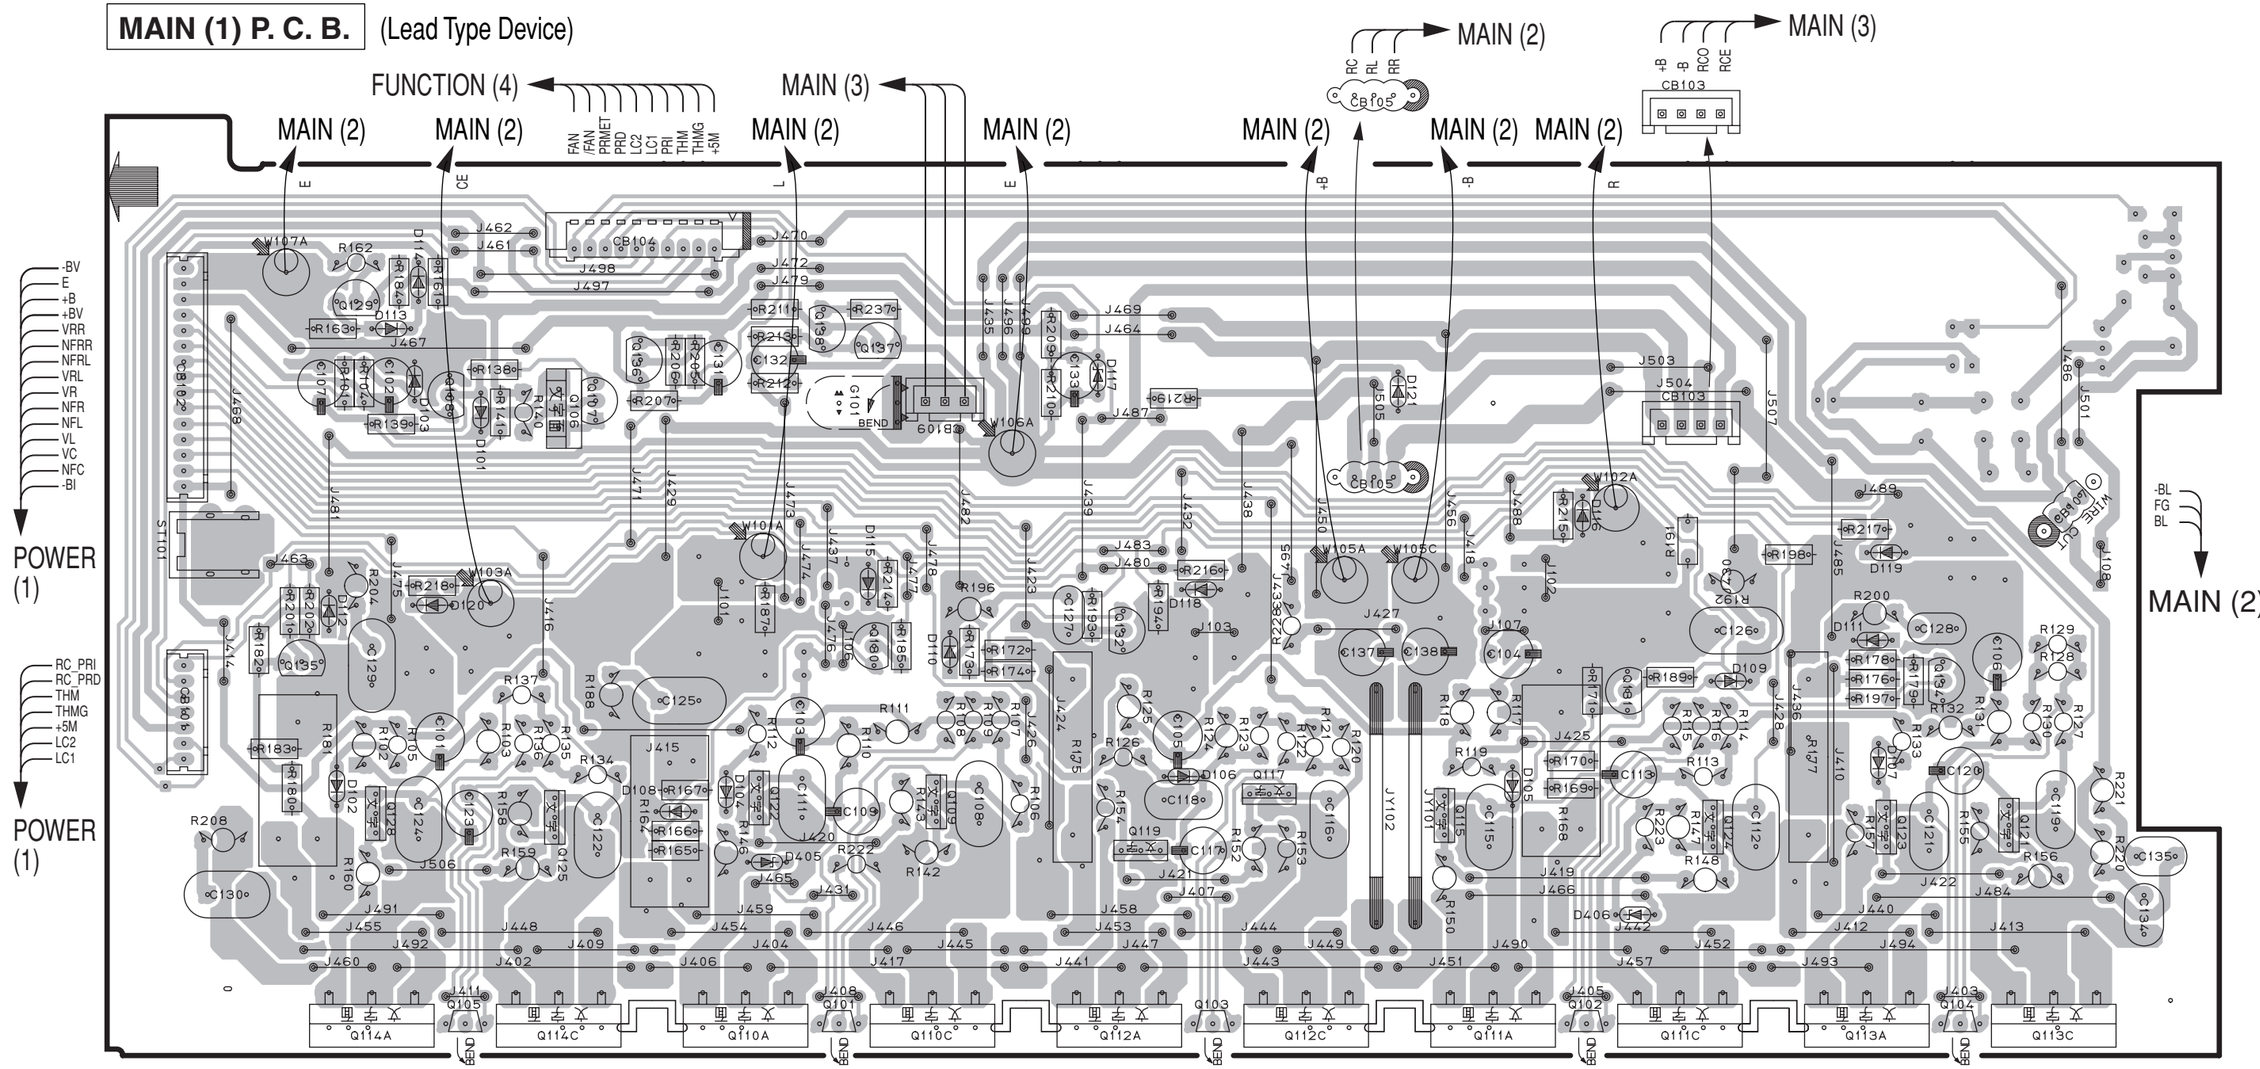

Circuit No.	J	U, C	R, T, A	K, B, G, L
C305, 308, 309~311, 313, 318~320, 322~325, 327, 328	X	X	O	O
J301, 302, 305, 306	O	X	X	X
R333, 334, 336~338	X	X	O	O
SW301	X	O	O	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D101	C3	D110	E4	D119	I4	Q105	C6	Q112A	F6	Q121	I5	Q132	F4
D102	B5	D111	I4	D120	C4	Q106	C3	Q112C	F6	Q122	D5	Q134	I4
D103	C3	D112	B4	D121	G3	Q107	C3	Q113A	I6	Q123	I5	Q135	B4
D104	D5	D113	C3	D405	D5	Q108	C3	Q113C	J6	Q124	H5	Q136	D3
D105	G5	D114	C3	D406	H5	Q109	E5	Q114A	C6	Q125	C5	Q137	E3
D106	F5	D115	E4	Q101	D6	Q110A	D6	Q114C	C6	Q128	C5	Q138	D3
D107	I5	D116	H4	Q102	H6	Q110C	E6	Q115	G5	Q129	B3		
D108	D5	D117	F3	Q103	F6	Q111A	G6	Q117	F5	Q130	E4		
D109	H4	D118	F4	Q104	I6	Q111C	H6	Q119	F5	Q131	H4		

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

MAIN (2) P. C. B. (Lead Type Device)

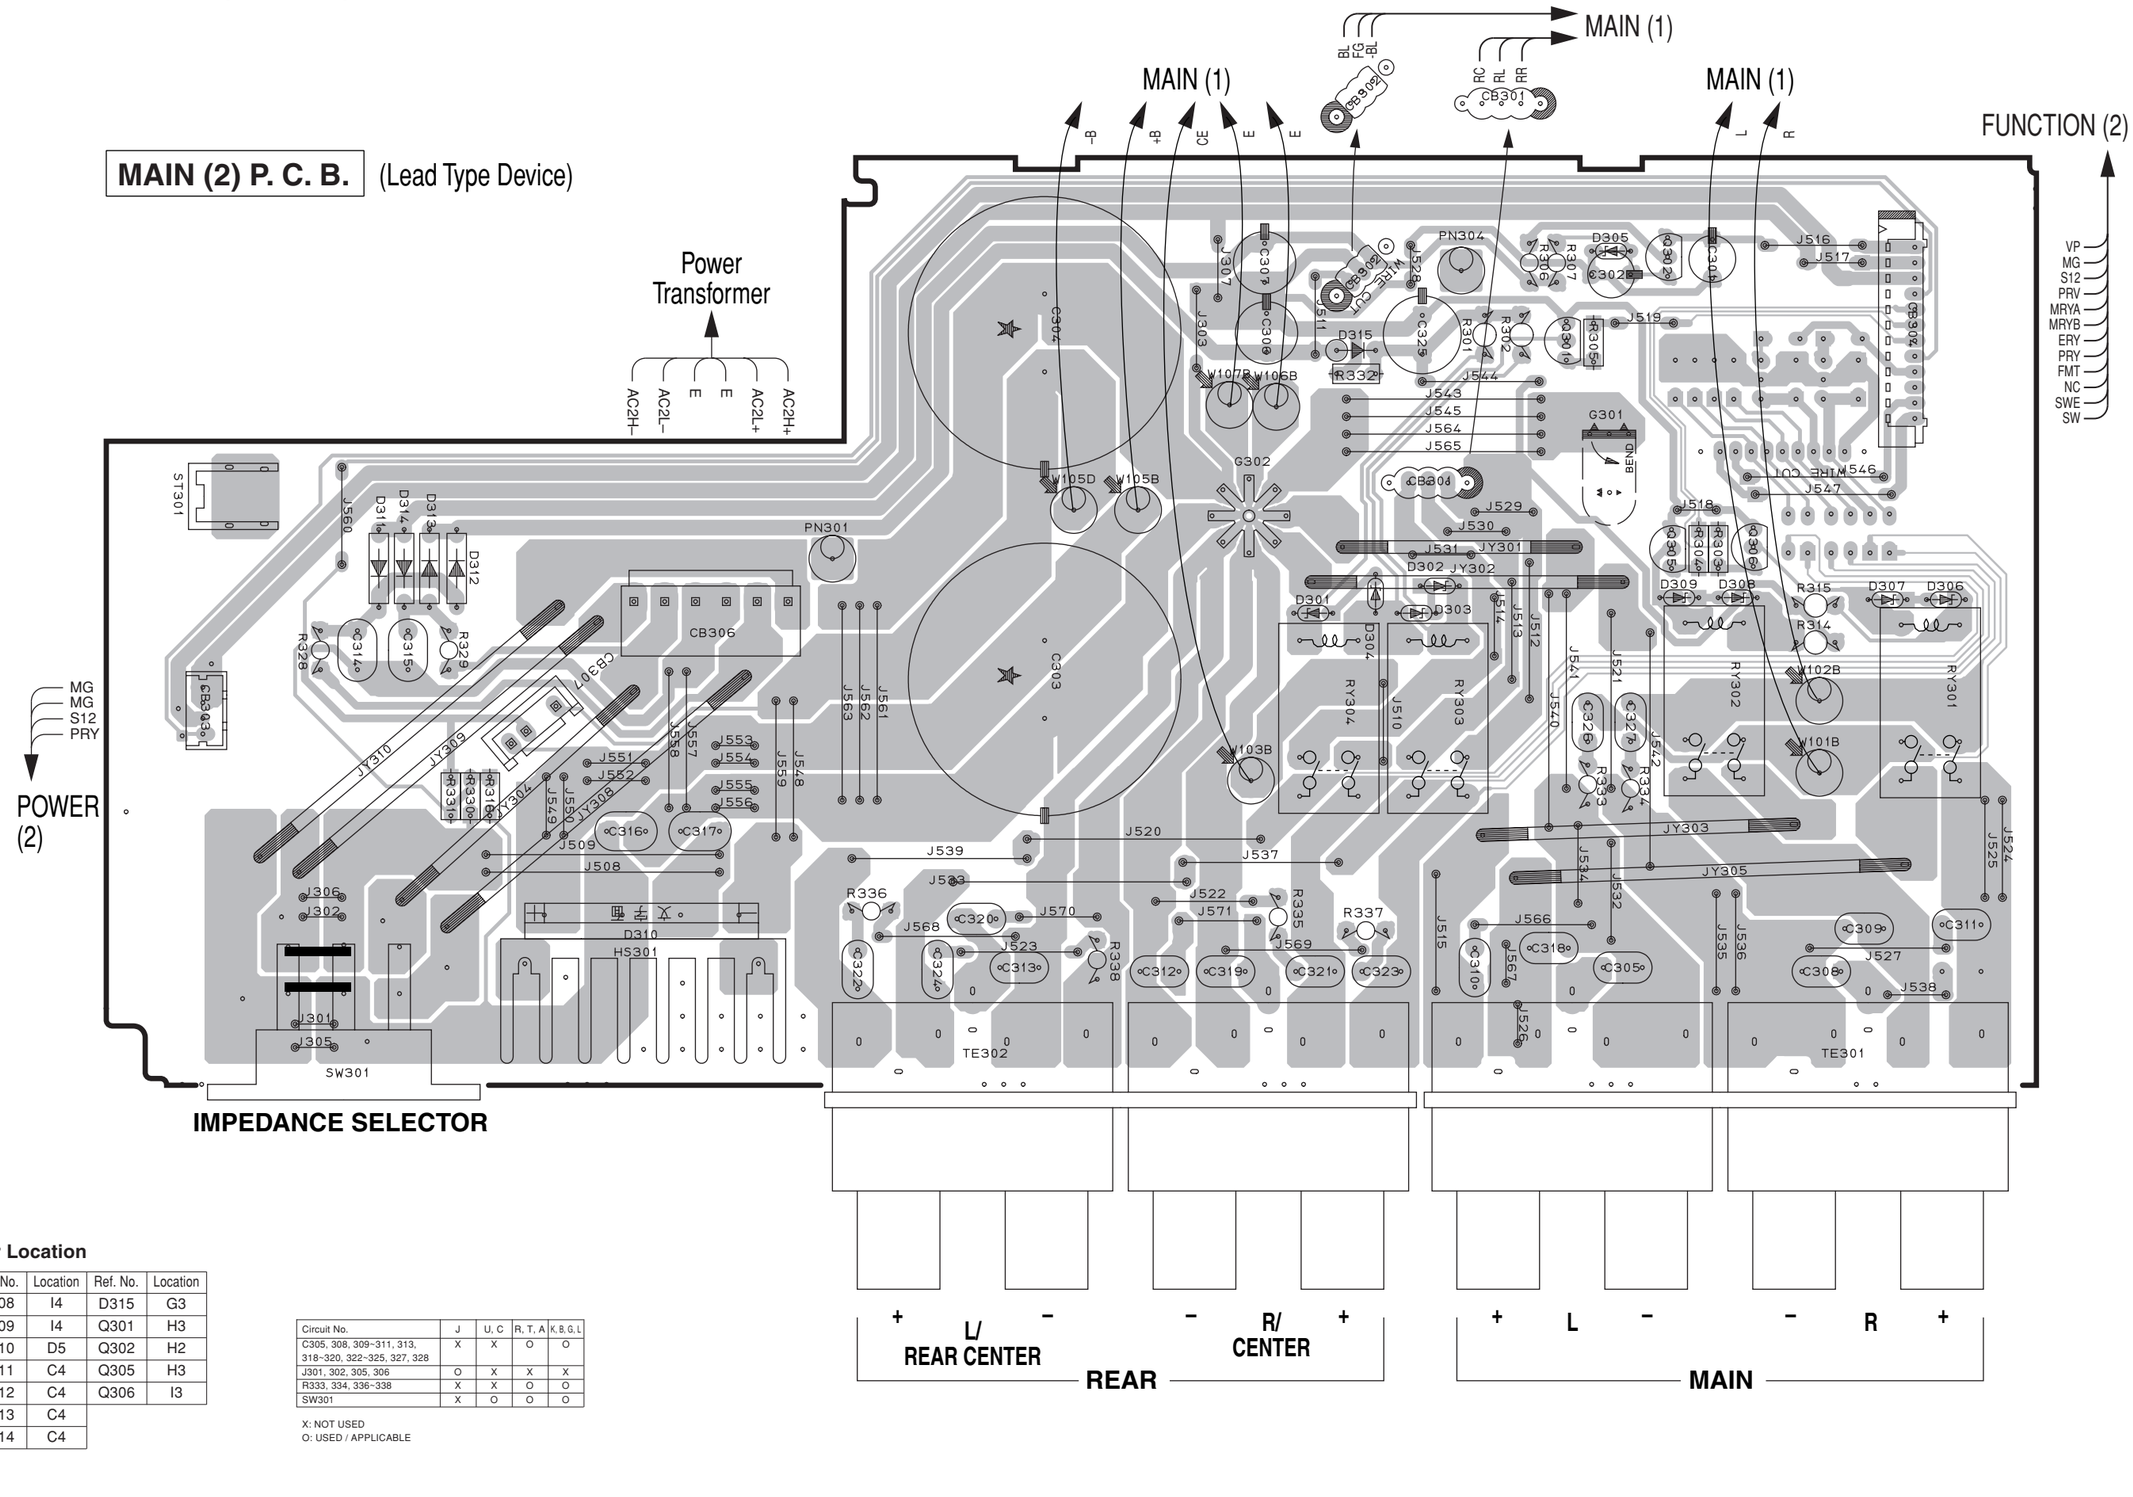

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D301	G4	D308	I4	D315	G3
D302	H4	D309	I4	Q301	H3
D303	G4	D310	D5	Q302	H2
D304	G4	D311	C4	Q305	H3
D305	H2	D312	C4	Q306	I3
D306	J4	D313	C4		
D307	I4	D314	C4		

Circuit No.	J	U, C	R, T, A	K, B, G, L
C305, 308, 309~311, 313, 318~320, 322~325, 327, 328	X	X	O	O
J301, 302, 305, 306	O	X	X	X
R333, 334, 336~338	X	X	O	O
SW301	X	O	O	O

X: NOT USED
O: USED / APPLICABLE

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

MAIN (3) P. C. B. (Lead Type Device)

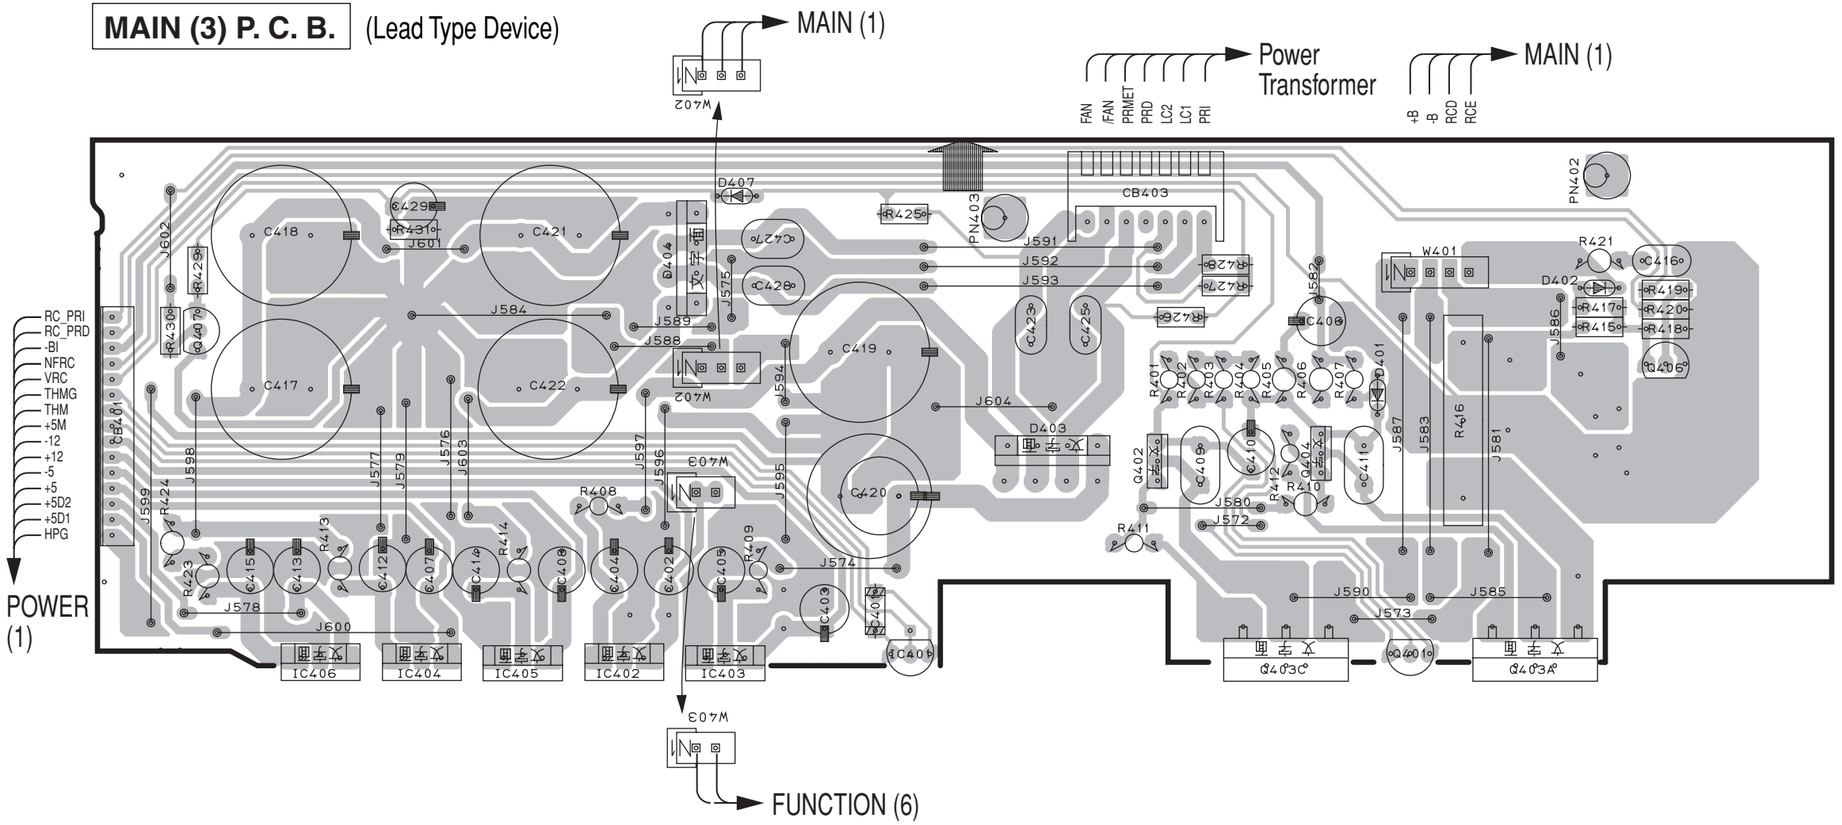

Circuit No.	J	U, C	R, T, A	K, B, G, L
C305, 308, 309~311, 313, 318~320, 322~325, 327, 328	X	X	O	O
J301, 302, 305, 306	O	X	X	X
R333, 334, 336~338	X	X	O	O
SW301	X	O	O	O

X: NOT USED
O: USED / APPLICABLE

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
D401	G3	IC405	C4
D402	H3	IC406	B4
D403	E3	Q401	G4
D404	D3	Q402	F3
D407	D2	Q403A	G4
IC401	E4	Q403C	F4
IC402	D4	Q404	G3
IC403	D4	Q406	H3
IC404	C4	Q407	B3

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

POWER (1) P. C. B. (Lead Type Device)

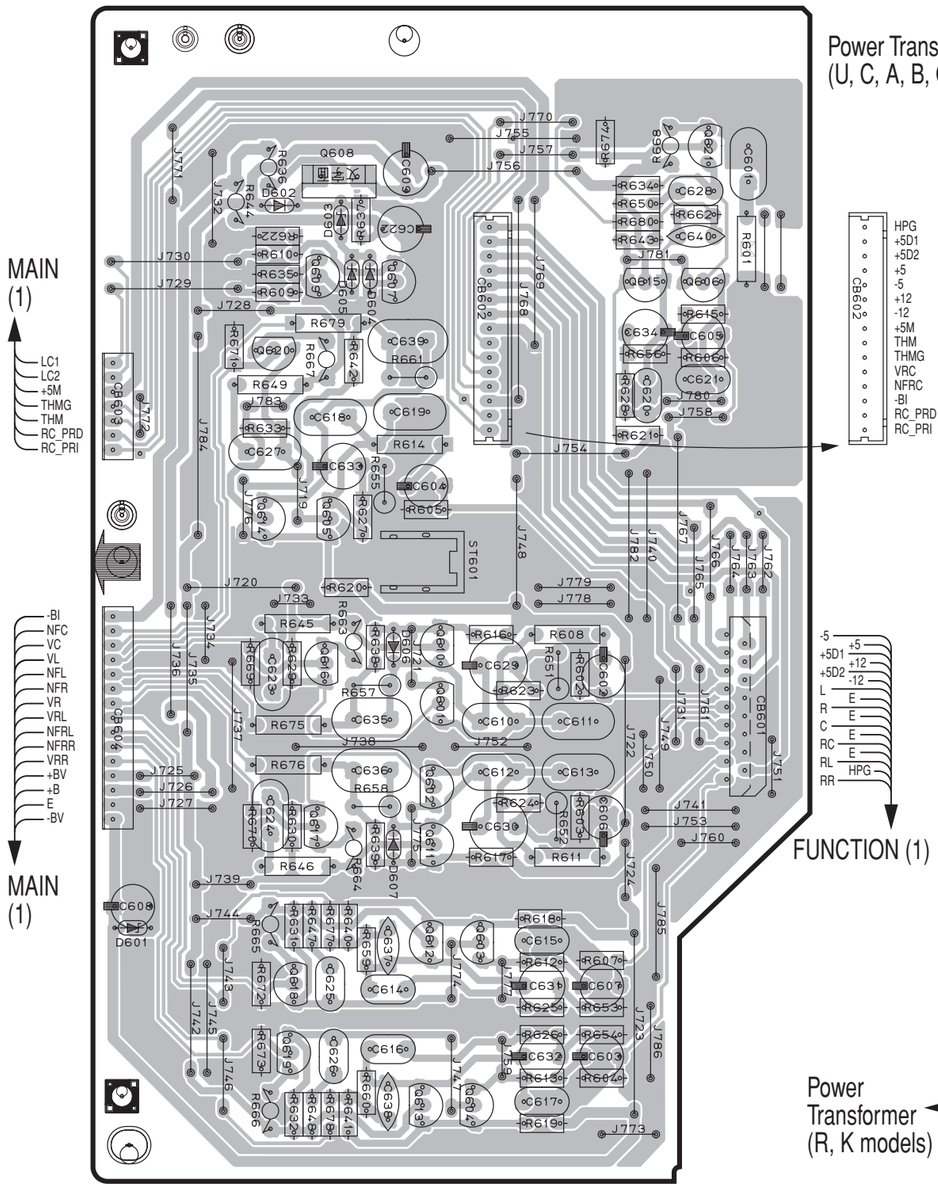

POWER (2) P. C. B. (Lead Type Device)

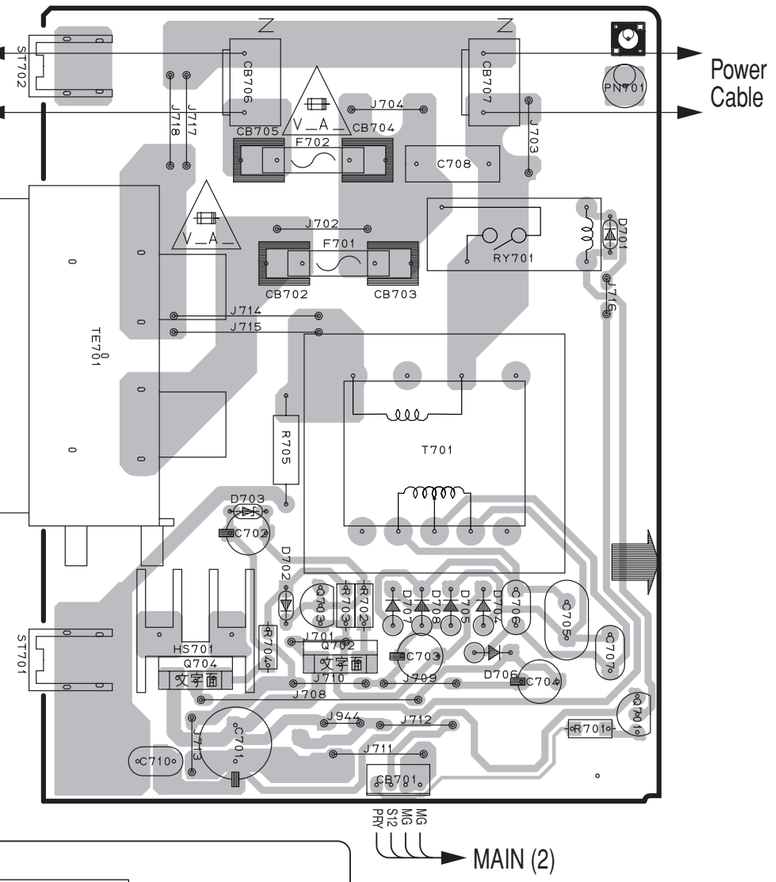

POWER (3) P. C. B. (Lead Type Device)

R, K models

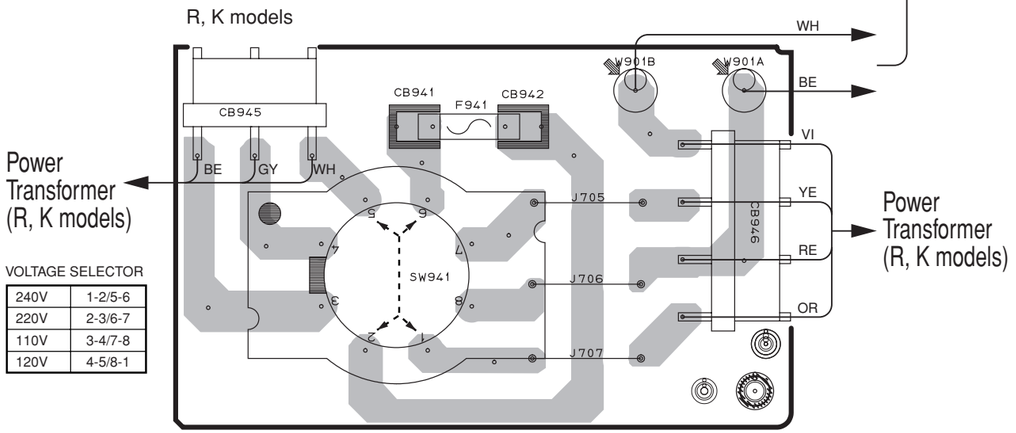

VOLTAGE SELECTOR

240V	1-2/5-6
220V	2-3/6-7
110V	3-4/7-8
120V	4-5/8-1

• Semiconductor Location

Ref. No.	Location
D601	A5
D602	B2
D603	B3
D604	B3
D605	B3
D606	B4
D607	B5
D701	H3
D702	G4
D703	F4
D704	G4
D705	G4
D706	G4
D707	G4
D708	G4
Q601	C5
Q602	C5
Q603	C6
Q604	C6
Q605	B4
Q606	D3
Q607	B3
Q608	B2
Q609	B3
Q610	C4
Q611	C5
Q612	C6
Q613	C6
Q614	B4
Q615	C3
Q616	B4
Q617	B5
Q618	B6
Q619	B6
Q620	B3
Q621	D2
Q701	H5
Q702	G4
Q703	G4
Q704	F4

Circuit No.	J	U, C	R, T, K	A	B	G, L
C702~704, 706, 707	X	X	O	X	X	X
C705	O	O	X	O	O	O
CB702, 703	X	O	X	X	X	O
CB941, 942, 945, 946	X	X	O	X	X	X
D604	X	O	O	O	O	O
D702, 703, 706	X	X	O	X	X	X
F701	X	O	X	X	X	O
F941	X	X	O	X	X	X
J701	O	O	X	O	O	O
J702	O	X	O	O	O	X
Q607	X	O	O	O	O	O
Q702~704	X	X	O	X	X	X
R610, 622	X	O	O	O	O	O
R702~704	X	X	O	X	X	X
R705	X	O	X	X	X	X
SW941	X	X	O	X	X	X
W901	X	X	O	X	X	X

X: NOT USED
O: USED / APPLICABLE

■ PRINTED CIRCUIT BOARD (Foil side)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

POWER (1) P. C. B. (Lead Type Device)

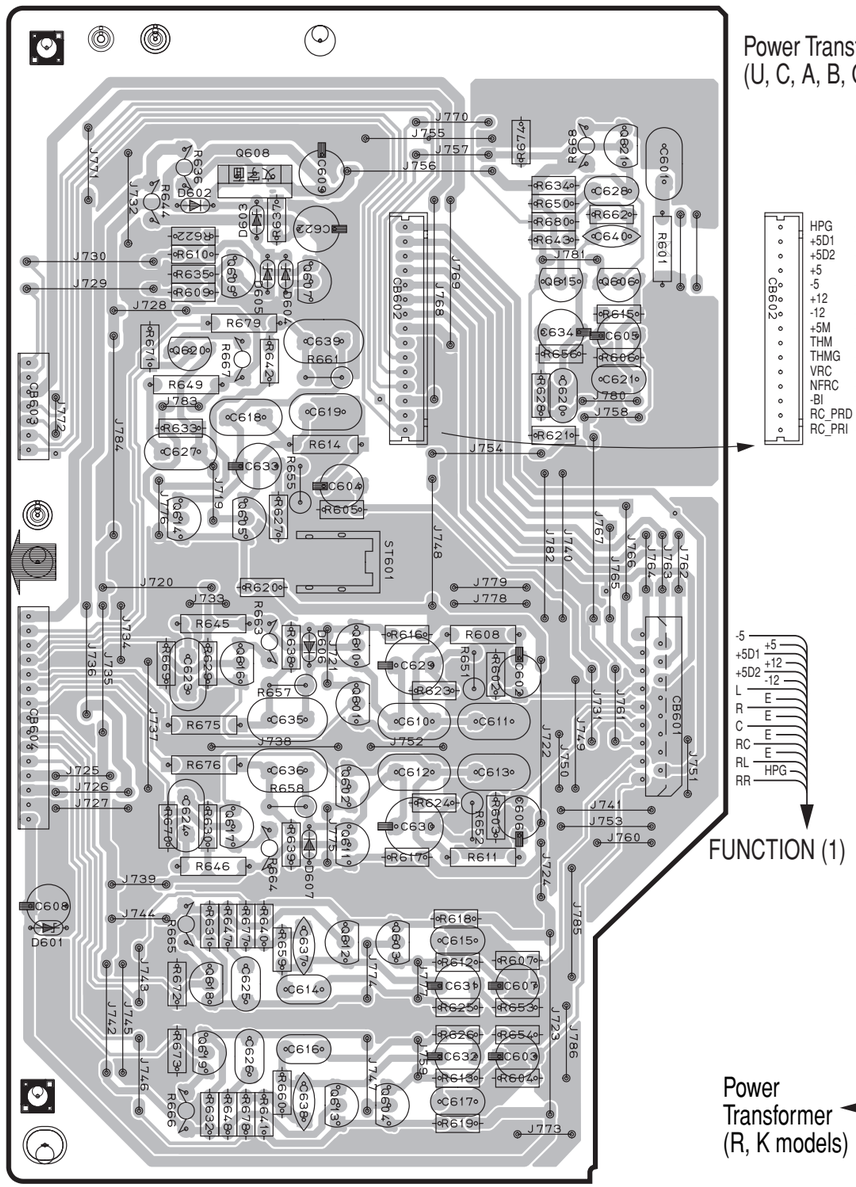

POWER (2) P. C. B. (Lead Type Device)

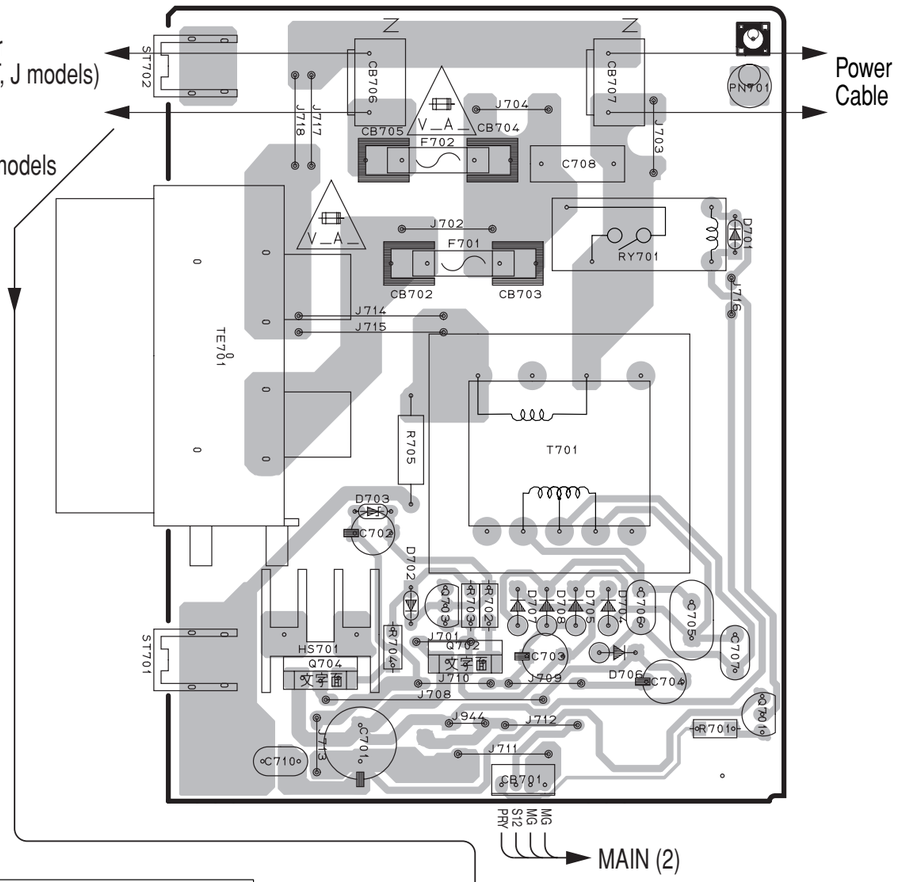

POWER (3) P. C. B. (Lead Type Device)

R, K models

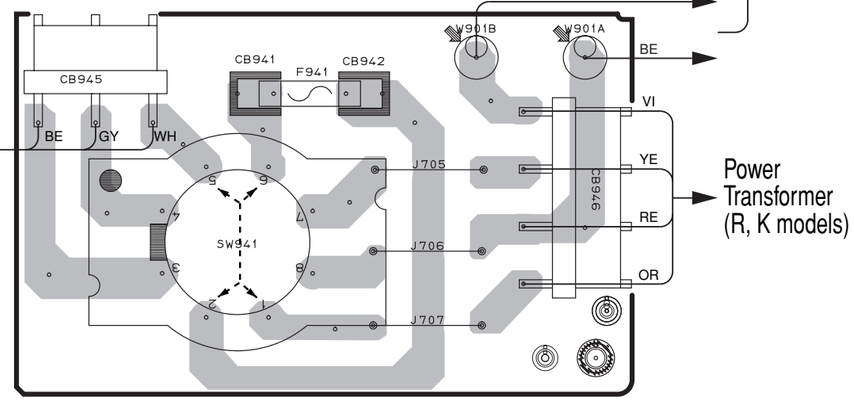

VOLTAGE SELECTOR

240V	1-2/5-6
220V	2-3/6-7
110V	3-4/7-8
120V	4-5/8-1

• **Semiconductor Location**

Ref. No.	Location
D601	A5
D602	B2
D603	B3
D604	B3
D605	B3
D606	B4
D607	B5
D701	H3
D702	G4
D703	F4
D704	G4
D705	G4
D706	G4
D707	G4
D708	G4
Q601	C5
Q602	C5
Q603	C6
Q604	C6
Q605	B4
Q606	D3
Q607	B3
Q608	B2
Q609	B3
Q610	C4
Q611	C5
Q612	C6
Q613	C6
Q614	B4
Q615	C3
Q616	B4
Q617	B5
Q618	B6
Q619	B6
Q620	B3
Q621	D2
Q701	H5
Q702	G4
Q703	G4
Q704	F4

Circuit No.	J	U, C	R, T, K	A	B	G, L
C702~704, 706, 707	X	X	O	X	X	X
C705	O	O	X	O	O	O
CB702, 703	X	O	X	X	X	O
CB941, 942, 945, 946	X	X	O	X	X	X
D604	X	O	O	O	O	O
D702, 703, 706	X	X	O	X	X	X
F701	X	O	X	X	X	O
F941	X	X	O	X	X	X
J701	O	O	X	O	O	O
J702	O	X	O	O	O	X
Q607	X	O	O	O	O	O
Q702~704	X	X	O	X	X	X
R610, 622	X	O	O	O	O	O
R702~704	X	X	O	X	X	X
R705	X	O	X	X	X	X
SW941	X	X	O	X	X	X
W901	X	X	O	X	X	X

X: NOT USED
O: USED / APPLICABLE

■ PIN CONNECTION DIAGRAM

• ICs

LM61CIZ



NJM78L05A-T3



NJM7805FA
NJM7812FA



NJM79M05FA
NJM79M12FA



µPC29M33T-E1



PQ025EZ5MZP



NJM2068MD
NJM2904M
TK15420M
µPC4570G2



NJM4556AL



LA7956



74LCX07SJX
BD3812F
NJM2581M



MM74HCU04
TC74HCT00AF
TC74HCT08AF
TC74HCU04AF



LA7104M



TC74HC153AF



TC74HC4053AF



LC72722



CY62256LL



BD3841FS
MX23C4000TC-10



MSM514260E-60JS



AK4529VQ



CS493264-CL
CS493292-CLR



BD3815KS



M66003-0101FP



M3603A00



XC9572XL-10TQ100C



YSS938



• Diodes

1N4002S
1SS133
1SS176
1SS244
1SS270A
1T2
MTZJ2.4B
MTZJ4.7C
MTZJ5.1C
MTZJ9.1B
MTZJ12.0C
MTZJ13.0A
MTZJ30.0A



1SS355
MA8075-H
RB501V-40
RLZ6.2B
UDZ5.1B
UDZ6.8B
UDZS5.6BTE-17
UDZS6.2B
UDZS9.1B



TS6P03G



KBP103G



• Transistors

2SA893A
2SA1015
2SB949
2SC1815
2SC1890A
2SC2240



2SC1740S
2SD1915F



2SB1274
2SD2396



2SA1695
2SC4468



2SA1037K
2SC2412K
2SC3326
DTA144EK

2SA1708
2SC4488



2SK246



■ SCHEMATIC DIAGRAM (DSP) RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540
RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

Page 80 E8 to FUNCTION (4)
Page 79 G2 to FUNCTION (1)

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
▨	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
▨	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
⊗	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
◉	CERAMIC TUBULAR CAPACITOR
⊗	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
ⓘ	MICA CAPACITOR
ⓟ	POLYPROPYLENE FILM CAPACITOR
●	SEMICONDUCTIVE CERAMIC CAPACITOR
ⓢ	POLYPHENYLENE SULFIDE FILM CAPACITOR

S	Parts Number	J	U·C·R·T·K·A·B·G	Memo
1	IC607	CS493292-CLR	CS493264-CL	AAC
2	R795	X	RD35647	
3	R807-810	X	100 RD35510	

x: NOT USED
O: USED / APPLICABLE

IC603: PQ025EZ5MZP Regulator

NOTICE (model)
(J)..... JAPAN
(U)..... U.S.A
(C)..... CANADA
(A)..... GENERAL
(T)..... CHINA
(K)..... KOREA
(A)..... AUSTRALIA
(B)..... BRITISH
(G)..... EUROPE
(L)..... SINGAPORE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
k1	Q602-604	2SC3326(A/B) 2SC3326(B)
k2	IC611	NJM2904M NJM2904G
k3	IC602	MSM514260E-60JS SLT44516-40J4 1541C16257-35K 1541C16257-35K 1541C16257-60K
k4	IC605	AK4529VQ AK4528VQ
k5	U602-604	GP1FA551RZ TORX179 GP1FA553RZ
k6	U601	GP1FA551TZ TOTX179 GP1FA553TZ

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
k7	IC612	TC74HCT00AF MM74HCT00SJX
k8	IC613	TC74HCU04AF MM74HCU04SJX
k9	IC614	TC74HCT08AF MM74HCT08SJX

IC608: XC9572XL-10TQ100C CPLD

IC609: CY62256LL Static RAM

IC611: NJM2904M Dual OP-Amp

IC612: TC74HCT00AF Quad 2-Input Nand Gate

IC613 : MM74HCU04SJX Hex Inverters

IC614: TC74HCT08AF Quad 2-Input And Gate

IC615: 74LCX07SJX Hex Buffer

IC623: TC74HC153AF Dual 4 to 1 Data Selectors

INPUTS			OUTPUT
SELECT	STROBE		Y
B	A	G	
X	X	H	L
L	L	L	C0
L	H	L	C1
H	L	L	C2
H	H	L	C3

Point ① Pin 1 of IC601

IC617, 618, 620: µPC4570G2
IC619, 621: NJM2068MD
Dual OP-Amp

REGULATOR

4M DRAM

DUTY CORRECTOR

DSP

IC601
YSS938-F

A/D

IC605
AK4529VQ

DECODER

IC607
SY

PLD

IC608
XC9572XL-10Q100

4M-BIT MASK ROM 256K SRAM

LEVEL CONVERT & SIGNAL DETECT

J model only

J.DESTINATION ONLY

EX-DESTINATION ONLY

CENTER

REAR L

MAIN L

IC602: MSM514260E-60JS
4Mbit DRAM

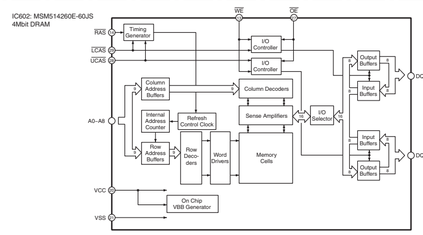

IC604: µPC29M33T-E1
Voltage Regulator



IC605: AK4529VQ
96kHz 24Bit Multi-channel CODEC



IC607: CS493264-CL
DSP



IC607 (J model): CS493292-CLR
Audio Decoder



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠ 印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (DSP)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
⊿	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
◪	FIRE PROOF CARBON FILM RESISTOR
▨	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
⊗	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
⊛	CERAMIC TUBULAR CAPACITOR
◎	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
①	MICA CAPACITOR
ⓟ	POLYPROPYLENE FILM CAPACITOR
◉	SEMICONDUCTIVE CERAMIC CAPACITOR
Ⓢ	POLYPHENYLENE SULFIDE FILM CAPACITOR

Page 82 E8 to FUNCTION (4)
Page 81 G2 to FUNCTION (1)

NOTICE (model)
(J)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(R)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
k1	Q602-604	2SC3326(A/B) 2SC3326(D)
k2	IC613	TC74HCU04AF MM74HCU04SJX
k3	IC602	MSM514260E-60JS GL744016-40J4 IS41C16257-35K IC41C16257-35K IS41C16257-60K
k4	IC605	AK4529VG AK4628VG
k5	U603	GP1FA551RZ TGR4179 GP1FA553RZ
k6	IC614	TC74HCT08AF MM74HCT08SJX

S	Parts Number	J	U-C-R-T-K-A-B-G	Memo
1	IC607	CS493264-CL	CS493264-CL	AAC
2	R795	X	4.7K RD35647	
3	C770-773	47/16 UR33747	47/16 UR33747	
4	R807-810	X	100 RD33510	

x: NOT USED
O: USED / APPLICABLE

IC602: MSM514260E-60JS
4Mbit DRAM



IC604: µPC29M33T-E1
Voltage Regulator



IC605: AK4529VD
96kHz 24Bit Multi-channel CODEC



IC607: CS493264-CL
DSP



IC607 (J model): CS493292-CLR
Audio Decoder



IC608: XC9572XL-10TQ100C
CPLD



IC609: CY62256LL
Static RAM



IC613 : MM74HCU04SJX
Hex Inverters



IC614: TC74HCT08AF
Quad 2-Input And Gate



IC615: 74LCX07SJX
Hex Buffer



IC617, 618, 620: µPC4570G2
IC619, 621: NJM2068MD
Dual OP-Amp



IC623: TC74HC153AF
Dual 4 to 1 Data Selectors



INPUTS		OUTPUT
SELECT	STROBE	
X	H	L
L	L	C0
H	L	C1
L	L	C2
H	L	C3

★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (FUNCTION 1/2) RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
▽	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
▨	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	‖
⊗	TANTALUM CAPACITOR	‖
NO MARK	CERAMIC CAPACITOR	‖
◉	CERAMIC TUBULAR CAPACITOR	‖
◎	POLYESTER FILM CAPACITOR	‖
○	POLYSTYRENE FILM CAPACITOR	‖
Ⓘ	MICA CAPACITOR	‖
Ⓟ	POLYPROPYLENE FILM CAPACITOR	‖
◍	SEMICONDUCTIVE CERAMIC CAPACITOR	‖

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
&2	Q501-504	2SC3326[A/B] 2SC3326[B]
&3	IC305・306	TC74HC4053AF MM74HC4053JUX

BD3841FS INPUT SEL.

	Pin L	Pin R	INPUT
INA	1	2	V-AUX
INB	3	4	VCR
INC	5	6	D-TV/CBL
IND	7	8	DVD
INE	9	10	MD/CDR
INF	11	12	CD
ING	13	14	TUNER
INH	15	16	------
INI	18	17	------

	Pin L	Pin R	OUTPUT
OUT1	20	19	OUTPUT
RECA	26	25	------
RECB	24	23	VCR
RECC	22	21	MD/CDR

FUNCTION 3 / FUNCTION 2 / FUNCTION 1

Page 80 D3 to FUNCTION (4) — Page 77 F1 to DSP — Page 83 A7 to OPERATION (1) — Page 83 J4 to OPERATION (4) — Page 87 A5 to POWER (1)

INPUT/ REC OUT SELECTOR — AUDIO SOUND PROCESSOR IC302 BD3813KS 7ch VOLUME — 6ch INPUT SELECTOR — 6ch IN — MUTE — MAIN L — CENTER — REAR L — LFE MIX — Center MIX — HPF — LFE — C — RC — RL — RR

IC301: BD3841FS
Function Switch

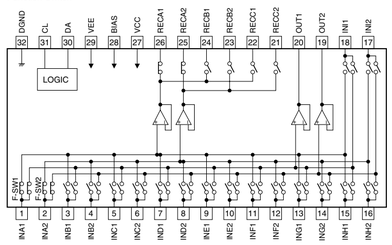

F-SW1: INPUT FUNCTION 1
F-SW2: INPUT FUNCTION 2

IC302: BD3815KS
Audio Sound Processor

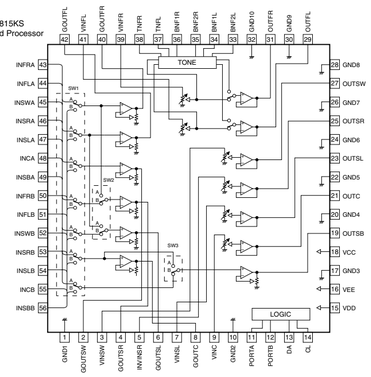

IC303: BD3812F-E2
Audio Sound Processor



IC305, 306: TC74HC4053AF
Analog Multiplexer/Demultiplexer



INPUT STATES				"ON" CHANNNEL (S)
INHIBIT	C	B	A	
0	0	0	0	0X, 0Y, 0Z
0	0	0	1	1X, 0Y, 0Z
0	0	1	0	0X, 1Y, 0Z
0	0	1	1	1X, 1Y, 0Z
0	1	0	0	0X, 0Y, 1Z
0	1	0	1	1X, 0Y, 1Z
0	1	1	0	0X, 1Y, 1Z
0	1	1	1	1X, 1Y, 1Z
1	X	X	X	NONE

IC307: NJM2068MD
IC308, 309: μPC4570G2
Dual OP-Amp.



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (FUNCTION 2/2) RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	ES
⊗	TANTALUM CAPACITOR	
NO MARK	CERAMIC CAPACITOR	
◉	CERAMIC TUBULAR CAPACITOR	
◎	POLYESTER FILM CAPACITOR	
○	POLYSTYRENE FILM CAPACITOR	
Ⓘ	MICA CAPACITOR	
⊛	POLYPROPYLENE FILM CAPACITOR	
●	SEMICONDUCTIVE CERAMIC CAPACITOR	

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
▽	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
◪	FIRE PROOF CARBON FILM RESISTOR
▯	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

NOTICE (model)
(U)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(R)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
&1	IC733	TC74HCU04AFEL MM74HCU04SJX
&2		
&3	IC731.734.822	TC74HC4053AF MM74HC4053JX
&4	Q601.604.606.607	2SA1037AK(Q/R/S) 2SA1235A(E/F)
&5	Q602.821	2SC2412K(Q/R/S) 2SD601A(TX/SX/S
&6	Q609.701-706.731.732 734-736.801.804	2SC1740S(R/S) 2SC2631(E/F) 2SC3311A(Q/R/S)
&7	IC732.735	TK15420MTL AD8056AR
&8	Q733	2SD1915F(S/T) 2SC2878(A/B)

Page 84 D1 to VIDEO
G5 to FUNCTION (7)
I1 to FUNCTION (5)
E1 to FUNCTION (6)
Page 79 F2 to FUNCTION (1)
C3 to FUNCTION (4)
Page 85 H1 to MAIN (3)
B3 to FUNCTION (4)
Page 85 E5 to MAIN (2)
Page 85 E1 to MAIN (1)
Page 83 E8 to OPERATION (1)
Page 77 E1 to DSP

[R-T model only]

VIA	VIB	
H	H	DVD
L	H	D-TV
H	L	VCR
L	L	V-AUX

C-INPUT SELECTOR

VIA	VIB	
H	H	DVD
L	H	D-TV
H	L	VCR
L	L	IN4/IN1T

INPUT SELECTOR
Y-INPUT SELECTOR
S-SIGNAL DETECTOR
Y/C MIX
Y SELECTOR
Cb SELECTOR
Cr SELECTOR

COMP1	CMP0	
H	H	DVD
L	H	D-TV
H	L	INH

[RDS model only]
[U-C-R-T-K-A-B-G-L only]

		J	U-C	R-T-K	A-L	B-G	
s16	R619	100K RD35810	X	X	100K RD35810	100K RD35810	Destination
s17	R621	100K RD35810	100K RD35810	X	X	X	
s18	R620	X	100K RD35810	100K RD35810	X	X	
s19	R622	X	X	100K RD35810	100K RD35810	100K RD35810	
s20	D604	UDZ5R6-8B VU17220	UDZ5R6-8B VU17220	UDZ5R6-2B VU17210	UDZ5R6-8B VU17220	UDZ5R6-8B VU17220	
s21	R606	22K RD35722	22K RD35722	15K RD35715	22K RD35722	22K RD35722	
s22	J601	0 RD35000	0 RD35000	0 RD35000	0 RD35000	X	
s23	IC603	X	X	X	X	LC72722 XYS3440	IR REST
s24	XL602	X	X	X	X	4.332MHz V352G00	
s25	C637-639	X	X	X	X	27PCH VA76110	
s26	C632-633	X	X	X	X	330P UG05233	
s27	C636	X	X	X	X	560P UG05256	
s28	C638 C631	X	X	X	X	0.1/16 US13510	
s29	C634-635-640	X	X	X	X	47/25 UR84747	
s30	R656	X	X	X	X	100 RD35610	
s31	R657-658	X	X	X	X	470 RD35547	
s32	R659-660	X	X	X	X	10K RD35710	
s33	R655	X	X	X	X	22K RD35722	
s34	L601	X	X	X	X	220uH VU88950	
s35	Q609	X	X	X	X	IC17402	
s36	R654	X	X	X	X	2.2K RD35622	
s37	R653	X	X	X	X	33K RD35733	
s38	R652	X	X	X	X	100K RD35810	
s44	R841	X	X	X	X	100K RD35810	
s45	SW801	X	X	PQ22KJB V362430	X	X	
s49	J802	o	o	X	o	o	
s50	J731.J732	X	X	o	X	X	
s51	IC732	TK15420M XW03940	TK15420M XW03940	X	TK15420M XW03940	TK15420M XW03940	
s52	IC731	TC74HC4053AF XY87940	TC74HC4053AF XY87940	X	TC74HC4053AF XY87940	TC74HC4053AF XY87940	
s53	T731	KS-WT/038067 Y924320	KS-WT/038067 Y924320	X	KS-WT/038067 Y924330	KS-WT/038067 Y924330	
s55	R743.R744.R746 R747	1K RD35610	1K RD35610	X	1K RD35610	1K RD35610	
s56	R735.R736.R741 R742	470 RD35547	470 RD35547	X	470 RD35547	470 RD35547	
s57	W607	WF40412	X	X	X	X	
s58	CB607	X	V782550 TUC-R05B-B1	V782550 TUC-R05B-B1	V782550 TUC-R05B-B1	V782550 TUC-R05B-B1	
s59	Q733	X	X	D1915F(S/T)	X	X	
s60	R853	X	X	10K RD35710	X	X	

x: NOT USED
O: USED / APPLICABLE

Note: IC821 LA7104M for P.W.B. A to D version.
NJM2581M for P.W.B. E or later version.

Point ② Pin 13 of IC601



Point ③ Pin 12 of IC603



Point ④ Emitter of Q601 and collector of Q602



IC602: NJM78L05A-T3
Voltage Regulator



IC603: LC72722
RDS Decoder



IC701, 702, 801: LA7956
Video Switch



IC731, 734, 822: TC74HC4053AF
Analog Multiplexer/Demultiplexer



INPUT STATES				"ON" CHANNNEL (S)
INHIBIT	C	B	A	
0	0	0	0	0X, 0Y, 0Z
0	0	0	1	1X, 0Y, 0Z
0	0	1	0	0X, 1Y, 0Z
0	0	1	1	1X, 1Y, 0Z
0	1	0	0	0X, 0Y, 1Z
0	1	0	1	1X, 0Y, 1Z
0	1	1	0	0X, 1Y, 1Z
0	1	1	1	1X, 1Y, 1Z
1	X	X	X	NONE

IC732, 735: TK15420M
Video Amp



IC733: TC74HCU04AFEL
Hex Inverters



IC821: LA7104M
Video Amp



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (FUNCTION 1/2) RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
▨	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
▨	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	‖
⊗	TANTALUM CAPACITOR	‖
NO MARK	CERAMIC CAPACITOR	‖
◉	CERAMIC TUBULAR CAPACITOR	‖
◎	POLYESTER FILM CAPACITOR	‖
○	POLYSTYRENE FILM CAPACITOR	‖
Ⓘ	MICA CAPACITOR	‖
Ⓟ	POLYPROPYLENE FILM CAPACITOR	‖
◍	SEMICONDUCTIVE CERAMIC CAPACITOR	‖

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
&2	Q501-504	2SC3326[A/B] 2SC3326[B]
&3	IC305・306	TC74HC4053AF MM74HC4053JUX

BD3841FS INPUT SEL.

	Pin L	Pin R	INPUT
INA	1	2	V-AUX
INB	3	4	VCR
INC	5	6	D-TV/CBL
IND	7	8	DVD
INE	9	10	MD/CDR
INF	11	12	CD
ING	13	14	TUNER
INH	15	16	------
INI	18	17	------

	Pin L	Pin R	OUTPUT
OUT1	20	19	OUTPUT
RECA	26	25	------
RECB	24	23	VCR
RECC	22	21	MD/CDR

FUNCTION 3 · FUNCTION 2 · FUNCTION 1

Page 82 D3 to FUNCTION (4) · Page 78 F1 to DSP · Page 83 A7 to OPERATION (1) · Page 83 J4 to OPERATION (4) · Page 88 A5 to POWER (1)

INPUT/ REC OUT SELECTOR · AUDIO SOUND PROCESSOR IC302 BD3813KS 7ch VOLUME · MUTE · LFE MIX · Center MIX · MAIN L · CENTER · REAR L

IC301: BD3841FS
Function Switch

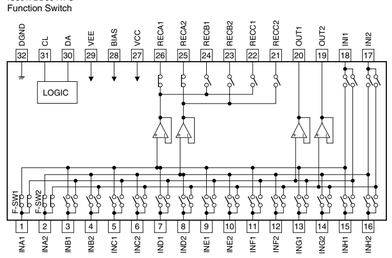

* F-SW1: INPUT FUNCTION 1
* F-SW2: INPUT FUNCTION 2

IC302: BD3815KS
Audio Sound Processor

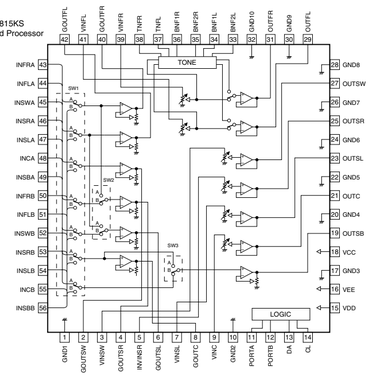

IC303: BD3812F-E2
Audio Sound Processor



IC305, 306: TC74HC4053AF
Analog Multiplexer/Demultiplexer



INPUT STATES				"ON" CHANNNEL (S)
INHIBIT	C	B	A	
0	0	0	0	0X, 0Y, 0Z
0	0	0	1	1X, 0Y, 0Z
0	0	1	0	0X, 1Y, 0Z
0	0	1	1	1X, 1Y, 0Z
0	1	0	0	0X, 0Y, 1Z
0	1	0	1	1X, 0Y, 1Z
0	1	1	0	0X, 1Y, 1Z
0	1	1	1	1X, 1Y, 1Z
1	X	X	X	NONE

IC307: NJM2068MD
IC308, 309: μPC4570G2
Dual OP-Amp.



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (FUNCTION 2/2)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

CAPACITOR		
REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	⊣⊢
⊗	TANTALUM CAPACITOR	
NO MARK	CERAMIC CAPACITOR	⊣⊢
❀	CERAMIC TUBULAR CAPACITOR	
◎	POLYESTER FILM CAPACITOR	
○	POLYSTYRENE FILM CAPACITOR	
Ⓘ	MICA CAPACITOR	
Ⓟ	POLYPROPYLENE FILM CAPACITOR	
●	SEMICONDUCTIVE CERAMIC CAPACITOR	

RESISTOR		
REMARKS	PARTS NAME	
NO MARK	CARBON FILM RESISTOR (P=5)	
▨	CARBON FILM RESISTOR (P=10)	
△	METAL OXIDE FILM RESISTOR	
▲	METAL FILM RESISTOR	
▧	METAL PLATE RESISTOR	
◪	FIRE PROOF CARBON FILM RESISTOR	
□	CEMENT MOLDED RESISTOR	
⊘	SEMI VARIABLE RESISTOR	
■	CHIP RESISTOR	

NOTICE (model)
(J)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(R)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
&1		
&2		
&3	IC822	TC74HC4053AF MM74HC4053S-JX
&4	Q601-604.606.607	2SA1037AK[Q/R/S] 2SA1235A[E/F]
&5	Q602-821	2SC2412K[Q/R/S] 2SD601A[TX]Q/R/S
&6	Q609-801~803	2SC1740S[R/S] 2SC2631[E/F] 2SC3311A[Q/R/S]
&7		
&8		

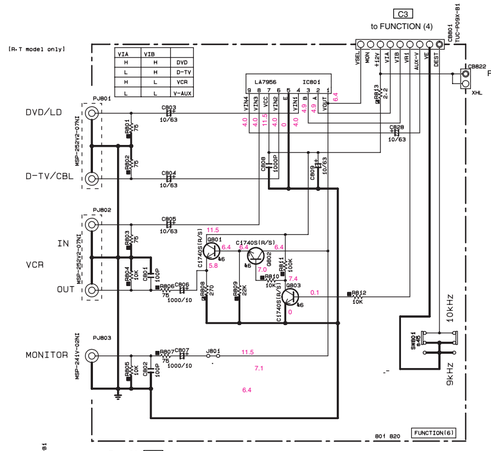

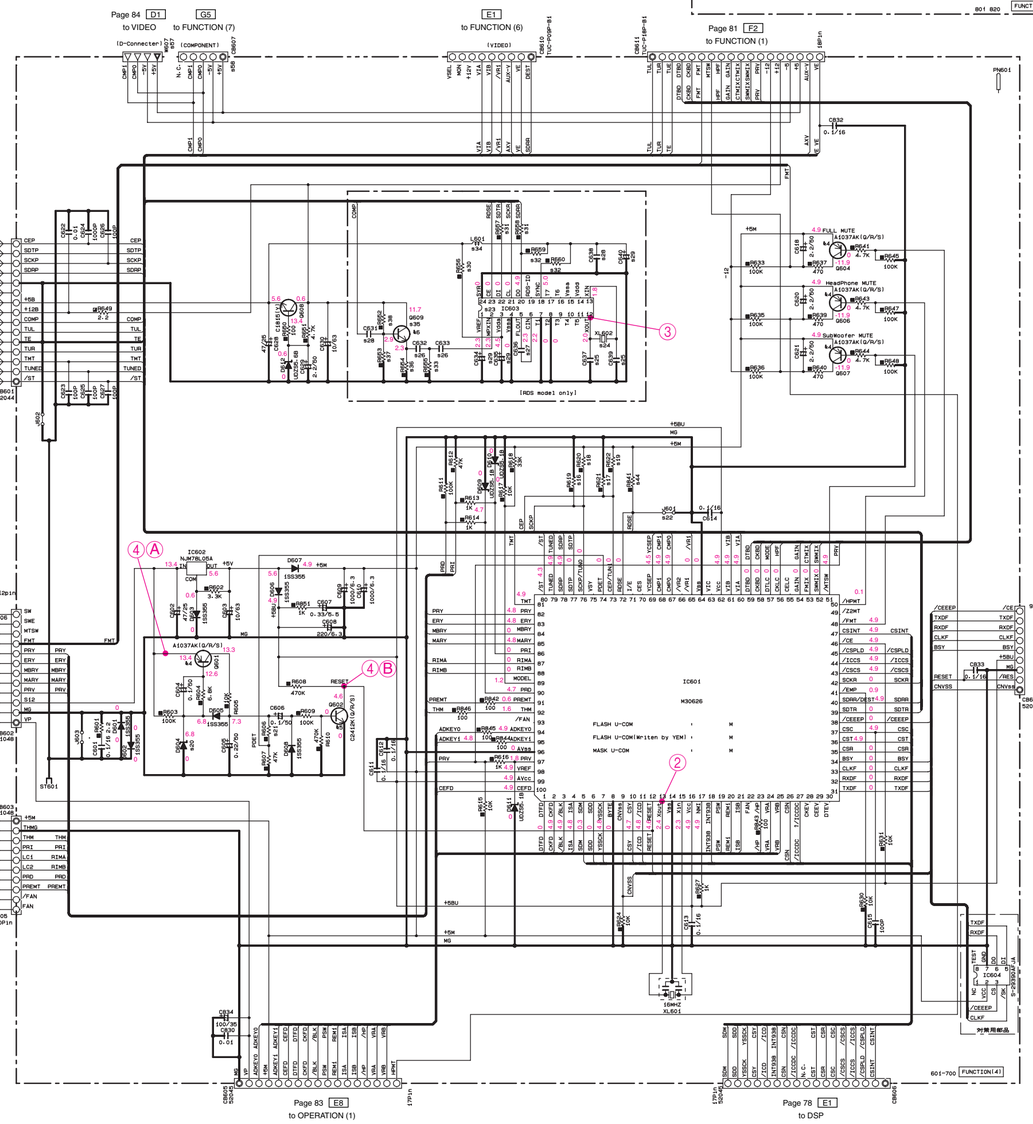

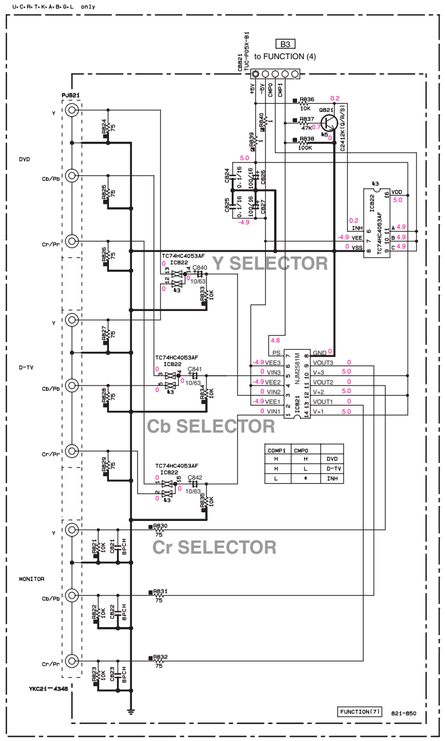

		J	U-C	R-T-K	A-L	B-G	
&16	R619	100K RD35810	X	X	100K RD35810	100K RD35810	Destination
&17	R621	100K RD35810	100K RD36810	X	X	X	
&18	R620	X	100K RD35810	100K RD35810	X	X	
&19	R622	X	X	100K RD35810	100K RD35810	100K RD35810	
&20	D604	UDZS6.8B VU17220	UDZS6.8B VU17220	UDZS6.2B VU17210	UDZS6.8B VU17220	UDZS6.8B VU17220	
&21	R606	22K RD35722	22K RD35722	15K RD35715	22K RD35722	22K RD35722	
&22	J601	0 RD35000	0 RD35000	0 RD35000	0 RD35000	X	
&23	IC803	X	X	X	X	LC72722 XY53440	
&24	XL602	X	X	X	X	4.332MHz V393090	
&25	C637-639	X	X	X	X	27PCH VA76110	
&26	C632-633	X	X	X	X	330P US06233	
&27	C636	X	X	X	X	560P US06256	
&28	C638 C631	X	X	X	X	0.1/16 US13510	
&29	C634-635-640	X	X	X	X	47/25 UR84747	
&30	R656	X	X	X	X	100 RD35510	
&31	R657-658	X	X	X	X	470 RD35647	
&32	R659-660	X	X	X	X	10K RD35710	
&33	R655	X	X	X	X	22K RD35722	
&34	L601	X	X	X	X	220uH VU88950	
&35	Q609	X	X	X	X	IC17402	
&36	R654	X	X	X	X	2.2K RD35622	
&37	R653	X	X	X	X	33K RD35733	
&38	R652	X	X	X	X	100K RD35810	
&44	R641	X	X	X	X	100K RD35810	
&45	SW801	X	X	PQ22WJB V362430	X	X	
&49	J802	o	o	X	o	o	
&50		X	X	o	X	X	
&57	W607	WF40412	X	X	X	X	RGS
&58	CB607	X	V782550 TUC-P05P-B1	V782550 TUC-P05P-B1	V782550 TUC-P05P-B1	V782550 TUC-P05P-B1	FUNCT(4)
&59							

x: NOT USED
O: USED / APPLICABLE

Note: IC821 LA7104M for P.W.B. A to D version.
NJM2581M for P.W.B. E or later version.

IC602: NJM78L05A-T3
Voltage Regulator



IC603: LC72722
RDS Decoder



IC801: LA7956
Video Switch



IC822: TC74HC4053AF
Analog Multiplexer/Demultiplexer



INPUT STATES				"ON" CHANNNEL (S)
INHIBIT	C	B	A	
0	0	0	0	0X, 0Y, 0Z
0	0	0	1	1X, 0Y, 0Z
0	0	1	0	0X, 1Y, 0Z
0	0	1	1	1X, 1Y, 0Z
0	1	0	0	0X, 0Y, 1Z
0	1	0	1	1X, 0Y, 1Z
0	1	1	0	0X, 1Y, 1Z
0	1	1	1	1X, 1Y, 1Z
1	X	X	X	NONE

IC821: LA7104M
Video Amp

Point ② Pin 13 of IC601



Point ③ Pin 12 of IC603



Point ④ Emitter of Q601 and collector of Q602



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠ 印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (OPERATION)

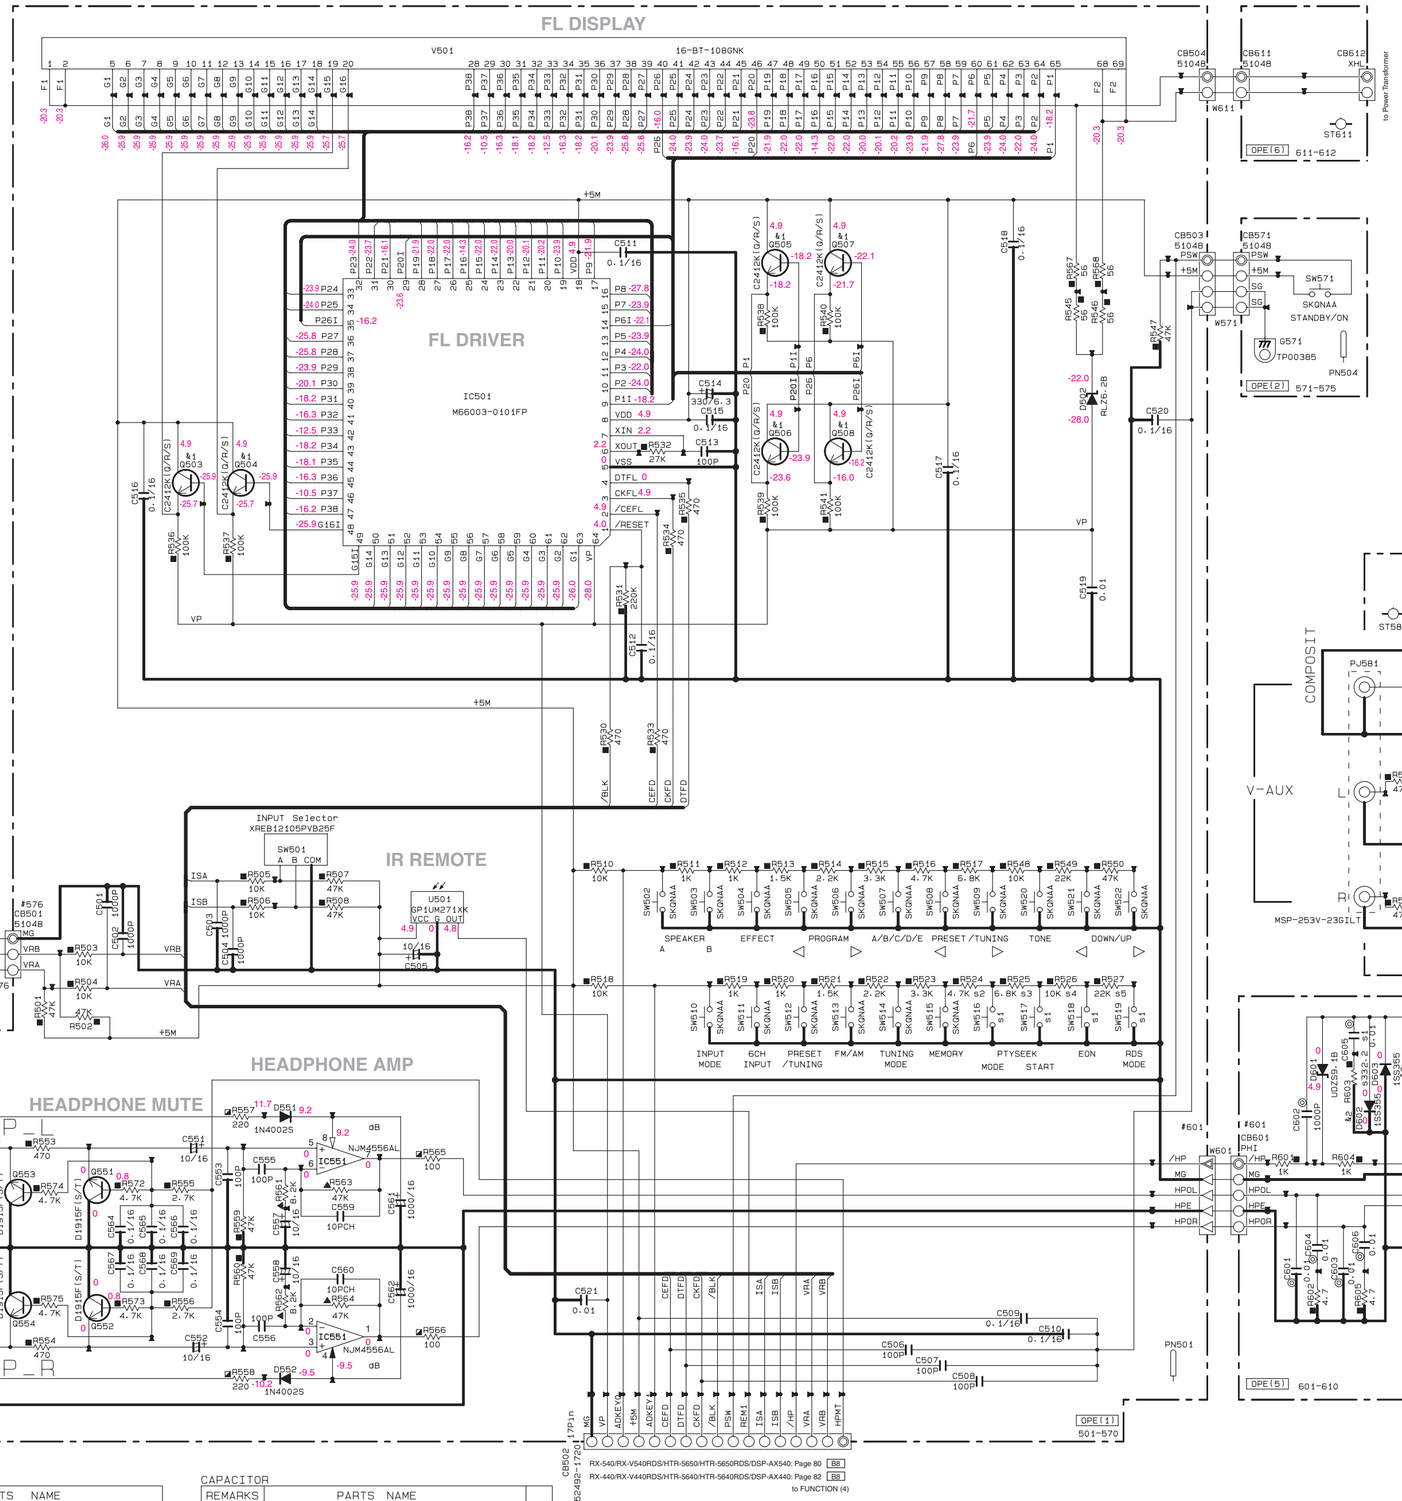

		J.U.C.R. T.K.A.L	B.G
s1	SW516-519	X	VV02030
s2	R524	X	RD35647
s3	R525	X	RD35668
s4	R526	X	RD35710
s5	R527	X	RD35722

x: NOT USED
O: USED / APPLICABLE

NOTICE (model)
(J)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(R)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
&1	Q503-508.583.584	2SC2412K[Q/R/S] 2SD601A[TX]Q/R/S
&2	D581-584.602.603	1SS355 MA111
&3	Q551-554	2SD1915F[S/T] 2SC2878[A/B]
&4		

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
◪	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
◬	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
▨	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	⏚
⊗	TANTALUM CAPACITOR	
NO MARK	CERAMIC CAPACITOR	⏚
◉	CERAMIC TUBULAR CAPACITOR	
◎	POLYESTER FILM CAPACITOR	
○	POLYSTYRENE FILM CAPACITOR	
Ⓘ	MICA CAPACITOR	
Ⓟ	POLYPROPYLENE FILM CAPACITOR	
ⓒ	SEMICONDUCTIVE CERAMIC CAPACITOR	
Ⓢ	POLYPHENYLENE SULFIDE FILM CAPACITOR	

IC501: M66003-0101FP
FL Display Driver

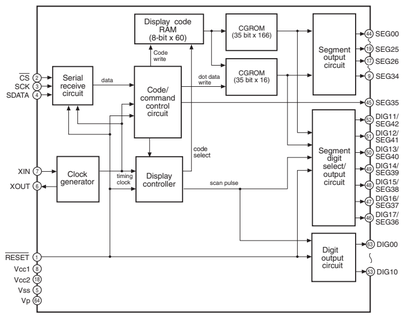

IC551: NJM4556AL
Dual OP-Amp



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (VIDEO)

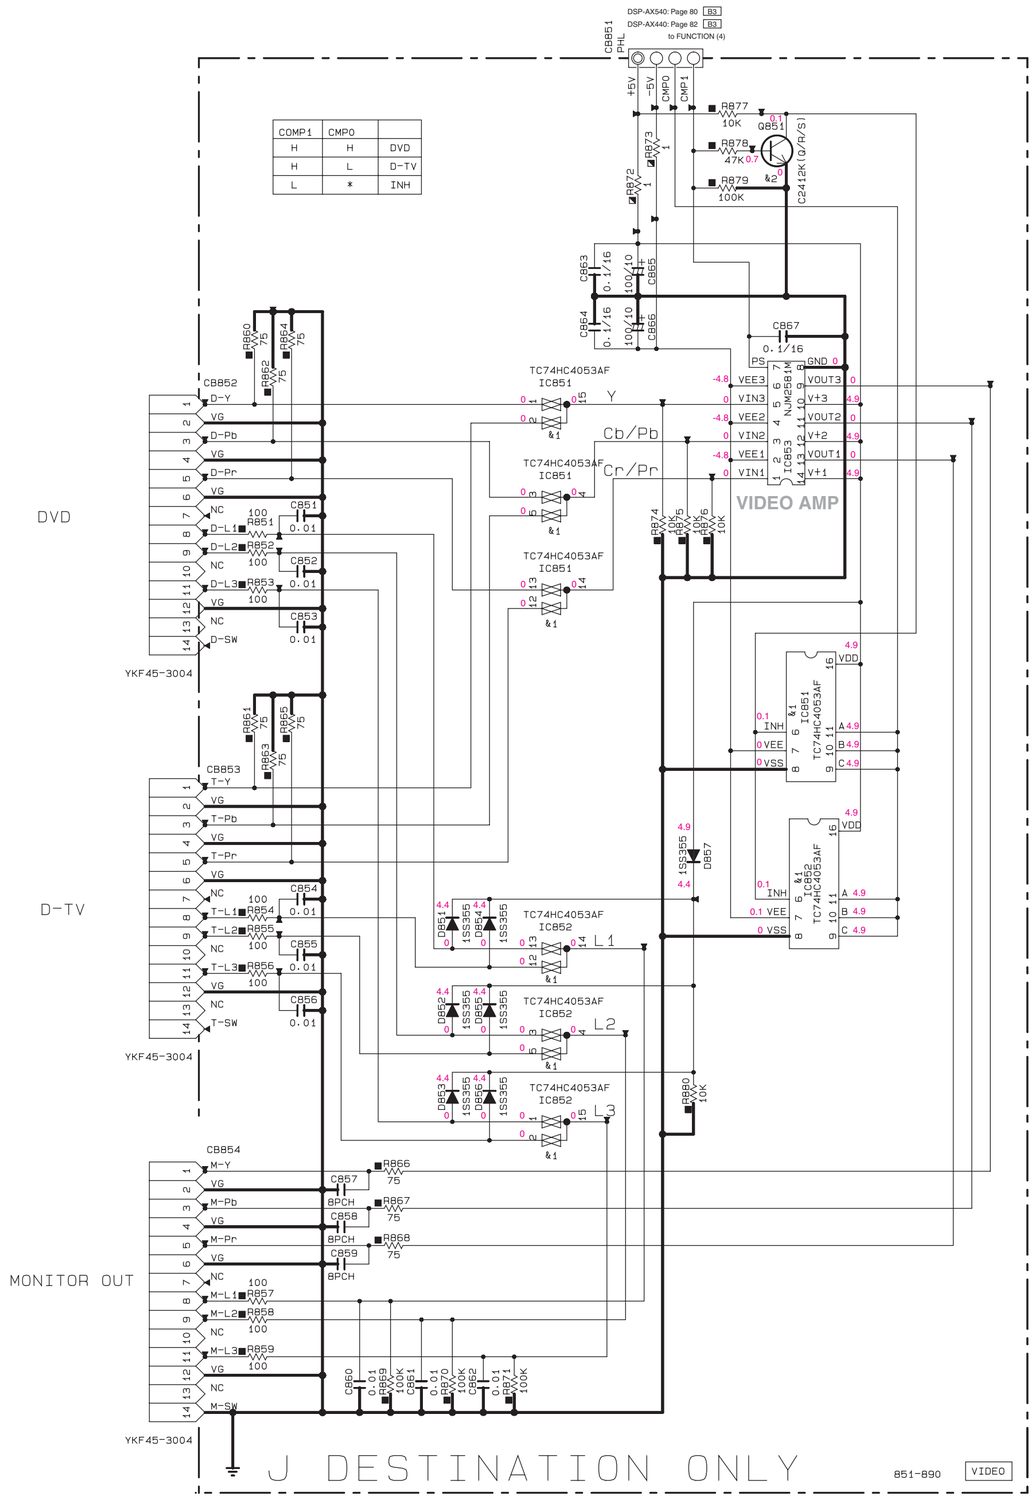

NOTICE (model)

(J)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(R)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
▨	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
▨	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
▤	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	⫼
⊗	TANTALUM CAPACITOR	
NO MARK	CERAMIC CAPACITOR	⫻
◉	CERAMIC TUBULAR CAPACITOR	
◎	POLYESTER FILM CAPACITOR	
○	POLYSTYRENE FILM CAPACITOR	
Ⓘ	MICA CAPACITOR	
Ⓟ	POLYPROPYLENE FILM CAPACITOR	
▩	SEMICONDUCTIVE CERAMIC CAPACITOR	

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
&1	IC851.852	TC74HC4053AF MM74HC4053SJX
&2	Q851	C2412K(Q/R/S) D601A(Q/R/S)

IC851, 852: TC74HC4053AF
Analog Multiplexer/Demultiplexer

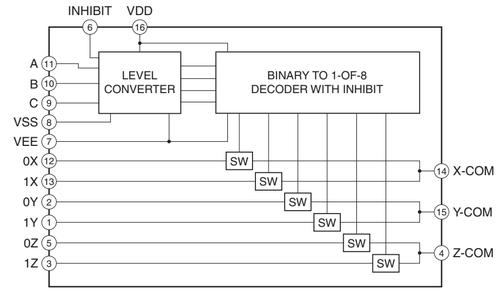

INPUT STATES				"ON" CHANNNEL (S)
INHIBIT	C	B	A	
0	0	0	0	0X, 0Y, 0Z
0	0	0	1	1X, 0Y, 0Z
0	0	1	0	0X, 1Y, 0Z
0	0	1	1	1X, 1Y, 0Z
0	1	0	0	0X, 0Y, 1Z
0	1	0	1	1X, 0Y, 1Z
0	1	1	0	0X, 1Y, 1Z
0	1	1	1	1X, 1Y, 1Z
1	X	X	X	NONE

IC853: NJM2581M
Video Amp



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (MAIN) RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

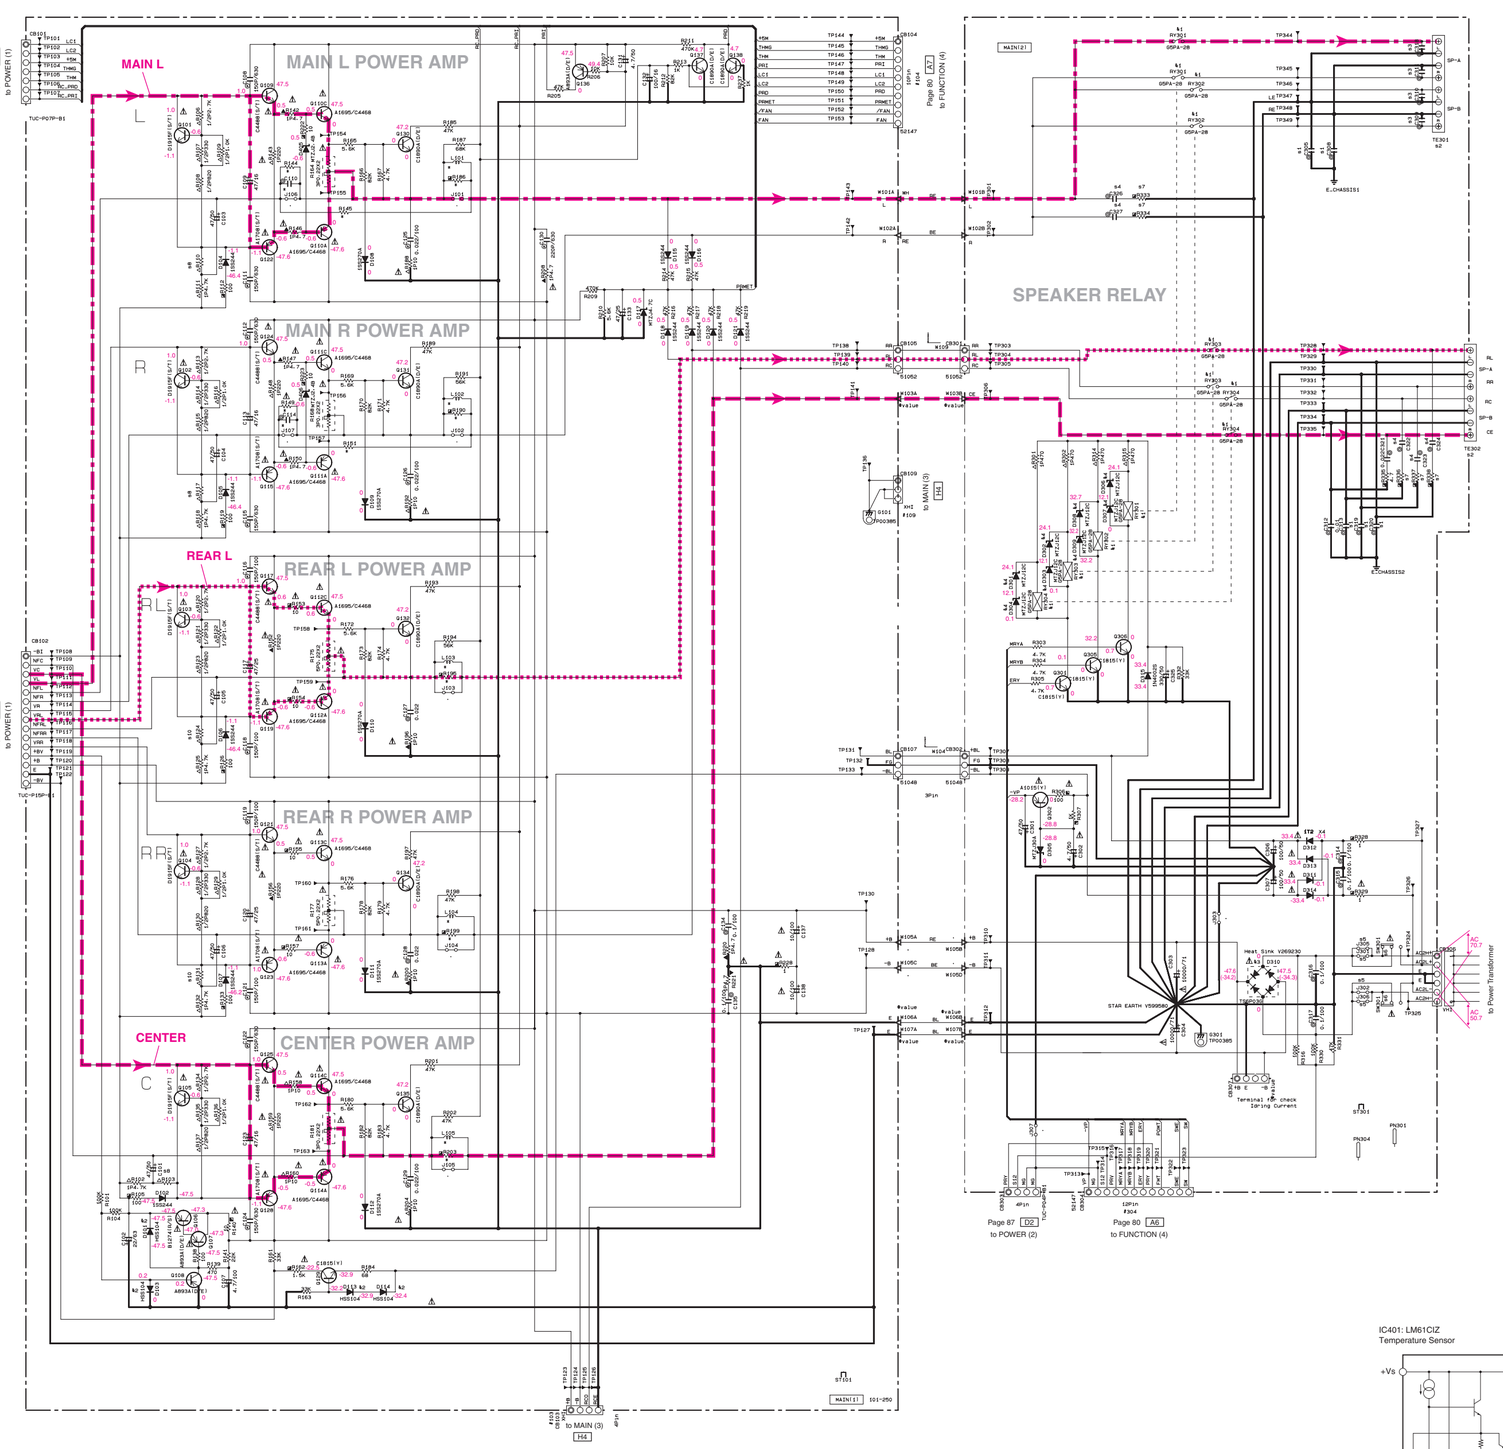

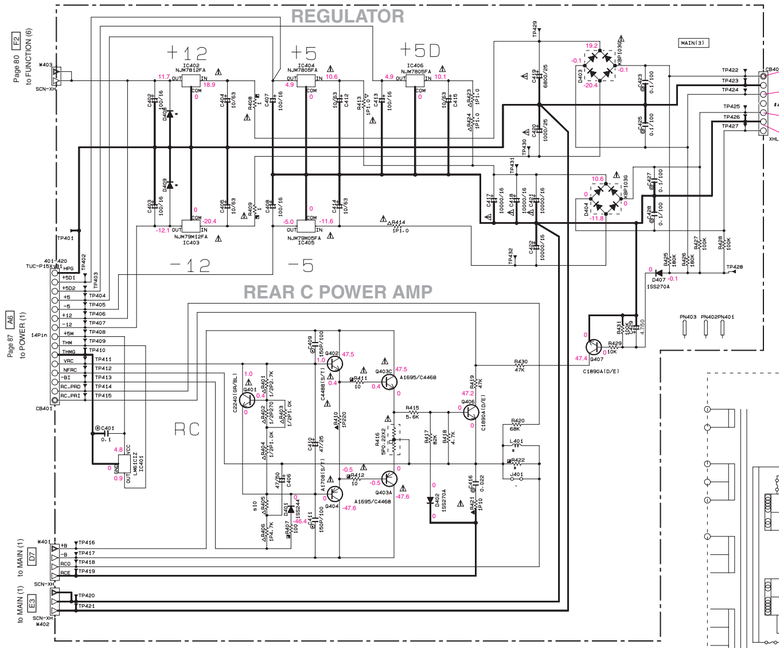

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
◇	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
◉	CERAMIC TUBULAR CAPACITOR
◎	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
ⓘ	MICA CAPACITOR
⊘	POLYPROPYLENE FILM CAPACITOR
◉	SEMICONDUCTIVE CERAMIC CAPACITOR
Ⓢ	POLYPHENYLENE SULFIDE FILM CAPACITOR

RESISTOR

REMARKS	PARTS NAME
▱	CARBON FILM RESISTOR (P=5)
▱	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
▲	METAL PLATE RESISTOR
◪	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

		J	U-C	R-T-A	K-B-D-L
s1	C305-308 313-319,320	X	X	0.01 UA65410	0.01 UA65410
s2	TE301-302	V677120	V677120	V677120	V591220
s3	C309-310-311 318	X	X	4700P UA65347	4700P UA65347
s4	C302-324-326 327	X	X	0.022 UA65422	0.022 UA65422
s5	J301-302-305 306	VN50000	X	X	X
s6	SW301	X	V410420	V410420	V410420
s7	R333-334 336-338	X	X	4.7 HV75347	4.7 HV75347
s8	R103-110-117 124-131-405	1P 4.7K VP94150	1P 5.6K VP94160	1P 4.7K VP94150	1P 4.7K VP94150
s9					
s10	R124,131,405	1P 4.7K V807200	1P 5.6K V807201	1P 4.7K V807200	1P 4.7K V807200

x: NOT USED
O: USED / APPLICABLE

NOTICE (model)
(J)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(R)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
k1	RY301-304	G5PA-2B DS24VDC-DS(M)
k2	D101-103-113-114	HSS104 1SS133 1SS176
k3	D310	TS6P030 DS5B20
k4	D301-304-306-309	WTZJ12C HZS12B2TD

IC401: LM61CIZ
Temperature Sensor



IC402: NJM7812FA
IC404, 406: NJM7805FA
Voltage Regulator



IC403: NJM79M12FA
IC405: NJM79M05FA
Voltage Regulator



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (MAIN)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

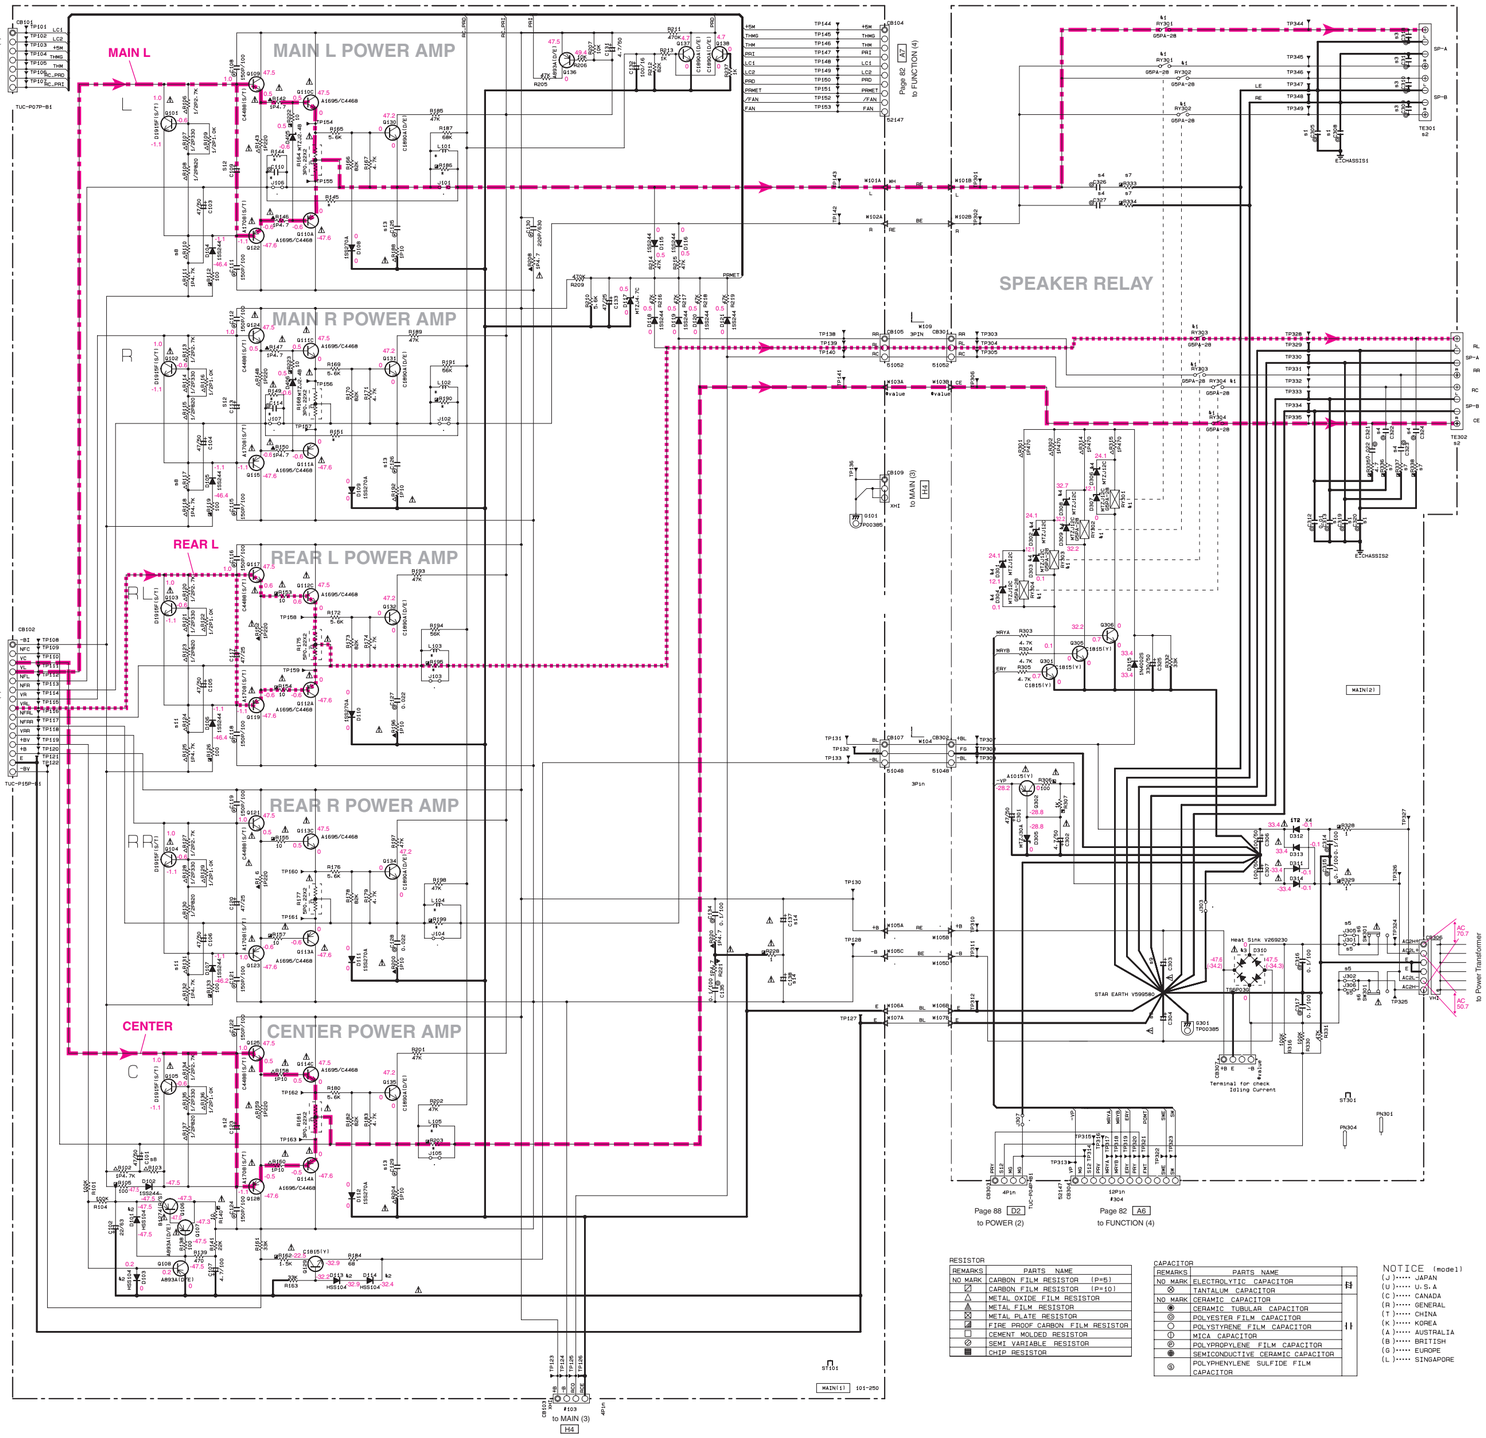

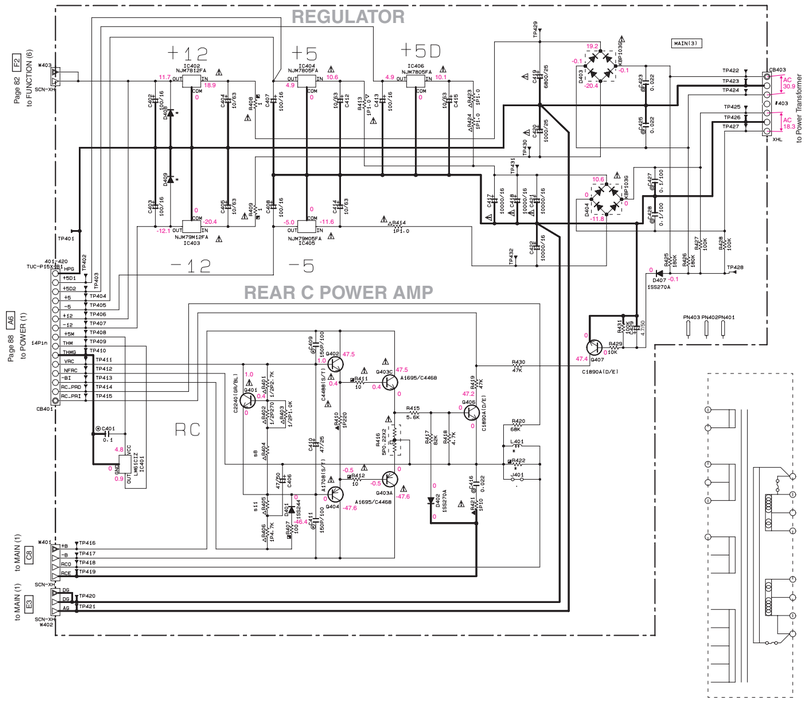

		J	U-C	R-T-A	K-B-O-L
s1	C505-508-313-319-320	X	X	0.01 UA65410	0.01 UA65410
s2	TE301-302	V677120	V677120	V677120	V591220
s3	C309-310-311 318	X	X	4700P UA65347	4700P UA65347
s4	C322-324-326 327	X	X	0.022 UA65422	0.022 UA65422
s5	J301-302-305 306	VN55000	X	X	X
s6	SW301	X	Y410420	Y410420	Y410420
s7	R333-334 336-338	X	X	4.7 HV75347	4.7 HV75347
s8	R103-110-117	1P 4.7K VP94150	1P 5.6K VP94160	1P 4.7K VP94150	1P 4.7K VP94150
s9	C303-304	B200/71 WB12720	B200/93 V492630	B200/93 V492630	B200/71 WB12720
s10					
s11	R124.131.405	1P 4.7K VB07200	1P 5.6K VB07210	1P 4.7K VB07200	1P 4.7K VB07200
s12	C109.113.123	47/16 UR33747	47/16 UR83747	47/16 UR83747	47/16 UR33747
s13	C125.126.129	0.020/100 VR32470	0.022 UA35422	0.022 UA35422	0.020/100 VR32470
s14	C137.138	10/100 UR39710	10/100 UR89710	10/100 UR89710	10/100 UR39710

x: NOT USED
O: USED / APPLICABLE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name	
k1	RY301-304	GSPA-28	DSZ402-DS1W1
k2	D101.103.113.114	HS5104	
		1SS133	
		1SS176	
k3	D310	TS6P03G	
		DS5B20	
k4	D301-304.306-309	MTZJ12C	
		HZS12B2TD	

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
☑	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
◪	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
⊗	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
◉	CERAMIC TUBULAR CAPACITOR
◎	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
ⓘ	MICA CAPACITOR
ⓟ	POLYPROPYLENE FILM CAPACITOR
ⓒ	SEMICONDUCTIVE CERAMIC CAPACITOR
ⓢ	POLYPHENYLENE SULFIDE FILM CAPACITOR

NOTICE (model)
(J)..... JAPAN
(U)..... U.S.A
(C)..... CANADA
(R)..... GENERAL
(T)..... CHINA
(K)..... KOREA
(A)..... AUSTRALIA
(B)..... BRITISH
(G)..... EUROPE
(L)..... SINGAPORE

IC401: LM61CIZ
Temperature Sensor



IC402: NJM7812FA
IC404, 406: NJM7805FA
Voltage Regulator



IC403: NJM79M12FA
IC405: NJM79M05FA
Voltage Regulator



★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ! and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ! 印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (POWER) RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

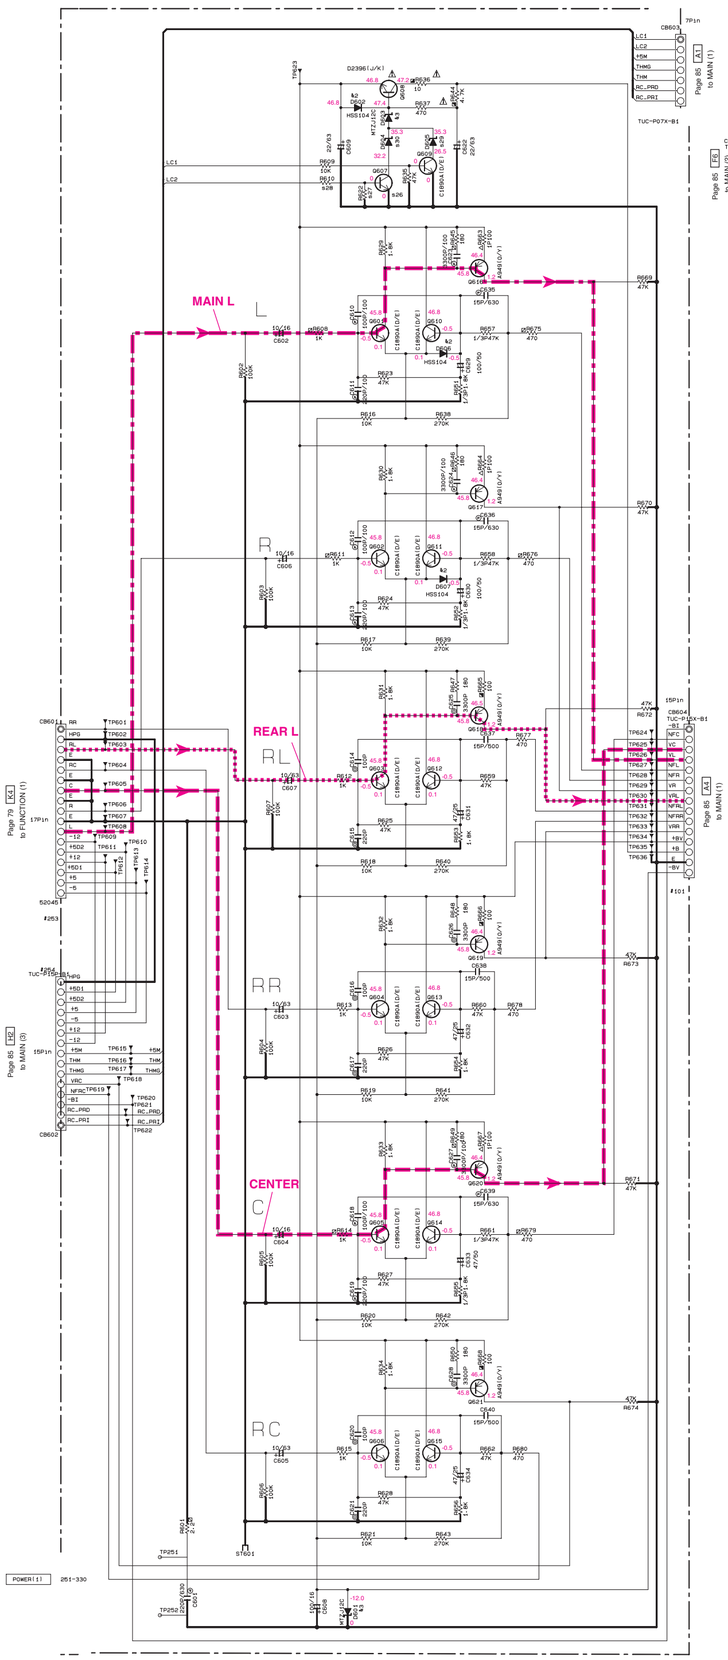

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
☒	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
☒	METAL PLATE RESISTOR
◪	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
◇	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
◉	CERAMIC TUBULAR CAPACITOR
◎	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
Ⓜ	MICA CAPACITOR
Ⓟ	POLYPROPYLENE FILM CAPACITOR
◉	SEMICONDUCTIVE CERAMIC CAPACITOR
Ⓢ	POLYPHENYLENE SULFIDE FILM CAPACITOR

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
¶1	RY701	SDT-S-112LMR DS1201-01W111 ALK5321
¶2	D602.606.607.701.702	HSS104 1SS133 1SS176
¶3	D601.603.605	MTZJ12C HZS12B2TD

NOTICE (model)
(J)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(R)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

		J	U·C	R·T·K	A	B	G·L
s1	J701	VN50000	VN50000	X	VN50000	VN50000	VN50000
s2	Q702·704	X	X	D2396[J/K] VR51080	X	X	X
s3	D706	X	X	1N4002S VV30770	X	X	X
s4	D702	X	X	HSS104 VD63160	X	X	X
s5	D703	X	X	MTZJ13A VG44040	X	X	X
s6	C703	X	X	10/100 URB8710	X	X	X
s7	T701	XW605	XW605	XW974	XW608	XW608	XW608
s8	TE701	VU54310	VU54310	VS86740	VT91500	VU54330	VU54340
s9	J702	VN50000	X	VN50000	VN50000	VN50000	X
s10	CB702·703	X	VP20650	X	X	X	VP20650
s11	F701	X	VS82330	X	X	X	VT94290
s12	CB946	X	X	V937790	X	X	X
s13	CB945	X	X	V937780	X	X	X
s14	W901	X	X	WA76540	X	X	X
s15	CB941·942	X	X	VP20650	X	X	X
s16	SW941	X	X	V718230	X	X	X
s17	R705	X	1/2P2.2M VE73000	X	X	X	X
s18	C702	X	X	10/25 URB6710	X	X	X
s19	Q703	X	X	K2461[Y] IE10262	X	X	X
s20	F941	X	X	KB00079	X	X	X
s21	F702	VS82330	VS82330	VS82330 R-K WB50710 T	KB00079	KB00079	KB00079
s22	C704	X	X	10/50 URB6710	X	X	X
s23	R702·704	X	X	100 HF45510	X	X	X
s24	C705	0.01/100 VLB8460	0.01/100 VLB8460	X	0.01/100 VLB8460	0.01/100 VLB8460	0.01/100 VLB8460
s25	C706·707	X	X	0.01 UA65410	X	X	X
s26	Q607	X	C1890A[D/E] VP88310	C1890A[D/E] VP88310	C1890A[D/E] VP88310	C1890A[D/E] VP88310	C1890A[D/E] VP88310
s27	R622	X	47K HF45747	47K HF45747	47K HF45747	47K HF45747	47K HF45747
s28	R610	X	10K HF45710	10K HF45710	10K HF45710	10K HF45710	10K HF45710
s29	D605	MTZJ9.1B VG43920	MTZJ12C VG44030	MTZJ12C VG44030	MTZJ12C VG44030	MTZJ12C VG44030	MTZJ12C VG44030
s30	D604	X	MTZJ5.1C VG43750	MTZJ5.1C VG43750	MTZJ5.1C VG43750	MTZJ5.1C VG43750	MTZJ5.1C VG43750
s31	R703	X	X	10K HF45710	X	X	X
s32							
s33							
s34							
s35							

x: NOT USED
O: USED / APPLICABLE

★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

■ SCHEMATIC DIAGRAM (POWER)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

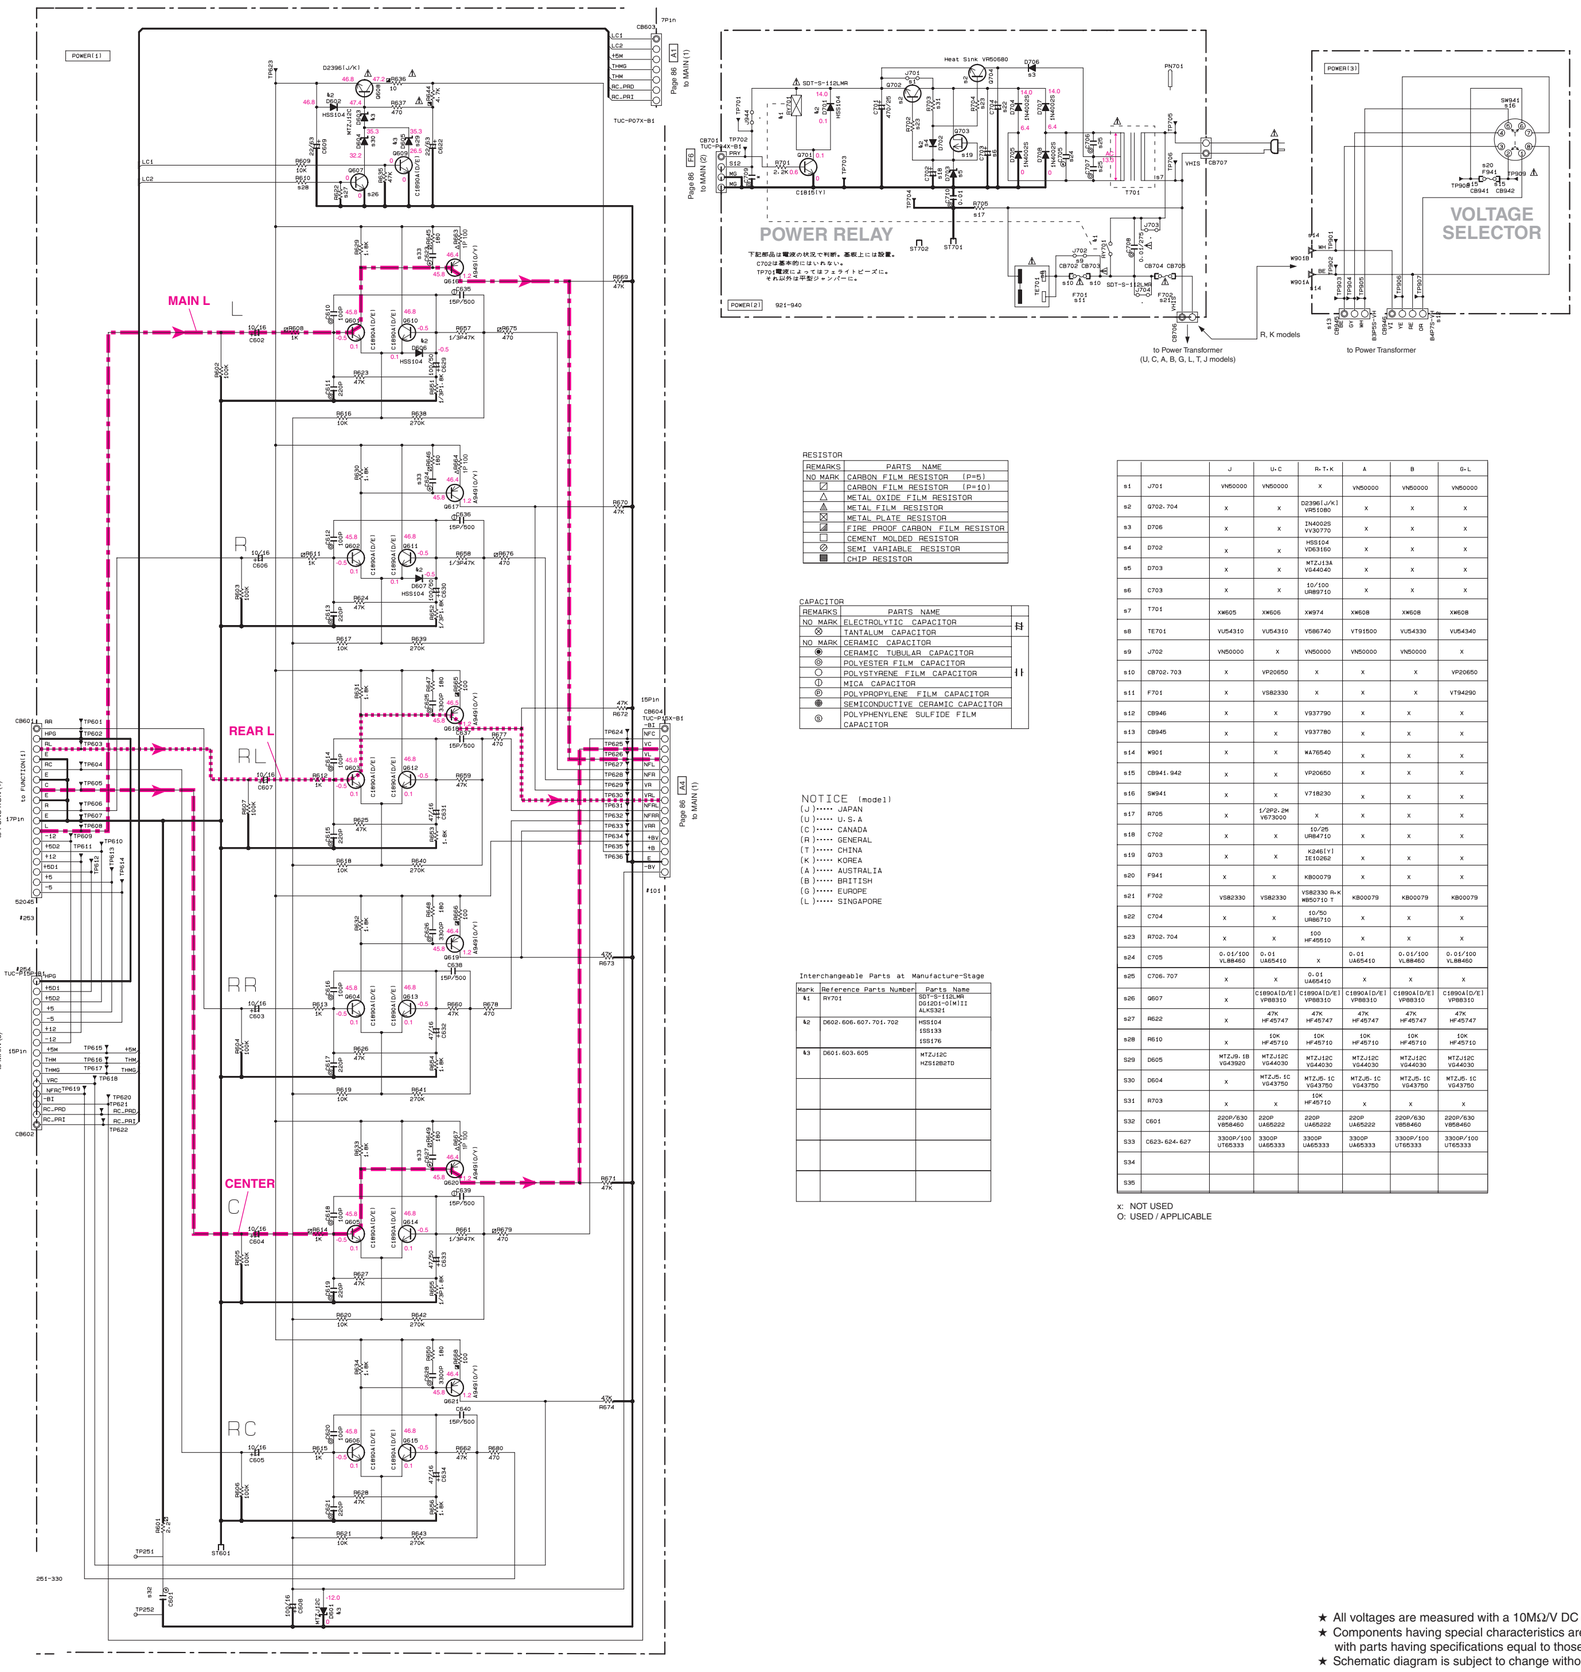

RESISTOR

REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
⊘	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
⚠	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
◪	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊘	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	⫷
⊘	TANTALUM CAPACITOR	⫷
NO MARK	CERAMIC CAPACITOR	⫸
◉	CERAMIC TUBULAR CAPACITOR	⫸
◎	POLYESTER FILM CAPACITOR	⫸
○	POLYSTYRENE FILM CAPACITOR	⫸
Ⓘ	MICA CAPACITOR	⫸
Ⓟ	POLYPROPYLENE FILM CAPACITOR	⫸
◉	SEMICONDUCTIVE CERAMIC CAPACITOR	⫸
Ⓖ	POLYPHENYLENE SULFIDE FILM CAPACITOR	⫸

NOTICE (model)
(J)····· JAPAN
(U)····· U.S.A
(C)····· CANADA
(A)····· GENERAL
(T)····· CHINA
(K)····· KOREA
(A)····· AUSTRALIA
(B)····· BRITISH
(G)····· EUROPE
(L)····· SINGAPORE

Interchangeable Parts at Manufacture-Stage

Mark	Reference Parts Number	Parts Name
※1	RY701	SDT-S-112LMR DS12DI-01MIII ALK5301
※2	D602.606.607.701.702	HSS104 1SS133 1SS176
※3	D601.603.605	MTZJ12C HZS12B2TD

		J	U·C	R·T·K	A	B	G·L
※1	J701	VN50000	VN50000	X	VN50000	VN50000	VN50000
※2	Q702·704	X	X	D2396(J/K) VR51080	X	X	X
※3	D706	X	X	IN4002S VV30770	X	X	X
※4	D702	X	X	HSS104 V063160	X	X	X
※5	D703	X	X	MTZJ13A VG44040	X	X	X
※6	C703	X	X	10/100 URB8710	X	X	X
※7	T701	XW605	XW606	XW974	XW608	XW608	XW608
※8	TE701	VU54310	VU54310	V586740	VT91500	VU54330	VU54340
※9	J702	VN50000	X	VN50000	VN50000	VN50000	X
※10	CB702·703	X	VP20650	X	X	X	VP20650
※11	F701	X	VS82330	X	X	X	VT94290
※12	CB946	X	X	V937790	X	X	X
※13	CB945	X	X	V937780	X	X	X
※14	W901	X	X	WA76540	X	X	X
※15	CB941·942	X	X	VP20650	X	X	X
※16	SW941	X	X	V718230	X	X	X
※17	R705	X	1/2P2.2M V673000	X	X	X	X
※18	C702	X	X	10/25 URB4710	X	X	X
※19	Q703	X	X	K246[Y] IE10262	X	X	X
※20	F941	X	X	KB00079	X	X	X
※21	F702	VS82330	VS82330	VS82330 R-K W85071O T	KB00079	KB00079	KB00079
※22	C704	X	X	10/50 URB6710	X	X	X
※23	R702·704	X	X	100 HF45510	X	X	X
※24	C705	0.01/100 VL88460	0.01 UA65410	X	0.01 UA65410	0.01/100 VL88460	0.01/100 VL88460
※25	C706·707	X	X	0.01 UA65410	X	X	X
※26	Q607	X	C1890A[D/E] VP88310	C1890A[D/E] VP88310	C1890A[D/E] VP88310	C1890A[D/E] VP88310	C1890A[D/E] VP88310
※27	R622	X	47K HF45747	47K HF45747	47K HF45747	47K HF45747	47K HF45747
※28	R610	X	10K HF45710	10K HF45710	10K HF45710	10K HF45710	10K HF45710
※29	D605	MTZJ9.1B VG43920	MTZJ12C VG44030	MTZJ12C VG44030	MTZJ12C VG44030	MTZJ12C VG44030	MTZJ12C VG44030
※30	D604	X	MTZJ5.1C VG43750	MTZJ5.1C VG43750	MTZJ5.1C VG43750	MTZJ5.1C VG43750	MTZJ5.1C VG43750
※31	R703	X	X	10K HF45710	X	X	X
※32	C601	220P/630 V858460	220P UA65222	220P UA65222	220P UA65222	220P/630 V858460	220P/630 V858460
※33	C623·624·627	3300P/100 U765333	3300P UA65333	3300P UA65333	3300P UA65333	3300P/100 U765333	3300P/100 U765333
※34							
※35							

x: NOT USED
O: USED / APPLICABLE

★ All voltages are measured with a 10MΩ/V DC electric volt meter.
★ Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
★ Schematic diagram is subject to change without notice.

● 電圧は、内部抵抗10MΩの電圧計で測定したものです。
● ⚠印のある部品は、安全性確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
● 本回路図は標準回路図です。改良のため予告なく変更することがございます。

PARTS LIST

■ ELECTRICAL PARTS

■ WARNING

- Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.

●⚠印のある部分は、安全確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
●部品価格ランクは、予告なく変更することがあります。

ABBREVIATIONS IN THIS LIST ARE AS FOLLOWS:

C.A.EL.CHP	: CHIP ALUMI.ELECTROLYTIC CAP
C.CE	: CERAMIC CAP
C.CE.ARRAY	: CERAMIC CAP ARRAY
C.CE.CHP	: CHIP CERAMIC CAP
C.CE.ML	: MULTILAYER CERAMIC CAP
C.CE.M.CHP	: CHIP MULTILAYER CERAMIC CAP
C.CE.SAFTY	: RECOGNIZED CERAMIC CAP
C.CE.TUBLR	: CERAMIC TUBULAR CAP
C.CE.SMI	: SEMI CONDUCTIVE CERAMIC CAP
C.EL	: ELECTROLYTIC CAP
C.MICA	: MICA CAP
C.ML.FLM	: MULTILAYER FILM CAP
C.MP	: METALLIZED PAPER CAP
C.MYLAR	: MYLAR FILM CAP
C.MYLAR.ML	: MULTILAYER MYLAR FILM CAP
C.PAPER	: PAPER CAPACITOR
C.PLS	: POLYSTYRENE FILM CAP
C.POL	: POLYESTER FILM CAP
C.POLY	: POLYETHYLENE FILM CAP
C.PP	: POLYPROPYLENE FILM CAP
C.TNTL	: TANTALUM CAP
C.TNTL.CHP	: CHIP TANTALUM CAP
C.TRIM	: TRIMMER CAP
CN	: CONNECTOR
CN.BS.PIN	: CONNECTOR,BASE PIN
CN.CANNON	: CONNECTOR,CANNON
CN.DIN	: CONNECTOR,DIN
CN.FLAT	: CONNECTOR,FLAT CABLE
CN.POST	: CONNECTOR,BASE POST
COIL.MX.AM	: COIL,AM MIX
COIL.AT.FM	: COIL,FM ANTENNA
COIL.DT.FM	: COIL,FM DETECT
COIL.MX.FM	: COIL,FM MIX
COIL,OUTPT	: OUTPUT COIL
DIOD.ARRAY	: DIODE ARRAY
DIODE.BRG	: DIODE BRIDGE
DIODE.CHP	: CHIP DIODE
DIODE.VAR	: VARACTOR DIODE
DIOD.Z.CHP	: CHIP ZENER DIODE
DIODE.ZENR	: ZENER DIODE
DSCR.CE	: CERAMIC DISCRIMINATOR
FER.BEAD	: FERRITE BEADS
FER.CORE	: FERRITE CORE
FET.CHP	: CHIP FET
FL.DSPLY	: FLUORESCENT DISPLAY
FLTR.CE	: CERAMIC FILTER
FLTR.COMB	: COMB FILTER MODULE
FLTR.LC.RF	: LC FILTER,EMI
GND.MTL	: GROUND PLATE
GND.TERM	: GROUND TERMINAL
HOLDER.FUS	: FUSE HOLDER
IC.PRTCT	: IC PROTECTOR
JUMPER.CN	: JUMPER CONNECTOR
JUMPER.TST	: JUMPER,TEST POINT
L.DTCT	: LIGHT DETECTING MODULE
L.EMIT	: LIGHT EMITTING MODULE
LED.DSPLY	: LED DISPLAY
LED.INFRD	: LED,INFRARED
MODUL.RF	: MODULATOR,RF
PHOT.CPL	: PHOTO COUPLER
PHOT.INTR	: PHOTO INTERRUPTER
PHOT.RFLCT	: PHOTO REFLECTOR
PIN.TEST	: PIN,TEST POINT
PLST.RIVET	: PLASTIC RIVET
R.ARRAY	: RESISTOR ARRAY
R.CAR.	: CARBON RESISTOR
R.CAR.CHP	: CHIP RESISTOR
R.CAR.FP	: FLAME PROOF CARBON RESISTOR
R.FUS	: FUSABLE RESISTOR
R.MTL.CHP	: CHIP METAL FILM RESISTOR
R.MTL.FLM	: METAL FILM RESISTOR
R.MTL.OXD	: METAL OXIDE FILM RESISTOR
R.MTL.PLAT	: METAL PLATE RESISTOR
RSNR.CE	: CERAMIC RESONATOR
RSNR.CRYS	: CRYSTAL RESONATOR
R.TW.CEM	: TWIN CEMENT FIXED RESISTOR
R.WW	: WIRE WOUND RESISTOR
SCR.BND.HD	: BIND HEAD B-TITE SCREW
SCR.BW.HD	: BW HEAD TAPPING SCREW
SCR.CUP	: CUP TITE SCREW
SCR.TERM	: SCREW TERMINAL
SCR.TR	: SCREW,TRANSISTOR
SUPRT.PCB	: SUPPORT,P.C.B.
SURG.PRTCT	: SURGE PROTECTOR
SW.TACT	: TACT SWITCH
SW.LEAF	: LEAF SWITCH
SW.LEVER	: LEVER SWITCH
SW.MICRO	: MICRO SWITCH
SW.PUSH	: PUSH SWITCH
SW.RT.ENC	: ROTARY ENCODER
SW.RT.MTR	: ROTARY SWITCH WITH MOTOR
SW.RT	: ROTARY SWITCH
SW.SLIDE	: SLIDE SWITCH
TERM.SP	: SPEAKER TERMINAL
TERM.WRAP	: WRAPPING TERMINAL
THRMST.CHP	: CHIP THERMISTOR
TR.CHP	: CHIP TRANSISTOR
TR.DGT	: DIGITAL TRANSISTOR
TR.DGT.CHP	: CHIP DIGITAL TRANSISTOR
TRANS	: TRANSFORMER
TRANS.PULS	: PULSE TRANSFORMER
TRANS.PWR	: POWER TRANSFORMER ASS'Y
TUNER.AM	: TUNER PACK,AM
TUNER.FM	: TUNER PACK,FM
TUNER.PK	: FRONT-ENDTUNER PACK
VR	: ROTARY POTENTIOMETER
VR.MTR	: POTENTIOMETER WITH MOTOR
VR.SW	: POTENTIOMETER WITH ROTARY SW
VR.SLIDE	: SLIDE POTENTIOMETER
VR.TRIM	: TRIMMER POTENTIOMETER

Note) Those parts marked with "#" are not included in the P.C.B. ass'y.

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. DSP

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*		WA704200	P.C.B.	DSP	540,5650	J	ＰＣＢ　ＤＳＰ	
*		WA704300	P.C.B.	DSP	540,5650	UCRTKABGL	ＰＣＢ　ＤＳＰ	
	CB602	VF982300	CN.BS.PIN	17P	540,5650		ＦＦＣコネクター	01
	CB603	VF982300	CN.BS.PIN	17P	540,5650		ＦＦＣコネクター	01
	C601	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C602	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C603	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C604	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C605	US061220	C.CE.M.CHP	22pF 50V	540,5650		チップセラコン	01
	C606	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C607	UR847220	C.EL	22uF 25V	540,5650		ケミコン	01
	C608	UR818100	C.EL	100uF 6.3V	540,5650	J	ケミコン	01
	C609	US135100	C.CE.CHP	0.1uF 16V	540,5650	J	チップセラコン	01
	C610	UR819100	C.EL	1000uF 6.3V	540,5650		ケミコン	01
	C611	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C612	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C613	US061100	C.CE.M.CHP	10pF 50V	540,5650		チップセラコン	01
	C614	US135100	C.CE.CHP	0.1uF 16V	540,5650	J	チップセラコン	01
	C615	UR818100	C.EL	100uF 6.3V	540,5650	J	ケミコン	01
	C616	US062220	C.CE.CHP	220pF 50V	540,5650		チップセラコン	01
	C617	US063100	C.CE.M.CHP	1000pF 50V	540,5650		チップセラコン	01
	C618	US044220	C.CE.M.CHP	0.022uF 25V	540,5650		チップセラコン	01
	C619	UR818100	C.EL	100uF 6.3V	540,5650	J	ケミコン	01
	C620	UR818100	C.EL	100uF 6.3V	540,5650	J	ケミコン	01
	C621	US061330	C.CE.M.CHP	33pF 50V	540,5650		チップセラコン	01
	C622	US135100	C.CE.CHP	0.1uF 16V	540,5650	J	チップセラコン	01
	C623	US062100	C.CE.M.CHP	100pF 50V	540,5650	J	チップセラコン	01
	C624	US135100	C.CE.CHP	0.1uF 16V	540,5650	J	チップセラコン	01
	C625	UR819100	C.EL	1000uF 6.3V	540,5650		ケミコン	01
	C626	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C627	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C628	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C629	US063100	C.CE.M.CHP	1000pF 50V	540,5650		チップセラコン	01
	C630	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C631	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C632	US061100	C.CE.M.CHP	10pF 50V	540,5650		チップセラコン	01
	C633	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C634	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C635	UR819100	C.EL	1000uF 6.3V	540,5650		ケミコン	01
	C636	UR818100	C.EL	100uF 6.3V	540,5650	J	ケミコン	01
	C637	UR819100	C.EL	1000uF 6.3V	540,5650		ケミコン	01
	C638	US135100	C.CE.CHP	0.1uF 16V	540,5650	J	チップセラコン	01
	C639	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C640	UR818100	C.EL	100uF 6.3V	540,5650		ケミコン	01
	C641	UR819100	C.EL	1000uF 6.3V	540,5650		ケミコン	01
	C642	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C643	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C644	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C645	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C646	UR818470	C.EL	470uF 6.3V	540,5650		ケミコン	01
	C647	UR818100	C.EL	100uF 6.3V	540,5650		ケミコン	01
	C648	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C649	US061180	C.CE.CHP	18pF 50V	540,5650		チップセラコン	01

＊New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. DSP

Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
C650	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C651	US061180	C.CE.CHP	18pF	50V	540,5650		チップセラコン	01
C653	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C654	UR818470	C.EL	470uF	6.3V	540,5650		ケミコン	01
C655	US062470	C.CE.M.CHP	470pF	50V	540,5650		チップセラコン	01
C656	US135100	C.CE.CHP	0.1uF	16V	540,5650	J	チップセラコン	01
C657	UR818100	C.EL	100uF	6.3V	540,5650	J	ケミコン	01
C658	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C659	US135100	C.CE.CHP	0.1uF	16V	540,5650	J	チップセラコン	01
C660	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C661	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C662	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C663	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C664	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C665	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C666	UR818100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C667	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C668	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C669	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C670	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C672	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C673	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C674	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C675	US063470	C.CE.CHP	4700pF	50V	540,5650		チップセラコン	01
C676	US135100	C.CE.CHP	0.1uF	16V	540,5650	J	チップセラコン	01
C677	US135100	C.CE.CHP	0.1uF	16V	540,5650	J	チップセラコン	01
C678	UR818100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C679	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C680	UR818100	C.EL	100uF	6.3V	540,5650	J	ケミコン	01
C681	UR818100	C.EL	100uF	6.3V	540,5650	J	ケミコン	01
C682	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C683	US063470	C.CE.CHP	4700pF	50V	540,5650		チップセラコン	01
C684	UR818100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C685	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C686	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C687	US135100	C.CE.CHP	0.1uF	16V	540,5650	UCRTKABGL	チップセラコン	01
C688	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C689	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C690	UR817470	C.EL	47uF	6.3V	540,5650		ケミコン	01
C691	UR866220	C.EL	2.2uF	50V	540,5650		ケミコン	01
C692	UR818100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C693	UR818100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C694	UR818100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C695	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C696	UR819100	C.EL	1000uF	6.3V	540,5650		ケミコン	01
C697	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C698	US064100	C.CE.M.CHP	0.01uF	50V	540,5650		チップセラコン	01
C699	US062470	C.CE.M.CHP	470pF	50V	540,5650		チップセラコン	01
C700	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C701	UR819100	C.EL	1000uF	6.3V	540,5650	UCRTKABGL	ケミコン	01
C702	US135100	C.CE.CHP	0.1uF	16V	540,5650	UCRTKABGL	チップセラコン	01
C703	UR818100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C704	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. DSP

Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
C705	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C707	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C708	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C709	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C710	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C711	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C712	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C713	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C715	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C716	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C717	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01
C718	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C719	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C721	US135100	C.CE.CHP	0.1uF	16V	540,5650	UCRTKABGL	チップセラコン	01
C722	UU118100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C723	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C724	UU118100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C725	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C726	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C727	UU118220	C.EL	220uF	6.3V	540,5650		ケミコン	01
C728	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C729	UU118100	C.EL	100uF	6.3V	540,5650		ケミコン	01
C730	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C739	UU137100	C.EL	10uF	16V	540,5650		ケミコン	01
C740	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C741	UU137100	C.EL	10uF	16V	540,5650		ケミコン	01
C742	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C743	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C744	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C745	UU137100	C.EL	10uF	16V	540,5650		ケミコン	01
C748	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C749	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C752	UA652680	C.MYLAR	680pF	50V	540,5650		マイラーコン	01
C753	UA652680	C.MYLAR	680pF	50V	540,5650		マイラーコン	01
C754	UA652680	C.MYLAR	680pF	50V	540,5650		マイラーコン	01
C755	UA652680	C.MYLAR	680pF	50V	540,5650		マイラーコン	01
C756	UA652470	C.MYLAR	470pF	50V	540,5650		マイラーコン	01
C757	UA652470	C.MYLAR	470pF	50V	540,5650		マイラーコン	01
C758	UA653390	C.MYLAR	3900pF	50V	540,5650		マイラーコン	01
C761	UR337100	C.EL	10uF	16V	540,5650		ケミコン　ＡＳＦ	03
C762	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C763	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C764	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C765	UR337100	C.EL	10uF	16V	540,5650		ケミコン　ＡＳＦ	03
C766	UR337100	C.EL	10uF	16V	540,5650		ケミコン　ＡＳＦ	03
C767	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C768	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C769	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C770	UR337470	C.EL	47uF	16V	540,5650		ケミコン　ＡＳＦ	03
C771	UR337470	C.EL	47uF	16V	540,5650		ケミコン　ＡＳＦ	03
C772	UR337470	C.EL	47uF	16V	540,5650		ケミコン　ＡＳＦ	03
C773	UR337470	C.EL	47uF	16V	540,5650		ケミコン　ＡＳＦ	03
C776	US061470	C.CE.M.CHP	47pF	50V	540,5650		チップセラコン	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. DSP

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	C778	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C779	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C780	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C781	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C790	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C791	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C792	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C793	UA654470	C.MYLAR	0.047uF 50V	540,5650		マイラーコン	01
	C794	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C795	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	C796	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
	D601	VT332900	DIODE	1SS355	540,5650		ダイオード	01
	D602	VT332900	DIODE	1SS355	540,5650		ダイオード	01
	D603	VV220700	DIODE.SHOT	RB501V-40	540,5650		ショットキーダイオード	01
	D604	VV220700	DIODE.SHOT	RB501V-40	540,5650		ショットキーダイオード	01
	D605	VT332900	DIODE	1SS355	540,5650		ダイオード	01
	D606	VT332900	DIODE	1SS355	540,5650		ダイオード	01
	D607	VT332900	DIODE	1SS355	540,5650		ダイオード	01
	D608	VT332900	DIODE	1SS355	540,5650		ダイオード	01
	D609	VV220700	DIODE.SHOT	RB501V-40	540,5650		ショットキーダイオード	01
	D610	VV220700	DIODE.SHOT	RB501V-40	540,5650		ショットキーダイオード	01
	D611	VV220700	DIODE.SHOT	RB501V-40	540,5650		ショットキーダイオード	01
	D612	VV220700	DIODE.SHOT	RB501V-40	540,5650		ショットキーダイオード	01
	IC601	X0238B00	IC	YSS938	540,5650		ＩＣ	13
	IC602	XV077B00	IC	MSM514260E-60JS	540,5650		メモリＩＣ ４Ｍ	07
	IC603	XZ003A00	IC	PQ025EZ5MZP 2.5V	540,5650		電源ＩＣ ＱＦＰ	03
	IC604	XU965A00	IC	uPC29M33T-E1 3.3V	540,5650		電源ＩＣ	03
*	IC605	X3820A00	IC	AK4529VQ	540,5650		ＩＣ	
	IC607	X3473A00	IC	CS493292-CLR	540,5650	J	ＩＣ	15
*	IC607	X3939A00	IC	CS493264-CL	540,5650	UCRTKABGL	ＩＣ	
*	IC608	X4075A00	IC	XC9572XL-10Q100C	540,5650	J	ＩＣ	07
	IC609	X4318A00	IC	CY62256LL-70SNCT	540,5650	J	メモリＩＣ２５６Ｋ	05
*	IC610	X3938A00	IC	MX23C4000TC-10	540,5650	J	メモリＩＣ ４Ｍ	05
	IC611	XR038A00	IC	NJM2904M OP AMP	540,5650		ＩＣ	01
	IC612	XY120A00	IC	TC74HCT00AF(EL) NA	540,5650		ロジックＩＣ ＳＯＰ	01
*	IC613	XY070A00	IC	MM74HCU04SJX INVER	540,5650		ロジックＩＣ ＳＯＰ	01
	IC614	XZ012A00	IC	TC74HCT08AF(EL)	540,5650	UCRTKABGL	ロジックＩＣ ＳＯＰ	01
*	IC615	X4074A00	IC	74LCX07SJX BUFFER	540,5650	UCRTKABGL	ロジックＩＣ	
	IC617	XF291A00	IC	uPC4570G2	540,5650		ＩＣ	03
	IC618	XF291A00	IC	uPC4570G2	540,5650		ＩＣ	03
	IC619	X3505A00	IC	NJM2068MD-TE2	540,5650		アンプＩＣ ＳＯＰ	02
	IC620	XF291A00	IC	uPC4570G2	540,5650		ＩＣ	03
	IC621	X3505A00	IC	NJM2068MD-TE2	540,5650		アンプＩＣ ＳＯＰ	02
	IC623	XR042A00	IC	TC74HC153AF	540,5650	UCRTKABGL	ＩＣ	02
	L601	V2726500	COIL	68uH	540,5650		コイル	01
	L602	V2726500	COIL	68uH	540,5650		コイル	01
	L603	V2726500	COIL	68uH	540,5650		コイル	01
	PJ601	V4483900	JACK.PIN	YKC21-3895	540,5650		ピンジャック １Ｐ	
	Q601	VC124000	TR.DGT	DTA144EK	540,5650		デジタルトランジスタ	03
	Q602	VD303700	TR	2SC3326 A,B	540,5650		トランジスタ	01
	Q603	VD303700	TR	2SC3326 A,B	540,5650		トランジスタ	01
	Q604	VD303700	TR	2SC3326 A,B	540,5650		トランジスタ	01
	R612	HV753220	R.CAR.FP	2.2Ω 1/4W	540,5650		不燃化カーボン抵抗	01

※ New Parts ＊ 新規部品(マーク#の部品は、基板に含まれません)

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. DSP

	Schm Ref.	PART NO.	Description	Remarks	Markets	部 品 名	Rank
	R664	HV753220	R.CAR.FP 2.2Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R690	HV753220	R.CAR.FP 2.2Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R700	VP939500	R.MTL.FLM 1Ω 1W	540,5650		金属被膜抵抗	01
	R701	VP939500	R.MTL.FLM 1Ω 1W	540,5650		金属被膜抵抗	01
	R703	VU224000	R.MTL.FLM 0.22Ω 1W	540,5650		金属被膜抵抗	01
	R730	VP939600	R.MTL.FLM 2.2Ω 1W	540,5650		金属被膜抵抗	
	R738	VP939600	R.MTL.FLM 2.2Ω 1W	540,5650		金属被膜抵抗	
	ST1	V4040500	SCR.TERM M3	540,5650		スクリュー／ターミナル	01
	U601	V6022800	CN.FBRLINK 1P GP1FA551TZ	540,5650		光ファイバデータリンク	03
	U602	V5478200	CN.PHOT.SN 1P GP1FA551RZ	540,5650		光ファイバ受信器	06
	U603	V5478200	CN.PHOT.SN 1P GP1FA551RZ	540,5650		光ファイバ受信器	06
	U604	V5478200	CN.PHOT.SN 1P GP1FA551RZ	540,5650		光ファイバ受信器	06
	XL601	V3625700	RSNR.CRYS 24.576MHz	540,5650		水晶振動子	03
*		WA704400	P.C.B. DSP	440,5640	J	ＰＣＢ　ＤＳＰ	
*		WA704500	P.C.B. DSP	440,5640	UCRTKABGL	ＰＣＢ　ＤＳＰ	
	CB602	VF982300	CN.BS.PIN 17P	440,5640		ＦＦＣコネクター	01
	CB603	VF982300	CN.BS.PIN 17P	440,5640		ＦＦＣコネクター	01
	C603	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C605	US061220	C.CE.M.CHP 22pF 50V	440,5640		チップセラコン	01
	C606	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C607	UR847220	C.EL 22uF 25V	440,5640		ケミコン	01
	C608	UR818100	C.EL 100uF 6.3V	440,5640	J	ケミコン	01
	C609	US135100	C.CE.CHP 0.1uF 16V	440,5640	J	チップセラコン	01
	C613	US061100	C.CE.M.CHP 10pF 50V	440,5640		チップセラコン	01
	C614	US135100	C.CE.CHP 0.1uF 16V	440,5640	J	チップセラコン	01
	C615	UR818100	C.EL 100uF 6.3V	440,5640	J	ケミコン	01
	C616	US062220	C.CE.CHP 220pF 50V	440,5640		チップセラコン	01
	C617	US063100	C.CE.M.CHP 1000pF 50V	440,5640		チップセラコン	01
	C619	UR818100	C.EL 100uF 6.3V	440,5640	J	ケミコン	01
	C620	UR818100	C.EL 100uF 6.3V	440,5640	J	ケミコン	01
	C622	US135100	C.CE.CHP 0.1uF 16V	440,5640	J	チップセラコン	01
	C623	US062100	C.CE.M.CHP 100pF 50V	440,5640	J	チップセラコン	01
	C624	US135100	C.CE.CHP 0.1uF 16V	440,5640	J	チップセラコン	01
	C625	UR819100	C.EL 1000uF 6.3V	440,5640		ケミコン	01
	C626	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C627	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C628	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C631	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C633	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C635	UR819100	C.EL 1000uF 6.3V	440,5640		ケミコン	01
	C636	UR818100	C.EL 100uF 6.3V	440,5640	J	ケミコン	01
	C637	UR819100	C.EL 1000uF 6.3V	440,5640		ケミコン	01
	C638	US135100	C.CE.CHP 0.1uF 16V	440,5640	J	チップセラコン	01
	C639	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C640	UR818100	C.EL 100uF 6.3V	440,5640		ケミコン	01
	C641	UR819100	C.EL 1000uF 6.3V	440,5640		ケミコン	01
	C642	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C643	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C644	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C645	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. DSP

Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
C646	UR818470	C.EL	470uF	6.3V	440,5640		ケミコン	01
C647	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C648	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C649	US061180	C.CE.CHP	18pF	50V	440,5640		チップセラコン	01
C650	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C651	US061180	C.CE.CHP	18pF	50V	440,5640		チップセラコン	01
C653	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C654	UR818470	C.EL	470uF	6.3V	440,5640		ケミコン	01
C655	US062470	C.CE.M.CHP	470pF	50V	440,5640		チップセラコン	01
C656	US135100	C.CE.CHP	0.1uF	16V	440,5640	J	チップセラコン	01
C657	UR818100	C.EL	100uF	6.3V	440,5640	J	ケミコン	01
C658	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C659	US135100	C.CE.CHP	0.1uF	16V	440,5640	J	チップセラコン	01
C660	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C661	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C662	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C663	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C664	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C665	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C666	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C667	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C668	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C669	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C670	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C672	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C673	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C674	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C675	US063470	C.CE.CHP	4700pF	50V	440,5640		チップセラコン	01
C676	US135100	C.CE.CHP	0.1uF	16V	440,5640	J	チップセラコン	01
C677	US135100	C.CE.CHP	0.1uF	16V	440,5640	J	チップセラコン	01
C678	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C679	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C680	UR818100	C.EL	100uF	6.3V	440,5640	J	ケミコン	01
C681	UR818100	C.EL	100uF	6.3V	440,5640	J	ケミコン	01
C682	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C683	US063470	C.CE.CHP	4700pF	50V	440,5640		チップセラコン	01
C684	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C685	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C686	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C687	US135100	C.CE.CHP	0.1uF	16V	440,5640	UCRTKABGL	チップセラコン	01
C688	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C689	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C690	UR817470	C.EL	47uF	6.3V	440,5640		ケミコン	01
C691	UR866220	C.EL	2.2uF	50V	440,5640		ケミコン	01
C692	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C693	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C694	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C695	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C696	UR819100	C.EL	1000uF	6.3V	440,5640		ケミコン	01
C697	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C698	US064100	C.CE.M.CHP	0.01uF	50V	440,5640		チップセラコン	01
C699	US062470	C.CE.M.CHP	470pF	50V	440,5640		チップセラコン	01
C700	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. DSP

Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
C701	UR819100	C.EL	1000uF	6.3V	440,5640	UCRTKABGL	ケミコン	01
C702	US135100	C.CE.CHP	0.1uF	16V	440,5640	UCRTKABGL	チップセラコン	01
C703	UR818100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C704	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C705	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C707	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C708	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C709	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C710	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C711	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C712	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C713	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C715	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C716	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C717	US061470	C.CE.M.CHP	47pF	50V	440,5640		チップセラコン	01
C718	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C719	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C721	US135100	C.CE.CHP	0.1uF	16V	440,5640	UCRTKABGL	チップセラコン	01
C722	UU118100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C723	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C724	UU118100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C725	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C726	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C727	UU118100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C728	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C729	UU118100	C.EL	100uF	6.3V	440,5640		ケミコン	01
C730	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C739	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C740	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C741	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C742	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C743	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C744	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C745	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C748	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C749	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C752	UA652680	C.MYLAR	680pF	50V	440,5640		マイラーコン	01
C753	UA652680	C.MYLAR	680pF	50V	440,5640		マイラーコン	01
C754	UA652680	C.MYLAR	680pF	50V	440,5640		マイラーコン	01
C755	UA652680	C.MYLAR	680pF	50V	440,5640		マイラーコン	01
C756	UA652470	C.MYLAR	470pF	50V	440,5640		マイラーコン	01
C757	UA652470	C.MYLAR	470pF	50V	440,5640		マイラーコン	01
C758	UA653390	C.MYLAR	3900pF	50V	440,5640		マイラーコン	01
C761	UR337100	C.EL	10uF	16V	440,5640		ケミコン ＡＳＦ	03
C762	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C763	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C764	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C765	UR337100	C.EL	10uF	16V	440,5640		ケミコン ＡＳＦ	03
C766	UR337100	C.EL	10uF	16V	440,5640		ケミコン ＡＳＦ	03
C767	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C768	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C769	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C770	UR337470	C.EL	47uF	16V	440,5640	J	ケミコン ＡＳＦ	03

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. DSP

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	C770	WB301700	C.EL	47uF 16V	440,5640	UCRTKABGL	ケミコン	
	C771	UR337470	C.EL	47uF 16V	440,5640	J	ケミコン ＡＳＦ	03
*	C771	WB301700	C.EL	47uF 16V	440,5640	UCRTKABGL	ケミコン	
	C772	UR337470	C.EL	47uF 16V	440,5640	J	ケミコン ＡＳＦ	03
*	C772	WB301700	C.EL	47uF 16V	440,5640	UCRTKABGL	ケミコン	
	C773	UR337470	C.EL	47uF 16V	440,5640	J	ケミコン ＡＳＦ	03
*	C773	WB301700	C.EL	47uF 16V	440,5640	UCRTKABGL	ケミコン	
	C776	US061470	C.CE.M.CHP	47pF 50V	440,5640		チップセラコン	01
	C778	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C779	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C780	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C781	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C790	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C791	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C792	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C793	UA654470	C.MYLAR	0.047uF 50V	440,5640		マイラーコン	01
	C794	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C795	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C796	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	D601	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D602	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D605	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D606	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D607	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D608	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D609	VV220700	DIODE.SHOT	RB501V-40	440,5640		ショットキーダイオード	01
	D610	VV220700	DIODE.SHOT	RB501V-40	440,5640		ショットキーダイオード	01
	D611	VV220700	DIODE.SHOT	RB501V-40	440,5640		ショットキーダイオード	01
	D612	VV220700	DIODE.SHOT	RB501V-40	440,5640		ショットキーダイオード	01
	IC601	X0238B00	IC	YSS938	440,5640		ＩＣ	13
	IC602	XV077B00	IC	MSM514260E-60JS	440,5640		メモリＩＣ ４Ｍ	07
	IC603	XZ003A00	IC	PQ025EZ5MZP 2.5V	440,5640		電源ＩＣ ＱＦＰ	03
	IC604	XU965A00	IC	uPC29M33T-E1 3.3V	440,5640		電源ＩＣ	03
*	IC605	X3820A00	IC	AK4529VQ	440,5640		ＩＣ	
	IC607	X3473A00	IC	CS493292-CLR	440,5640	J	ＩＣ	15
*	IC607	X3939A00	IC	CS493264-CL	440,5640	UCRTKABGL	ＩＣ	
*	IC608	X4075A00	IC	XC9572XL-10Q100C	440,5640	J	ＩＣ	07
	IC609	X4318A00	IC	CY62256LL-70SNCT	440,5640	J	メモリＩＣ２５６Ｋ	05
*	IC610	X3938A00	IC	MX23C4000TC-10	440,5640	J	メモリＩＣ ４Ｍ	05
*	IC613	XY070A00	IC	MM74HCU04SJX INVER	440,5640		ロジックＩＣ ＳＯＰ	01
	IC614	XZ012A00	IC	TC74HCT08AF(EL)	440,5640	UCRTKABGL	ロジックＩＣ ＳＯＰ	01
*	IC615	X4074A00	IC	74LCX07SJX BUFFER	440,5640	UCRTKABGL	ロジックＩＣ	
	IC617	XF291A00	IC	uPC4570G2	440,5640		ＩＣ	03
	IC618	XF291A00	IC	uPC4570G2	440,5640		ＩＣ	03
	IC619	X3505A00	IC	NJM2068MD-TE2	440,5640		アンプＩＣ ＳＯＰ	02
	IC620	XF291A00	IC	uPC4570G2	440,5640		ＩＣ	03
	IC621	X3505A00	IC	NJM2068MD-TE2	440,5640		アンプＩＣ ＳＯＰ	02
	IC623	XR042A00	IC	TC74HC153AF	440,5640	UCRTKABGL	ＩＣ	02
	L603	V2726500	COIL	68uH	440,5640		コイル	01
	PJ601	V4483900	JACK.PIN	YKC21-3895	440,5640		ピンジャック １Ｐ	
	Q601	VC124000	TR.DGT	DTA144EK	440,5640		デジタルトランジスタ	03
	Q602	VD303700	TR	2SC3326 A,B	440,5640		トランジスタ	01
	Q603	VD303700	TR	2SC3326 A,B	440,5640		トランジスタ	01

※ New Parts ＊ 新規部品(マーク#の部品は、基板に含まれません)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. DSP & P.C.B. FUNCTION

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	Q604	VD303700	TR	2SC3326 A,B	440,5640		トランジスタ	01
	R612	HV753220	R.CAR.FP	2.2Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R664	HV753220	R.CAR.FP	2.2Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R690	HV753220	R.CAR.FP	2.2Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R700	VP939500	R.MTL.FLM	1Ω 1W	440,5640		金属被膜抵抗	01
	R701	VP939500	R.MTL.FLM	1Ω 1W	440,5640		金属被膜抵抗	01
	R703	VU224000	R.MTL.FLM	0.22Ω 1W	440,5640		金属被膜抵抗	01
	R730	VP939600	R.MTL.FLM	2.2Ω 1W	440,5640		金属被膜抵抗	
	R738	VP939600	R.MTL.FLM	2.2Ω 1W	440,5640		金属被膜抵抗	
	ST1	V4040500	SCR.TERM	M3	440,5640		スクリュー／ターミナル	01
	U603	V5478200	CN.PHOT.SN	1P GP1FA551RZ	440,5640		光ファイバ受信器	06
	XL601	V3625700	RSNR.CRYS	24.576MHz	440,5640		水晶振動子	03
*		WA707000	P.C.B.	FUNCTION	540,5650	J	ＰＣＢ ファンクション	
*		WA707100	P.C.B.	FUNCTION	540,5650	UC	ＰＣＢ ファンクション	
*		WA707200	P.C.B.	FUNCTION	540,5650	RK	ＰＣＢ ファンクション	
*		WB225700	P.C.B.	FUNCTION	540,5650	T	ＰＣＢ ファンクション	
*		WA707300	P.C.B.	FUNCTION	540,5650	AL	ＰＣＢ ファンクション	
*		WA707400	P.C.B.	FUNCTION	540,5650	BG	ＰＣＢ ファンクション	
	CB301	V7826300	CN	13P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	
*	CB301	VQ963400	CN	13P TE	540,5650	T	ウエハー	
	CB302	V7828500	SOCKET	18P TE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB302	VQ962100	CN	18P SE	540,5650	T	ハウジング	
	CB304	VM973500	CN.BS.PIN	17P	540,5650		ＦＦＣコネクター	01
	CB305	VQ044200	CN.BS.PIN	6P	540,5650		ＦＦＣコネクター	01
	CB306	VB858500	CN.BS.PIN	6P	540,5650		ベースピン	01
	CB307	VF982300	CN.BS.PIN	17P	540,5650		ＦＦＣコネクター	01
	CB501	V7828000	SOCKET	13P SE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB501	VQ961600	CN	13P SE	540,5650	T	ハウジング	
	CB502	V7826300	CN	13P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	
*	CB502	VQ963400	CN	13P TE	540,5650	T	ウエハー	
	CB503	V7828000	SOCKET	13P SE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB503	VQ961600	CN	13P SE	540,5650	T	ウエハー	
	CB601	VM929900	CN.BS.PIN	15P	540,5650		ＦＰＣコネクター	01
	CB602	Vi879000	CN.BS.PIN	12P	540,5650		ケーブルホルダー	01
	CB603	Vi878800	CN.BS.PIN	10P	540,5650		ケーブルホルダー	01
	CB605	VM973500	CN.BS.PIN	17P	540,5650		ＦＦＣコネクター	01
	CB606	VM973500	CN.BS.PIN	17P	540,5650		ＦＦＣコネクター	01
	CB607	V7825500	CN	5P TE TUC SERIES	540,5650	UCRKABGL	コネクタープラグ	01
*	CB607	VQ962600	CN	5P TE	540,5650	T	ウエハー	
*	CB609	V7825900	CN	9P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	
*	CB609	VQ963000	CN	9P TE	540,5650	T	ウエハー	
*	CB610	V7825900	CN	9P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	
*	CB610	VQ963000	CN	9P TE	540,5650	T	ウエハー	
	CB611	V7826800	CN	18P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	
*	CB611	VQ963900	CN	18P TE	540,5650	T	ウエハー	
	CB613	VQ044400	CN.BS.PIN	9P	540,5650		ＦＦＣコネクター	01
*	CB701	V7827600	SOCKET	9P SE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB701	VQ961200	CN	9P SE	540,5650	T	ハウジング	
*	CB801	V7827600	SOCKET	9P SE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB801	VQ961200	CN	9P SE	540,5650	T	ハウジング	

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. FUNCTION

	Schm Ref.	PART NO.	Description	Remarks	Markets	部 品 名	Rank
	CB821	V7827200	SOCKET 5P TE TUC SERIES	540,5650	UCRKABGL	コネクターソケット	
*	CB821	VQ960800	CN 5P SE	540,5650	T	ハウジング	
	CB822	LB919020	CN.BS.PIN 2P	540,5650		ベース付ポスト	01
	C301	UA652100	C.MYLAR 100pF 50V	540,5650		マイラーコン	01
	C302	UA652100	C.MYLAR 100pF 50V	540,5650		マイラーコン	01
	C303	UA652100	C.MYLAR 100pF 50V	540,5650		マイラーコン	01
	C304	UA652100	C.MYLAR 100pF 50V	540,5650		マイラーコン	01
	C305	FG651470	C.CE 47pF 50V	540,5650		セラコン	01
	C306	FG651470	C.CE 47pF 50V	540,5650		セラコン	01
	C307	UR877100	C.EL 10uF 63V	540,5650		ケミコン	01
	C308	UR877100	C.EL 10uF 63V	540,5650		ケミコン	01
	C309	US064100	C.CE.M.CHP 0.01uF 50V	540,5650		チップセラコン	01
	C310	US062220	C.CE.CHP 220pF 50V	540,5650		チップセラコン	01
	C311	US062220	C.CE.CHP 220pF 50V	540,5650		チップセラコン	01
	C312	US062220	C.CE.CHP 220pF 50V	540,5650		チップセラコン	01
	C313	US062220	C.CE.CHP 220pF 50V	540,5650		チップセラコン	01
	C314	US062220	C.CE.CHP 220pF 50V	540,5650		チップセラコン	01
	C315	US062220	C.CE.CHP 220pF 50V	540,5650		チップセラコン	01
	C316	US135100	C.CE.CHP 0.1uF 16V	540,5650		チップセラコン	01
	C317	UU137100	C.EL 10uF 16V	540,5650		ケミコン	01
	C318	UU137100	C.EL 10uF 16V	540,5650		ケミコン	01
	C319	US135100	C.CE.CHP 0.1uF 16V	540,5650		チップセラコン	01
	C320	UU137100	C.EL 10uF 16V	540,5650		ケミコン	01
	C321	UR877100	C.EL 10uF 63V	540,5650		ケミコン	01
	C322	UU137100	C.EL 10uF 16V	540,5650		ケミコン	01
	C323	UR877100	C.EL 10uF 63V	540,5650		ケミコン	01
	C324	UA653470	C.MYLAR 4700pF 50V	540,5650		マイラーコン	01
	C325	UA653470	C.MYLAR 4700pF 50V	540,5650		マイラーコン	01
	C326	UR877100	C.EL 10uF 63V	540,5650		ケミコン	01
	C327	VE326300	C.MYLAR.ML 0.18uF 50V	540,5650		積層マイラーコン	01
	C328	UA655150	C.MYLAR 0.15uF 50V	540,5650		マイラーコン	01
	C329	UU137100	C.EL 10uF 16V	540,5650		ケミコン	01
	C330	VE326300	C.MYLAR.ML 0.18uF 50V	540,5650		積層マイラーコン	01
	C331	UA655150	C.MYLAR 0.15uF 50V	540,5650		マイラーコン	01
	C332	US135100	C.CE.CHP 0.1uF 16V	540,5650		チップセラコン	01
	C333	US135100	C.CE.CHP 0.1uF 16V	540,5650		チップセラコン	01
	C334	UR877100	C.EL 10uF 63V	540,5650		ケミコン	01
	C335	US135100	C.CE.CHP 0.1uF 16V	540,5650		チップセラコン	01
	C336	US135100	C.CE.CHP 0.1uF 16V	540,5650		チップセラコン	01
	C337	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C338	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C339	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C340	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C341	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C342	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C343	UU137100	C.EL 10uF 16V	540,5650		ケミコン	01
	C344	UU137100	C.EL 10uF 16V	540,5650		ケミコン	01
	C345	UT652100	C.PP 100pF 100V	540,5650		ＰＰコン	01
	C346	UT652100	C.PP 100pF 100V	540,5650		ＰＰコン	01
	C347	UR337100	C.EL 10uF 16V	540,5650		ケミコン ＡＳＦ	03
	C348	UR337100	C.EL 10uF 16V	540,5650		ケミコン ＡＳＦ	03
	C349	UA654270	C.MYLAR 0.027uF 50V	540,5650		マイラーコン	01
	C350	UA654270	C.MYLAR 0.027uF 50V	540,5650		マイラーコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. FUNCTION

Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
C351	UU137100	C.EL	10uF	16V	540,5650		ケミコン	01
C352	UU137100	C.EL	10uF	16V	540,5650		ケミコン	01
C353	UA654270	C.MYLAR	0.027uF	50V	540,5650		マイラーコン	01
C354	UA654270	C.MYLAR	0.027uF	50V	540,5650		マイラーコン	01
C355	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C356	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C357	VG291300	C.EL	100uF	50V	540,5650		ケミコン	01
C358	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C359	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C360	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C361	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C362	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C363	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C364	VG291300	C.EL	100uF	50V	540,5650		ケミコン	01
C365	UR877220	C.EL	22uF	63V	540,5650		ケミコン	01
C366	UR867330	C.EL	33uF	50V	540,5650		ケミコン	01
C367	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C368	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
C369	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
C372	VG291200	C.EL	47uF	50V	540,5650		ケミコン	01
C373	VG291200	C.EL	47uF	50V	540,5650		ケミコン	01
C374	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C375	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C376	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C377	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C378	UR866220	C.EL	2.2uF	50V	540,5650		ケミコン	01
C379	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C380	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C502	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C503	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C504	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C505	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C506	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C507	UA652100	C.MYLAR	100pF	50V	540,5650		マイラーコン	01
C508	FG651470	C.CE	47pF	50V	540,5650		セラコン	01
C509	FG651470	C.CE	47pF	50V	540,5650		セラコン	01
C510	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C511	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C512	UA654100	C.MYLAR	0.01uF	50V	540,5650		マイラーコン	01
C513	US064100	C.CE.M.CHP	0.01uF	50V	540,5650		チップセラコン	01
C601	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C602	UR847470	C.EL	47uF	25V	540,5650		ケミコン	01
C603	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C604	UR865100	C.EL	0.1uF	50V	540,5650		ケミコン	01
C605	UR865220	C.EL	0.22uF	50V	540,5650		ケミコン	01
C606	UR865100	C.EL	0.1uF	50V	540,5650		ケミコン	01
* C607	WB165500	C.EL	0.33F	5.5V	540,5650		ゴールドキャパシタ	
C608	UR818220	C.EL	220uF	6.3V	540,5650		ケミコン	01
C609	UR819100	C.EL	1000uF	6.3V	540,5650		ケミコン	01
C610	UR819100	C.EL	1000uF	6.3V	540,5650		ケミコン	01
C611	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C612	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C613	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. FUNCTION

Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
C614	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C615	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C618	UR866220	C.EL	2.2uF	50V	540,5650		ケミコン	01
C620	UR866220	C.EL	2.2uF	50V	540,5650		ケミコン	01
C621	UR866220	C.EL	2.2uF	50V	540,5650		ケミコン	01
C622	US064100	C.CE.M.CHP	0.01uF	50V	540,5650		チップセラコン	01
C623	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C624	US063100	C.CE.M.CHP	1000pF	50V	540,5650		チップセラコン	01
C625	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C626	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C627	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C628	UR847470	C.EL	47uF	25V	540,5650		ケミコン	01
C629	UR866220	C.EL	2.2uF	50V	540,5650		ケミコン	01
C630	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C631	US135100	C.CE.CHP	0.1uF	16V	540,5650	BG	チップセラコン	01
C632	US062330	C.CE.M.CHP	330pF	50V	540,5650	BG	チップセラコン	01
C633	US062330	C.CE.M.CHP	330pF	50V	540,5650	BG	チップセラコン	01
C634	UR847470	C.EL	47uF	25V	540,5650	BG	ケミコン	01
C635	UR847470	C.EL	47uF	25V	540,5650	BG	ケミコン	01
C636	US062560	C.CE.CHP	560pF	50V	540,5650	BG	チップセラ（ＳＬ	01
C637	VA761100	C.CE	27pF	50V	540,5650	BG	セラコン	01
C638	US135100	C.CE.CHP	0.1uF	16V	540,5650	BG	チップセラコン	01
C639	VA761100	C.CE	27pF	50V	540,5650	BG	セラコン	01
C640	UR847470	C.EL	47uF	25V	540,5650	BG	ケミコン	01
C701	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C702	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C703	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C704	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C705	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C706	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C707	US062100	C.CE.M.CHP	100pF	50V	540,5650		チップセラコン	01
C708	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C709	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C710	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C711	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C712	UR829100	C.EL	1000uF	10V	540,5650		ケミコン	01
C713	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C714	UR829100	C.EL	1000uF	10V	540,5650		ケミコン	01
C715	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C716	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C717	US063100	C.CE.M.CHP	1000pF	50V	540,5650		チップセラコン	01
C718	US063100	C.CE.M.CHP	1000pF	50V	540,5650		チップセラコン	01
C719	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C731	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
C732	UR828100	C.EL	100uF	10V	540,5650		ケミコン	01
C733	UR828100	C.EL	100uF	10V	540,5650		ケミコン	01
C734	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C735	US135100	C.CE.CHP	0.1uF	16V	540,5650		チップセラコン	01
C736	UA653220	C.MYLAR	2200pF	50V	540,5650		マイラーコン	01
C737	UR866470	C.EL	4.7uF	50V	540,5650		ケミコン	01
C738	UR828100	C.EL	100uF	10V	540,5650		ケミコン	01
C739	UR828100	C.EL	100uF	10V	540,5650		ケミコン	01
C741	UR828100	C.EL	100uF	10V	540,5650		ケミコン	01

＊New Parts　＊新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. FUNCTION

Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
C742	US064100	C.CE.M.CHP	0.01uF 50V	540,5650		チップセラコン	01
C743	UR847470	C.EL	47uF 25V	540,5650		ケミコン	01
C744	US062120	C.CE.CHP	120pF 50V	540,5650		チップセラコン	01
C745	US062220	C.CE.CHP	220pF 50V	540,5650		チップセラコン	01
C746	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C747	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
C748	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C801	US062100	C.CE.M.CHP	100pF 50V	540,5650		チップセラコン	01
C802	US062100	C.CE.M.CHP	100pF 50V	540,5650		チップセラコン	01
C803	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C804	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C805	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C806	UR829100	C.EL	1000uF 10V	540,5650		ケミコン	01
C807	UR829100	C.EL	1000uF 10V	540,5650		ケミコン	01
C808	US063100	C.CE.M.CHP	1000pF 50V	540,5650		チップセラコン	01
C809	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C810	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C821	US062100	C.CE.M.CHP	100pF 50V	540,5650	UCRTKABGL	チップセラコン	01
C822	US062100	C.CE.M.CHP	100pF 50V	540,5650	UCRTKABGL	チップセラコン	01
C823	US062100	C.CE.M.CHP	100pF 50V	540,5650	UCRTKABGL	チップセラコン	01
C824	US135100	C.CE.CHP	0.1uF 16V	540,5650	UCRTKABGL	チップセラコン	01
C825	US135100	C.CE.CHP	0.1uF 16V	540,5650	UCRTKABGL	チップセラコン	01
C826	UR828100	C.EL	100uF 10V	540,5650	UCRTKABGL	ケミコン	01
C827	UR828100	C.EL	100uF 10V	540,5650	UCRTKABGL	ケミコン	01
C828	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C829	UR847470	C.EL	47uF 25V	540,5650		ケミコン	01
C830	US064100	C.CE.M.CHP	0.01uF 50V	540,5650		チップセラコン	01
C831	US062100	C.CE.M.CHP	100pF 50V	540,5650		チップセラコン	01
C832	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
C833	US135100	C.CE.CHP	0.1uF 16V	540,5650		チップセラコン	01
C834	UR858100	C.EL	100uF 35V	540,5650		ケミコン	01
C840	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C841	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
C842	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
D301	VU994300	DIODE.ZENR	MA8075-H 7.7V	540,5650		ツェナーダイオード	
D302	VU994300	DIODE.ZENR	MA8075-H 7.7V	540,5650		ツェナーダイオード	
D303	VU172000	DIODE.ZENR	UDZS5.6BTE-17 5.6V	540,5650		ツェナーダイオード	01
D304	VU172000	DIODE.ZENR	UDZS5.6BTE-17 5.6V	540,5650		ツェナーダイオード	01
D601	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D602	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D603	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D604	VU172100	DIODE.ZENR	UDZS6.2B 6.2V	540,5650	RTK	ツェナーダイオード	01
D604	VU172200	DIODE.ZENR	UDZ6.8B 6.8V	540,5650	JUCABGL	ツェナーダイオード	01
D605	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D606	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D607	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D608	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D609	VU171900	DIODE.ZENR	UDZ5.1B 5.1V	540,5650		ツェナーダイオード	01
D610	VU171900	DIODE.ZENR	UDZ5.1B 5.1V	540,5650		ツェナーダイオード	01
D611	VU171900	DIODE.ZENR	UDZ5.1B 5.1V	540,5650		ツェナーダイオード	01
D612	VU172000	DIODE.ZENR	UDZS5.6BTE-17 5.6V	540,5650		ツェナーダイオード	01
D731	VT332900	DIODE	1SS355	540,5650		ダイオード	01
D732	VT332900	DIODE	1SS355	540,5650		ダイオード	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. FUNCTION

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	D733	VT332900	DIODE	1SS355	540,5650		ダイオード	01
	D734	VT332900	DIODE	1SS355	540,5650		ダイオード	01
*	IC301	X3547A00	IC	BD3841FS	540,5650		ＩＣ	
*	IC302	X3546A00	IC	BD3815KS	540,5650		ＩＣ	
*	IC303	X3545A00	IC	BD3812F-E2	540,5650		ＩＣ	
	IC305	XY879A00	IC	TC74HC4053AF(EL)	540,5650		ロジックＩＣ　ＳＯＰ	03
	IC306	XY879A00	IC	TC74HC4053AF(EL)	540,5650		ロジックＩＣ　ＳＯＰ	03
	IC307	X3505A00	IC	NJM2068MD-TE2	540,5650		アンプＩＣ　ＳＯＰ	02
	IC308	XF291A00	IC	uPC4570G2	540,5650		ＩＣ	03
	IC309	XF291A00	IC	uPC4570G2	540,5650		ＩＣ	03
*	IC601	X3605A00	IC.CPU	M3062VMGP	540,5650		ＩＣ	
	IC602	XJ757A00	IC	NJM78L05A-T3	540,5650		ＩＣ	01
	IC603	XY534A00	IC	LC72722	540,5650	BG	ＲＤＳデコーダＩＣ	06
	IC701	XH436A00	IC	LA7956	540,5650		ＩＣ	03
	IC702	XH436A00	IC	LA7956	540,5650		ＩＣ	03
	IC731	XY879A00	IC	TC74HC4053AF(EL)	540,5650	JUCABGL	ロジックＩＣ　ＳＯＰ	03
	IC732	XW939A00	IC	TK15420M VIDEO AMP	540,5650	JUCABGL	アンプＩＣ　ＳＯＰ	03
	IC733	XD598A00	IC	TC74HCU04AFEL INV	540,5650		ロジックＩＣ	01
	IC734	XY879A00	IC	TC74HC4053AF(EL)	540,5650		ロジックＩＣ　ＳＯＰ	03
	IC735	XW939A00	IC	TK15420M VIDEO AMP	540,5650		アンプＩＣ　ＳＯＰ	03
	IC801	XH436A00	IC	LA7956	540,5650		ＩＣ	03
	IC821	XZ177A00	IC	LA7104M VIDEO AMP	540,5650	UCRTKABGL	アンプＩＣ　ＳＯＰ	04
	IC821	X2904A00	IC	NJM2581M	540,5650	UCRTKABGL	ＩＣ	
	IC822	XY879A00	IC	TC74HC4053AF(EL)	540,5650	UCRTKABGL	ロジックＩＣ　ＳＯＰ	03
	JK701	VS867300	CN	4P　YKF51-5501	540,5650		ミニＤＩＮコネクタ	03
	JK702	V9273500	CN.DIN	2P　YKF51-5605	540,5650		ＤＩＮコネクタ２Ｐ	
	JK703	V9273500	CN.DIN	2P　YKF51-5605	540,5650		ＤＩＮコネクタ２Ｐ	
	L601	VU889500	COIL	220uH	540,5650	BG	円筒形固定コイル	01
	PJ301	V7046800	JACK.PIN	MSP-246V1-01NI	540,5650		ピンジャック　６Ｐ	
	PJ302	V7190400	JACK.PIN	6P	540,5650		ピンジャック　６Ｐ	
	PJ501	V7046700	JACK.PIN	MSP-244V1-01NI	540,5650		ピンジャック　４Ｐ	
	PJ502	V7046700	JACK.PIN	MSP-244V1-01NI	540,5650		ピンジャック　４Ｐ	
	PJ503	V7189700	JACK.PIN	1P	540,5650		ピンジャック　１Ｐ	01
	PJ801	V7190000	JACK.PIN	2P	540,5650		ピンジャック　２Ｐ	
	PJ802	V7190000	JACK.PIN	2P	540,5650		ピンジャック　２Ｐ	
	PJ803	V7189800	JACK.PIN	1P	540,5650		ピンジャック　１Ｐ	
	PJ821	V8143900	JACK PIN	SHIELD YKC21-4348	540,5650	UCRTKABGL	ピンジャック　９Ｐ	04
	PN601	V9637500	PIN	L=70 #18	540,5650		スタイルピン	
	PN602	V9637500	PIN	L=70 #18	540,5650		スタイルピン	
	Q301	iC1815I0	TR	2SC1815 Y	540,5650		トランジスタ	01
	Q302	iA1015I0	TR	2SA1015 Y	540,5650		トランジスタ	01
	Q501	VD303700	TR	2SC3326 A,B	540,5650		トランジスタ	01
	Q502	VD303700	TR	2SC3326 A,B	540,5650		トランジスタ	01
	Q503	VD303700	TR	2SC3326 A,B	540,5650		トランジスタ	01
	Q504	VD303700	TR	2SC3326 A,B	540,5650		トランジスタ	01
	Q601	VV556500	TR	2SA1037K Q,R,S	540,5650		トランジスタ	01
	Q602	VV556400	TR	2SC2412K Q,R,S	540,5650		トランジスタ	01
	Q604	VV556500	TR	2SA1037K Q,R,S	540,5650		トランジスタ	01
	Q606	VV556500	TR	2SA1037K Q,R,S	540,5650		トランジスタ	01
	Q607	VV556500	TR	2SA1037K Q,R,S	540,5650		トランジスタ	01
	Q608	iC1815I0	TR	2SC1815 Y	540,5650		トランジスタ	01
	Q609	iC174020	TR	2SC1740S R,S	540,5650	BG	トランジスタ	01
	Q701	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. FUNCTION

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	Q702	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q703	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q704	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q705	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q706	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q731	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q732	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q733	VK432900	TR	2SD1915F S,T	540,5650	RTK	トランジスタ	01
	Q734	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q735	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q736	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q801	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q802	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q803	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q804	iC174020	TR	2SC1740S R,S	540,5650		トランジスタ	01
	Q821	VV556400	TR	2SC2412K Q,R,S	540,5650	UCRTKABGL	トランジスタ	01
	Q821	VV556400	TR	2SC2412K Q,R,S	540,5650		トランジスタ	01
	R358	VP940200	R.MTL.OXD	47Ω 1W	540,5650		酸化金属被膜抵抗	01
	R359	VP940200	R.MTL.OXD	47Ω 1W	540,5650		酸化金属被膜抵抗	01
	R649	HV753220	R.CAR.FP	2.2Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R715	HV755470	R.CAR.FP	470Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R716	HV755270	R.CAR.FP	270Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R725	HV753220	R.CAR.FP	2.2Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R731	HV755270	R.CAR.FP	270Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R734	HV755470	R.CAR.FP	470Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R750	HV755470	R.CAR.FP	470Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R753	HV755470	R.CAR.FP	470Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R754	HV755470	R.CAR.FP	470Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R808	HV755270	R.CAR.FP	270Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R813	HV753220	R.CAR.FP	2.2Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R814	HV755270	R.CAR.FP	270Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R839	HV753100	R.CAR.FP	1Ω 1/4W	540,5650	RTKALBG	不燃化カーボン抵抗	01
	R840	HV753100	R.CAR.FP	1Ω 1/4W	540,5650	RTKALBG	不燃化カーボン抵抗	01
	ST601	V4040500	SCR.TERM	M3	540,5650		スクリュー／ターミナル	01
*	SW801	V3624300	SW.SLIDE	SS029-P022MJB-PA6	540,5650	RTK	スライドＳＷ	
	T731	V9243200	COIL	K5-MT/035067	540,5650	JUC	ビデオコイルパック	04
*	T731	V9243300	COIL	K5-MT/036067	540,5650	ABGL	ビデオコイルパック	
*	XL601	WA674700	RSNR.CE	16MHz CSTLS16M0X51	540,5650		セラミック振動子	
	XL602	V3930900	RSNR.CRYS	4.332MHz	540,5650	BG	水晶振動子	05
*		WA707500	P.C.B.	FUNCTION	440,5640	J	ＰＣＢ ファンクション	
*		WA707600	P.C.B.	FUNCTION	440,5640	UC	ＰＣＢ ファンクション	
*		WA707700	P.C.B.	FUNCTION	440,5640	RK	ＰＣＢ ファンクション	
*		WB225800	P.C.B.	FUNCTION	440,5640	T	ＰＣＢ ファンクション	
*		WA707800	P.C.B.	FUNCTION	440,5640	AL	ＰＣＢ ファンクション	
*		WA707900	P.C.B.	FUNCTION	440,5640	BG	ＰＣＢ ファンクション	
	CB301	V7826300	CN	13P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	
*	CB301	VQ963400	CN	13P TE	440,5640	T	ウエハー	
	CB302	V7828500	SOCKET	18P TE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB302	VQ962100	CN	18P SE	440,5640	T	ハウジング	
	CB304	VM973500	CN.BS.PIN	17P	440,5640		ＦＦＣコネクター	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. FUNCTION

	Schm Ref.	PART NO.	Description	Remarks	Markets	部 品 名	Rank
	CB305	VQ044200	CN.BS.PIN 6P	440,5640		ＦＦＣコネクター	01
	CB306	VB858500	CN.BS.PIN 6P	440,5640		ベースピン	01
	CB307	VF982300	CN.BS.PIN 17P	440,5640		ＦＦＣコネクター	01
	CB501	V7828000	SOCKET 13P SE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB501	VQ961600	CN 13P SE	440,5640	T	ハウジング	
	CB502	V7826300	CN 13P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	
*	CB502	VQ963400	CN 13P TE	440,5640	T	ウエハー	
	CB503	V7828000	SOCKET 13P SE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB503	VQ961600	CN 13P SE	440,5640	T	ウエハー	
	CB601	VM929900	CN.BS.PIN 15P	440,5640		ＦＰＣコネクター	01
	CB602	Vi879000	CN.BS.PIN 12P	440,5640		ケーブルホルダー	01
	CB603	Vi878800	CN.BS.PIN 10P	440,5640		ケーブルホルダー	01
	CB605	VM973500	CN.BS.PIN 17P	440,5640		ＦＦＣコネクター	01
	CB606	VM973500	CN.BS.PIN 17P	440,5640		ＦＦＣコネクター	01
	CB607	V7825500	CN 5P TE TUC SERIES	440,5640	UCRKABGL	コネクタープラグ	01
*	CB607	VQ962600	CN 5P TE	440,5640	T	ウエハー	
*	CB610	V7825900	CN 9P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	
*	CB610	VQ963000	CN 9P TE	440,5640	T	ウエハー	
	CB611	V7826800	CN 18P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	
*	CB611	VQ963900	CN 18P TE	440,5640	T	ウエハー	
	CB613	VQ044400	CN.BS.PIN 9P	440,5640		ＦＦＣコネクター	01
*	CB801	V7827600	SOCKET 9P SE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB801	VQ961200	CN 9P SE	440,5640	T	ハウジング	
	CB821	V7827200	SOCKET 5P TE TUC SERIES	440,5640	UCRKABGL	コネクターソケット	
*	CB821	VQ960800	CN 5P SE	440,5640	T	ハウジング	
	CB822	LB919020	CN.BS.PIN 2P	440,5640		ベース付ポスト	01
	C301	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C302	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C303	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C304	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C305	FG651470	C.CE 47pF 50V	440,5640		セラコン	01
	C306	FG651470	C.CE 47pF 50V	440,5640		セラコン	01
	C307	UR877100	C.EL 10uF 63V	440,5640		ケミコン	01
	C308	UR877100	C.EL 10uF 63V	440,5640		ケミコン	01
	C309	US064100	C.CE.M.CHP 0.01uF 50V	440,5640		チップセラコン	01
	C310	US062220	C.CE.CHP 220pF 50V	440,5640		チップセラコン	01
	C311	US062220	C.CE.CHP 220pF 50V	440,5640		チップセラコン	01
	C312	US062220	C.CE.CHP 220pF 50V	440,5640		チップセラコン	01
	C313	US062220	C.CE.CHP 220pF 50V	440,5640		チップセラコン	01
	C314	US062220	C.CE.CHP 220pF 50V	440,5640		チップセラコン	01
	C315	US062220	C.CE.CHP 220pF 50V	440,5640		チップセラコン	01
	C316	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C317	UU137100	C.EL 10uF 16V	440,5640		ケミコン	01
	C318	UU137100	C.EL 10uF 16V	440,5640		ケミコン	01
	C319	US135100	C.CE.CHP 0.1uF 16V	440,5640		チップセラコン	01
	C320	UU137100	C.EL 10uF 16V	440,5640		ケミコン	01
	C321	UR877100	C.EL 10uF 63V	440,5640		ケミコン	01
	C322	UU137100	C.EL 10uF 16V	440,5640		ケミコン	01
	C323	UR877100	C.EL 10uF 63V	440,5640		ケミコン	01
	C324	UA653470	C.MYLAR 4700pF 50V	440,5640		マイラーコン	01
	C325	UA653470	C.MYLAR 4700pF 50V	440,5640		マイラーコン	01
	C326	UR877100	C.EL 10uF 63V	440,5640		ケミコン	01
	C327	VE326300	C.MYLAR.ML 0.18uF 50V	440,5640		積層マイラーコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. FUNCTION

Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
C328	UA655150	C.MYLAR	0.15uF	50V	440,5640		マイラーコン	01
C329	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C330	VE326300	C.MYLAR.ML	0.18uF	50V	440,5640		積層マイラーコン	01
C331	UA655150	C.MYLAR	0.15uF	50V	440,5640		マイラーコン	01
C332	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C333	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C334	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C335	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C336	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C337	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C338	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C339	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C340	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C341	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C342	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C343	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C344	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C345	UT652100	C.PP	100pF	100V	440,5640		ＰＰコン	01
C346	UT652100	C.PP	100pF	100V	440,5640		ＰＰコン	01
C347	UR337100	C.EL	10uF	16V	440,5640		ケミコン　ＡＳＦ	03
C348	UR337100	C.EL	10uF	16V	440,5640		ケミコン　ＡＳＦ	03
C349	UA654270	C.MYLAR	0.027uF	50V	440,5640		マイラーコン	01
C350	UA654270	C.MYLAR	0.027uF	50V	440,5640		マイラーコン	01
C351	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C352	UU137100	C.EL	10uF	16V	440,5640		ケミコン	01
C353	UA654270	C.MYLAR	0.027uF	50V	440,5640		マイラーコン	01
C354	UA654270	C.MYLAR	0.027uF	50V	440,5640		マイラーコン	01
C355	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C356	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C357	VG291300	C.EL	100uF	50V	440,5640		ケミコン	01
C358	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C359	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C360	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
C361	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
C362	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C363	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C364	VG291300	C.EL	100uF	50V	440,5640		ケミコン	01
C365	UR877220	C.EL	22uF	63V	440,5640		ケミコン	01
C366	UR867330	C.EL	33uF	50V	440,5640		ケミコン	01
C367	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
C368	UR838100	C.EL	100uF	16V	440,5640		ケミコン	01
C369	UR838100	C.EL	100uF	16V	440,5640		ケミコン	01
C372	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C373	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
C374	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C375	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C376	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C377	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
C378	UR866220	C.EL	2.2uF	50V	440,5640		ケミコン	01
C379	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
C380	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
C502	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
C503	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. FUNCTION

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
	C504	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
	C505	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
	C506	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
	C507	UA652100	C.MYLAR	100pF	50V	440,5640		マイラーコン	01
	C508	FG651470	C.CE	47pF	50V	440,5640		セラコン	01
	C509	FG651470	C.CE	47pF	50V	440,5640		セラコン	01
	C510	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
	C511	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
	C512	UA654100	C.MYLAR	0.01uF	50V	440,5640		マイラーコン	01
	C513	US064100	C.CE.M.CHP	0.01uF	50V	440,5640		チップセラコン	01
	C601	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
	C602	UR847470	C.EL	47uF	25V	440,5640		ケミコン	01
	C603	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
	C604	UR865100	C.EL	0.1uF	50V	440,5640		ケミコン	01
	C605	UR865220	C.EL	0.22uF	50V	440,5640		ケミコン	01
	C606	UR865100	C.EL	0.1uF	50V	440,5640		ケミコン	01
*	C607	WB165500	C.EL	0.33F	5.5V	440,5640		ゴールドキャパシタ	
	C608	UR818220	C.EL	220uF	6.3V	440,5640		ケミコン	01
	C609	UR819100	C.EL	1000uF	6.3V	440,5640		ケミコン	01
	C610	UR819100	C.EL	1000uF	6.3V	440,5640		ケミコン	01
	C611	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
	C612	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
	C613	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
	C614	US135100	C.CE.CHP	0.1uF	16V	440,5640		チップセラコン	01
	C615	US062100	C.CE.M.CHP	100pF	50V	440,5640		チップセラコン	01
	C618	UR866220	C.EL	2.2uF	50V	440,5640		ケミコン	01
	C620	UR866220	C.EL	2.2uF	50V	440,5640		ケミコン	01
	C621	UR866220	C.EL	2.2uF	50V	440,5640		ケミコン	01
	C622	US064100	C.CE.M.CHP	0.01uF	50V	440,5640		チップセラコン	01
	C623	US062100	C.CE.M.CHP	100pF	50V	440,5640		チップセラコン	01
	C624	US063100	C.CE.M.CHP	1000pF	50V	440,5640		チップセラコン	01
	C625	US062100	C.CE.M.CHP	100pF	50V	440,5640		チップセラコン	01
	C626	US062100	C.CE.M.CHP	100pF	50V	440,5640		チップセラコン	01
	C627	US062100	C.CE.M.CHP	100pF	50V	440,5640		チップセラコン	01
	C628	UR847470	C.EL	47uF	25V	440,5640		ケミコン	01
	C629	UR866220	C.EL	2.2uF	50V	440,5640		ケミコン	01
	C630	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
	C631	US135100	C.CE.CHP	0.1uF	16V	440,5640	BG	チップセラコン	01
	C632	US062330	C.CE.M.CHP	330pF	50V	440,5640	BG	チップセラコン	01
	C633	US062330	C.CE.M.CHP	330pF	50V	440,5640	BG	チップセラコン	01
	C634	UR847470	C.EL	47uF	25V	440,5640	BG	ケミコン	01
	C635	UR847470	C.EL	47uF	25V	440,5640	BG	ケミコン	01
	C636	US062560	C.CE.CHP	560pF	50V	440,5640	BG	チップセラ（ＳＬ）	01
	C637	VA761100	C.CE	27pF	50V	440,5640	BG	セラコン	01
	C638	US135100	C.CE.CHP	0.1uF	16V	440,5640	BG	チップセラコン	01
	C639	VA761100	C.CE	27pF	50V	440,5640	BG	セラコン	01
	C640	UR847470	C.EL	47uF	25V	440,5640	BG	ケミコン	01
	C801	US062100	C.CE.M.CHP	100pF	50V	440,5640		チップセラコン	01
	C802	US062100	C.CE.M.CHP	100pF	50V	440,5640		チップセラコン	01
	C803	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
	C804	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
	C805	UR877100	C.EL	10uF	63V	440,5640		ケミコン	01
	C806	UR829100	C.EL	1000uF	10V	440,5640		ケミコン	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. FUNCTION

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	C807	UR829100	C.EL	1000uF 10V	440,5640		ケミコン	01
	C808	US063100	C.CE.M.CHP	1000pF 50V	440,5640		チップセラコン	01
	C809	UR877100	C.EL	10uF 63V	440,5640		ケミコン	01
	C821	US062100	C.CE.M.CHP	100pF 50V	440,5640	UCRTKABGL	チップセラコン	01
	C822	US062100	C.CE.M.CHP	100pF 50V	440,5640	UCRTKABGL	チップセラコン	01
	C823	US062100	C.CE.M.CHP	100pF 50V	440,5640	UCRTKABGL	チップセラコン	01
	C824	US135100	C.CE.CHP	0.1uF 16V	440,5640	UCRTKABGL	チップセラコン	01
	C825	US135100	C.CE.CHP	0.1uF 16V	440,5640	UCRTKABGL	チップセラコン	01
	C826	UR828100	C.EL	100uF 10V	440,5640	UCRTKABGL	ケミコン	01
	C827	UR828100	C.EL	100uF 10V	440,5640	UCRTKABGL	ケミコン	01
	C828	UR877100	C.EL	10uF 63V	440,5640		ケミコン	01
	C830	US064100	C.CE.M.CHP	0.01uF 50V	440,5640		チップセラコン	01
	C832	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C833	US135100	C.CE.CHP	0.1uF 16V	440,5640		チップセラコン	01
	C834	UR858100	C.EL	100uF 35V	440,5640		ケミコン	01
	C840	UR877100	C.EL	10uF 16V	440,5640		ケミコン	01
	C841	UR877100	C.EL	10uF 16V	440,5640		ケミコン	01
	C842	UR877100	C.EL	10uF 16V	440,5640		ケミコン	01
	D301	VU994300	DIODE.ZENR	MA8075-H 7.7V	440,5640		ツェナーダイオード	
	D302	VU994300	DIODE.ZENR	MA8075-H 7.7V	440,5640		ツェナーダイオード	
	D303	VU172000	DIODE.ZENR	UDZS5.6BTE-17 5.6V	440,5640		ツェナーダイオード	01
	D304	VU172000	DIODE.ZENR	UDZS5.6BTE-17 5.6V	440,5640		ツェナーダイオード	01
	D601	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D602	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D603	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D604	VU172100	DIODE.ZENR	UDZS6.2B 6.2V	440,5640	RTK	ツェナーダイオード	01
	D604	VU172200	DIODE.ZENR	UDZ6.8B 6.8V	440,5640	JUCABGL	ツェナーダイオード	01
	D605	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D606	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D607	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D608	VT332900	DIODE	1SS355	440,5640		ダイオード	01
	D609	VU171900	DIODE.ZENR	UDZ5.1B 5.1V	440,5640		ツェナーダイオード	01
	D610	VU171900	DIODE.ZENR	UDZ5.1B 5.1V	440,5640		ツェナーダイオード	01
	D611	VU171900	DIODE.ZENR	UDZ5.1B 5.1V	440,5640		ツェナーダイオード	01
	D612	VU172000	DIODE.ZENR	UDZS5.6BTE-17 5.6V	440,5640		ツェナーダイオード	01
*	IC301	X3547A00	IC	BD3841FS	440,5640		ＩＣ	
*	IC302	X3546A00	IC	BD3815KS	440,5640		ＩＣ	
*	IC303	X3545A00	IC	BD3812F-E2	440,5640		ＩＣ	
	IC305	XY879A00	IC	TC74HC4053AF(EL)	440,5640		ロジックＩＣ ＳＯＰ	03
	IC306	XY879A00	IC	TC74HC4053AF(EL)	440,5640		ロジックＩＣ ＳＯＰ	03
	IC307	X3505A00	IC	NJM2068MD-TE2	440,5640		アンプＩＣ ＳＯＰ	02
	IC308	XF291A00	IC	uPC4570G2	440,5640		ＩＣ	03
	IC309	XF291A00	IC	uPC4570G2	440,5640		ＩＣ	03
*	IC601	X3605A00	IC.CPU	M3062VMGP	440,5640		ＩＣ	
	IC602	XJ757A00	IC	NJM78L05A-T3	440,5640		ＩＣ	01
	IC603	XY534A00	IC	LC72722	440,5640	BG	ＲＤＳデコーダＩＣ	06
	IC801	XH436A00	IC	LA7956	440,5640		ＩＣ	03
	IC821	XZ177A00	IC	LA7104M VIDEO AMP	440,5640	UCRTKABGL	アンプＩＣ ＳＯＰ	04
	IC821	X2904A00	IC	NJM2581M	440,5640	UCRTKABGL	ＩＣ	
	IC822	XY879A00	IC	TC74HC4053AF(EL)	440,5640	UCRTKABGL	ロジックＩＣ ＳＯＰ	03
	L601	VU889500	COIL	220uH	440,5640	BG	円筒形固定コイル	01
	L601	VU889500	COIL	220uH	440,5640		円筒形固定コイル	01
	PJ301	V7046800	JACK.PIN	MSP-246V1-01NI	440,5640		ピンジャック 6Ｐ	

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

P.C.B. FUNCTION & P.C.B. OPERATION

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	PJ302	V7190400	JACK.PIN	6P	440,5640		ピンジャック 6P	
	PJ501	V7046700	JACK.PIN	MSP-244V1-01NI	440,5640		ピンジャック 4P	
	PJ502	V7046700	JACK.PIN	MSP-244V1-01NI	440,5640		ピンジャック 4P	
	PJ503	V7189700	JACK.PIN	1P	440,5640		ピンジャック 1P	01
	PJ801	V7190000	JACK.PIN	2P	440,5640		ピンジャック 2P	
	PJ802	V7190000	JACK.PIN	2P	440,5640		ピンジャック 2P	
	PJ803	V7189800	JACK.PIN	1P	440,5640		ピンジャック 1P	
	PJ821	V8143900	JACK PIN	SHIELD YKC21-4348	440,5640	UCRTKABGL	ピンジャック 9P	04
	PN601	V9637500	PIN	L=70 #18	440,5640		スタイルピン	
	PN602	V9637500	PIN	L=70 #18	440,5640		スタイルピン	
	Q301	iC1815I0	TR	2SC1815 Y	440,5640		トランジスタ	01
	Q302	iA1015I0	TR	2SA1015 Y	440,5640		トランジスタ	01
	Q501	VD303700	TR	2SC3326 A,B	440,5640		トランジスタ	01
	Q502	VD303700	TR	2SC3326 A,B	440,5640		トランジスタ	01
	Q503	VD303700	TR	2SC3326 A,B	440,5640		トランジスタ	01
	Q504	VD303700	TR	2SC3326 A,B	440,5640		トランジスタ	01
	Q601	VV556500	TR	2SA1037K Q,R,S	440,5640		トランジスタ	01
	Q602	VV556400	TR	2SC2412K Q,R,S	440,5640		トランジスタ	01
	Q604	VV556500	TR	2SA1037K Q,R,S	440,5640		トランジスタ	01
	Q606	VV556500	TR	2SA1037K Q,R,S	440,5640		トランジスタ	01
	Q607	VV556500	TR	2SA1037K Q,R,S	440,5640		トランジスタ	01
	Q608	iC1815I0	TR	2SC1815 Y	440,5640		トランジスタ	01
	Q609	iC174020	TR	2SC1740S R,S	440,5640	BG	トランジスタ	01
	Q801	iC174020	TR	2SC1740S R,S	440,5640		トランジスタ	01
	Q802	iC174020	TR	2SC1740S R,S	440,5640		トランジスタ	01
	Q803	iC174020	TR	2SC1740S R,S	440,5640		トランジスタ	01
	Q821	VV556400	TR	2SC2412K Q,R,S	440,5640	UCRTKABGL	トランジスタ	01
	R358	VP940200	R.MTL.OXD	47Ω 1W	440,5640		酸化金属被膜抵抗	01
	R359	VP940200	R.MTL.OXD	47Ω 1W	440,5640		酸化金属被膜抵抗	01
	R649	HV753220	R.CAR.FP	2.2Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R808	HV755270	R.CAR.FP	270Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R813	HV753220	R.CAR.FP	2.2Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R839	HV753100	R.CAR.FP	1Ω 1/4W	440,5640	UCRTKABGL	不燃化カーボン抵抗	01
	R840	HV753100	R.CAR.FP	1Ω 1/4W	440,5640	UCRTKABGL	不燃化カーボン抵抗	01
	ST601	V4040500	SCR.TERM	M3	440,5640		スクリュー／ターミナル	01
*	SW801	V3624300	SW.SLIDE	SS029-P022MJB-PA6	440,5640	RTK	スライドＳＷ	
*	XL601	WA674700	RSNR.CE	16MHz CSTLS16M0X51	440,5640		セラミック振動子	
	XL602	V3930900	RSNR.CRYS	4.332MHz	440,5640	BG	水晶振動子	05
*		WA708400	P.C.B.	OPERATION		JUCRTKAL	ＰＣＢ オペレーション	
*		WA708500	P.C.B.	OPERATION		BG	ＰＣＢ オペレーション	
	CB501	Vi878100	CN.BS.PIN	3P			ケーブルホルダー	01
*	CB502	WA005400	CN	17P BE 52492SERIES			ＦＦＣコネクター	
	CB503	Vi878200	CN.BS.PIN	4P			ケーブルホルダー	01
	CB504	Vi878000	CN.BS.PIN	2P			ケーブルホルダー	01
	CB571	Vi878200	CN.BS.PIN	4P			ケーブルホルダー	01
	CB576	Vi878100	CN.BS.PIN	3P			ケーブルホルダー	01
	CB581	VQ044200	CN.BS.PIN	6P			ＦＦＣコネクター	01
	CB601	VB390100	CN.BS.PIN	5P			ベースピン	01
	CB611	Vi878000	CN.BS.PIN	2P			ケーブルホルダー	01
	CB612	LB919020	CN.BS.PIN	2P			ベース付ポスト	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

P.C.B. OPERATION

Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
C501	US063100	C.CE.M.CHP	1000pF 50V			チップセラコン	01
C502	US063100	C.CE.M.CHP	1000pF 50V			チップセラコン	01
C503	US063100	C.CE.M.CHP	1000pF 50V			チップセラコン	01
C504	US063100	C.CE.M.CHP	1000pF 50V			チップセラコン	01
C505	UM397100	C.EL	10uF 16V			ケミコン	01
C506	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C507	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C508	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C509	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C510	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C511	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C512	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C513	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C514	UR818330	C.EL	330uF 6.3V			ケミコン	01
C515	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C516	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C517	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C518	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C519	US064100	C.CE.M.CHP	0.01uF 50V			チップセラコン	01
C520	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C521	US064100	C.CE.M.CHP	0.01uF 50V			チップセラコン	01
C551	UM397100	C.EL	10uF 16V			ケミコン	01
C552	UM397100	C.EL	10uF 16V			ケミコン	01
C553	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C554	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C555	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C556	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C557	UM397100	C.EL	10uF 16V			ケミコン	01
C558	UM397100	C.EL	10uF 16V			ケミコン	01
C559	US061100	C.CE.M.CHP	10pF 50V			チップセラコン	01
C560	US061100	C.CE.M.CHP	10pF 50V			チップセラコン	01
C561	UR839100	C.EL	1000uF 16V			ケミコン	01
C562	UR839100	C.EL	1000uF 16V			ケミコン	01
C564	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C565	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C566	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C567	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C568	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C569	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C581	US064100	C.CE.M.CHP	0.01uF 50V			チップセラコン	01
C582	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
C583	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C584	US062100	C.CE.M.CHP	100pF 50V			チップセラコン	01
C587	UR877100	C.EL	10uF 63V			ケミコン	01
C588	UR877100	C.EL	10uF 63V			ケミコン	01
C589	UR877100	C.EL	10uF 63V			ケミコン	01
C590	UR877100	C.EL	10uF 63V			ケミコン	01
C591	UR838220	C.EL	220uF 16V			ケミコン	01
C601	UA654100	C.MYLAR	0.01uF 50V			マイラーコン	01
C602	UA653100	C.MYLAR	1000pF 50V			マイラーコン	03
C603	UA654100	C.MYLAR	0.01uF 50V			マイラーコン	01
C604	UA654100	C.MYLAR	0.01uF 50V			マイラーコン	01
C605	UA654100	C.MYLAR	0.01uF 50V			マイラーコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

P.C.B. OPERATION

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	C606	UA654100	C.MYLAR	0.01uF 50V			マイラーコン	01
	C607	US135100	C.CE.CHP	0.1uF 16V			チップセラコン	01
*	D502	VV658700	DIODE.ZENR	RLZ6.2B 6.2V			ツェナーダイオード	
	D551	VV307700	DIODE	1N4002S			ダイオード	01
	D552	VV307700	DIODE	1N4002S			ダイオード	01
	D581	VT332900	DIODE	1SS355			ダイオード	01
	D582	VT332900	DIODE	1SS355			ダイオード	01
	D583	VT332900	DIODE	1SS355			ダイオード	01
	D584	VT332900	DIODE	1SS355			ダイオード	01
	D601	VU172500	DIODE.ZENR	UDZS9.1B			ツェナーダイオード	01
	D602	VT332900	DIODE	1SS355			ダイオード	01
	D603	VT332900	DIODE	1SS355			ダイオード	01
	G571	VR463400	TERM.GND	D3.5			アース端子	01
	IC501	X2874A00	IC	M66003-0101FP FLD			アンプＩＣ	08
	IC551	XP844A00	IC	NJM4556AL			ＩＣ	02
	JK601	V9408200	JACK.PHONE	MSJ-064-05B GR			ホーンジャック	
	PJ581	V7190100	JACK.PIN	3P			ピンジャック 3Ｐ	
	PN501	V3750200	PIN	L=70			スタイルピン	
	PN502	V3750200	PIN	L=70			スタイルピン	
	PN503	V9637500	PIN	L=70 #18			スタイルピン	
	PN504	V3750200	PIN	L=70			スタイルピン	
	Q503	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	Q504	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	Q505	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	Q506	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	Q507	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	Q508	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	Q551	VK432900	TR	2SD1915F S,T			トランジスタ	01
	Q552	VK432900	TR	2SD1915F S,T			トランジスタ	01
	Q553	VK432900	TR	2SD1915F S,T			トランジスタ	01
	Q554	VK432900	TR	2SD1915F S,T			トランジスタ	01
	Q583	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	Q584	VV556400	TR	2SC2412K Q,R,S			トランジスタ	01
	R557	HV755220	R.CAR.FP	220Ω 1/4W			不燃化カーボン抵抗	01
	R558	HV755220	R.CAR.FP	220Ω 1/4W			不燃化カーボン抵抗	01
	R565	HV755100	R.CAR.FP	100Ω 1/4W			不燃化カーボン抵抗	01
	R566	HV755100	R.CAR.FP	100Ω 1/4W			不燃化カーボン抵抗	01
	R597	HV755100	R.CAR.FP	100Ω 1/4W			不燃化カーボン抵抗	01
*	ST581	WA246200	SCR.TERM	3.5			スクリューターミナル	
*	ST582	WA246200	SCR.TERM	3.5			スクリューターミナル	
*	ST601	WA246200	SCR.TERM	3.5			スクリューターミナル	
*	ST611	WA246200	SCR.TERM	3.5			スクリューターミナル	
	SW501	V9266400	SW.RT.ENC	XREB12105PVB25F			ロータリーエンコーダ	02
	SW502	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW503	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW504	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW505	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW506	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW507	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW508	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW509	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW510	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW511	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

P.C.B. OPERATION & P.C.B. VIDEO

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	SW512	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW513	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW514	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW515	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW516	VV020300	SW.TACT	SKQNAA		BG	タクトＳＷ	01
	SW517	VV020300	SW.TACT	SKQNAA		BG	タクトＳＷ	01
	SW518	VV020300	SW.TACT	SKQNAA		BG	タクトＳＷ	01
	SW519	VV020300	SW.TACT	SKQNAA		BG	タクトＳＷ	01
	SW520	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW521	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW522	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW571	VV020300	SW.TACT	SKQNAA			タクトＳＷ	01
	SW576	V9281300	SW.RT.ENC	EVEKD2F3024B			ロータリーエンコーダ	02
	U501	V8444900	L.DTCT	GP1UM271XK			リモコン受光ユニット	04
*	V501	WA531200	FL.DSPLY	HNA-16MM43			螢光表示管	
		V6880300	SHEET				シート／ＦＬ	
		V6007100	SPACER.FL	4.6/10/32			スペーサ　ＦＬ	
*		WA709000	P.C.B.	VIDEO		J	ＰＣＢ　ビデオ	
	CB851	VB858300	CN.BS.PIN	4P		J	コネクタベースポスト	01
	CB852	V7684100	CM	14P SE YKF SERIES		J	D端子コネクタ	
	CB853	V7684100	CM	14P SE YKF SERIES		J	D端子コネクタ	
	CB854	V7684100	CM	14P SE YKF SERIES		J	D端子コネクタ	
	C851	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C852	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C853	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C854	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C855	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C856	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C857	US060800	C.CE.CHP	8pF 50V		J	チップセラコン	01
	C858	US060800	C.CE.CHP	8pF 50V		J	チップセラコン	01
	C859	US060800	C.CE.CHP	8pF 50V		J	チップセラコン	01
	C860	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C861	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C862	US064100	C.CE.M.CHP	0.01uF 50V		J	チップセラコン	01
	C863	US135100	C.CE.CHP	0.1uF 16V		J	チップセラコン	01
	C864	US135100	C.CE.CHP	0.1uF 16V		J	チップセラコン	01
	C865	UR828100	C.EL	100uF 10V		J	ケミコン	01
	C866	UR828100	C.EL	100uF 10V		J	ケミコン	01
	C867	US135100	C.CE.CHP	0.1uF 16V		J	チップセラコン	01
	D851	VT332900	DIODE	1SS355		J	ダイオード	01
	D852	VT332900	DIODE	1SS355		J	ダイオード	01
	D853	VT332900	DIODE	1SS355		J	ダイオード	01
	D854	VT332900	DIODE	1SS355		J	ダイオード	01
	D855	VT332900	DIODE	1SS355		J	ダイオード	01
	D856	VT332900	DIODE	1SS355		J	ダイオード	01
	D857	VT332900	DIODE	1SS355		J	ダイオード	01
	IC851	XY879A00	IC	TC74HC4053AF(EL)		J	ロジックＩＣ　ＳＯＰ	03
	IC852	XY879A00	IC	TC74HC4053AF(EL)		J	ロジックＩＣ　ＳＯＰ	03
	IC853	X2904A00	IC	NJM2581M VIDEO AMP		J	アンプＩＣ　ＳＯＰ	06
	Q851	VV556400	TR	2SC2412K Q,R,S		J	トランジスタ	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. VIDEO & P.C.B. MAIN

	Schm Ref.	PART NO.	Description	Remarks	Markets	部 品 名	Rank
	R872	HV753100	R.CAR.FP 1Ω 1/4W		J	不燃化カーボン抵抗	01
	R873	HV753100	R.CAR.FP 1Ω 1/4W		J	不燃化カーボン抵抗	01
*		WA700400	P.C.B. MAIN	540,5650	J	ＰＣＢ　メイン	
*		WA700500	P.C.B. MAIN	540,5650	UC	ＰＣＢ　メイン	
*		WA700600	P.C.B. MAIN	540,5650	RA	ＰＣＢ　メイン	
*		WB224900	P.C.B. MAIN	540,5650	T	ＰＣＢ　メイン	
*		WA700700	P.C.B. MAIN	540,5650	KBGL	ＰＣＢ　メイン	
	CB101	V7825700	CN 7P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	
*	CB101	VQ962800	CN 7P TE	540,5650	T	ウエハー	
	CB102	V7826500	CN 15P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	01
*	CB102	VQ963600	CN 15P TE	540,5650	T	ウエハー	
	CB103	LB918040	CN.BS.PIN 4P	540,5650		ベース付ポスト	01
	CB104	VF728200	CN.BS.PIN 10P	540,5650		コネクター	01
	CB105	VR428800	CN.BS.PIN 3P	540,5650		ケーブルホルダー	01
	CB107	Vi878100	CN.BS.PIN 3P	540,5650		ケーブルホルダー	01
	CB109	VL844700	CN.BS.PIN 3P	540,5650		ベース付ポスト	01
	CB301	VR428800	CN.BS.PIN 3P	540,5650		ケーブルホルダー	01
	CB302	Vi878100	CN.BS.PIN 3P	540,5650		ケーブルホルダー	01
	CB303	V7825400	CN 4P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	01
*	CB303	VQ962500	CN 4P TE	540,5650	T	ウエハー	
	CB304	VK025600	CN.BS.PIN 12P	540,5650		ワイヤートラップ	01
	CB306	LB932060	CN.BS.PIN 6P	540,5650		ベースポスト	01
*	CB307	WB127100	CN.BS.PIN 3P TE XH	540,5650		ベースツキポスト	
	CB401	V7828200	SOCKET 15P TE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB401	VQ961800	CN 15P SE	540,5650	T	ハウジング	
*	CB403	LB919070	CN.BS.PIN 7P	540,5650		ベース付ポスト	01
	C101	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C102	UU177220	C.EL 22uF 63V	540,5650		ケミコン　ＦＷ	
	C103	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C104	VG291200	C.EL 47uF 50V	540,5650		ケミコン	01
	C105	UR867470	C.EL 47uF 50V	540,5650		ケミコン	01
	C106	UR867470	C.EL 47uF 50V	540,5650		ケミコン	01
	C107	UU196470	C.EL 4.7uF 100V	540,5650		ケミコン　ＦＷ	
*	C108	V8638300	C.PP 150pF 630V	540,5650		ＰＰコン	
	C109	UR337470	C.EL 47uF 16V	540,5650		ケミコン　ＡＳＦ	03
*	C111	V8638300	C.PP 150pF 630V	540,5650		ＰＰコン	
*	C112	V8638300	C.PP 150pF 630V	540,5650		ＰＰコン	
	C113	UR337470	C.EL 47uF 16V	540,5650		ケミコン　ＡＳＦ	03
*	C115	V8638300	C.PP 150pF 630V	540,5650		ＰＰコン	
	C116	UT652150	C.PP 150pF 100V	540,5650		ＰＰコン	01
	C117	UR847470	C.EL 47uF 25V	540,5650		ケミコン	01
	C118	UT652150	C.PP 150pF 100V	540,5650		ＰＰコン	01
	C119	UT652150	C.PP 150pF 100V	540,5650		ＰＰコン	01
	C120	UR847470	C.EL 47uF 25V	540,5650		ケミコン	01
	C121	UT652150	C.PP 150pF 100V	540,5650		ＰＰコン	01
*	C122	V8638300	C.PP 150pF 630V	540,5650		ＰＰコン	
	C123	UR337470	C.EL 47uF 16V	540,5650		ケミコン　ＡＳＦ	03
*	C124	V8638300	C.PP 150pF 630V	540,5650		ＰＰコン	
*	C125	UT654220	C.PP 0.022uF 100V	540,5650		ＰＰコン	01
*	C126	UT654220	C.PP 0.022uF 100V	540,5650		ＰＰコン	01

※ New Parts　＊新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. MAIN

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
	C127	UA654220	C.MYLAR	0.022uF	50V	540,5650		マイラーコン	01
	C128	UA654220	C.MYLAR	0.022uF	50V	540,5650		マイラーコン	01
*	C129	UT654220	C.PP	0.022uF	100V	540,5650		ＰＰコン	01
	C130	V8584600	C.PP	220pF	630V	540,5650		ＰＰコン	
	C131	UR866470	C.EL	4.7uF	50V	540,5650		ケミコン	01
	C132	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
	C133	UR847470	C.EL	47uF	25V	540,5650		ケミコン	01
	C134	VR324900	C.MYLAR	0.1uF	100V	540,5650		マイラーコン	01
	C135	VR324900	C.MYLAR	0.1uF	100V	540,5650		マイラーコン	01
⚠	C137	UR397100	C.EL	10uF	100V	540,5650		ケミコン ＡＳＦ	03
⚠	C138	UR397100	C.EL	10uF	100V	540,5650		ケミコン ＡＳＦ	03
	C301	UR867470	C.EL	47uF	50V	540,5650		ケミコン	01
⚠	C302	UR866470	C.EL	4.7uF	50V	540,5650		ケミコン	01
* ⚠	C303	WA744300	C.EL	10000uF	71V	540,5650		ケミコン	
* ⚠	C304	WA744300	C.EL	10000uF	71V	540,5650		ケミコン	
	C305	UA654100	C.MYLAR	0.01uF	50V	540,5650	RTKABGL	マイラーコン	01
	C306	VG291300	C.EL	100uF	50V	540,5650		ケミコン	01
	C307	VG291300	C.EL	100uF	50V	540,5650		ケミコン	01
	C308	UA654100	C.MYLAR	0.01uF	50V	540,5650	RTKABGL	マイラーコン	01
	C309	UA653470	C.MYLAR	4700pF	50V	540,5650	RTKABGL	マイラーコン	01
	C310	UA653470	C.MYLAR	4700pF	50V	540,5650	RTKABGL	マイラーコン	01
	C311	UA653470	C.MYLAR	4700pF	50V	540,5650	RTKABGL	マイラーコン	01
	C312	UA654100	C.MYLAR	0.01uF	50V	540,5650		マイラーコン	01
	C313	UA654100	C.MYLAR	0.01uF	50V	540,5650	RTKABGL	マイラーコン	01
	C314	VR324900	C.MYLAR	0.1uF	100V	540,5650		マイラーコン	01
	C315	VR324900	C.MYLAR	0.1uF	100V	540,5650		マイラーコン	01
	C316	VR324900	C.MYLAR	0.1uF	100V	540,5650		マイラーコン	01
	C317	VR324900	C.MYLAR	0.1uF	100V	540,5650		マイラーコン	01
	C318	UA653470	C.MYLAR	4700pF	50V	540,5650	RTKABGL	マイラーコン	01
	C319	UA654100	C.MYLAR	0.01uF	50V	540,5650	RTKABGL	マイラーコン	01
	C320	UA654100	C.MYLAR	0.01uF	50V	540,5650	RTKABGL	マイラーコン	01
	C321	UA654220	C.MYLAR	0.022uF	50V	540,5650		マイラーコン	01
	C322	UA654220	C.MYLAR	0.022uF	50V	540,5650	RTKABGL	マイラーコン	01
	C323	UA654220	C.MYLAR	0.022uF	50V	540,5650	RTKABGL	マイラーコン	01
	C324	UA654220	C.MYLAR	0.022uF	50V	540,5650	RTKABGL	マイラーコン	01
*	C325	WB307500	C.EL	330uF	50V	540,5650		ケミコン	
	C326	UA654220	C.MYLAR	0.022uF	50V	540,5650	RTKABGL	マイラーコン	01
	C327	UA654220	C.MYLAR	0.022uF	50V	540,5650	RTKABGL	マイラーコン	01
	C401	VD930900	C.CE.SMI	0.1uF	25V	540,5650		半導体セラコン	01
	C402	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
	C403	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
	C404	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
	C405	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
	C406	UR867470	C.EL	47uF	50V	540,5650		ケミコン	01
	C407	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
	C408	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
	C409	UT652150	C.PP	150pF	100V	540,5650		ＰＰコン	01
	C410	UR847470	C.EL	47uF	25V	540,5650		ケミコン	01
	C411	UT652150	C.PP	150pF	100V	540,5650		ＰＰコン	01
	C412	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
	C413	UR838100	C.EL	100uF	16V	540,5650		ケミコン	01
	C414	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01
	C415	UR877100	C.EL	10uF	63V	540,5650		ケミコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. MAIN

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	C416	UA654220	C.MYLAR	0.022uF 50V	540,5650		マイラーコン	01
* ⚠	C417	WB302800	C.EL	10000uF 16V	540,5650		ケミコン	
* ⚠	C418	WB302800	C.EL	10000uF 16V	540,5650		ケミコン	
* ⚠	C419	WB304400	C.EL	6800uF 25V	540,5650		ケミコン	
* ⚠	C420	WB333600	C.EL	1000uF 25V	540,5650		ケミコン	
* ⚠	C421	WB302800	C.EL	10000uF 16V	540,5650		ケミコン	
*	C422	WB302800	C.EL	10000uF 16V	540,5650		ケミコン	
	C423	VR324900	C.MYLAR	0.1uF 100V	540,5650		マイラーコン	01
	C425	VR324900	C.MYLAR	0.1uF 100V	540,5650		マイラーコン	01
	C427	VR324900	C.MYLAR	0.1uF 100V	540,5650		マイラーコン	01
	C428	VR324900	C.MYLAR	0.1uF 100V	540,5650		マイラーコン	01
	C429	UR866470	C.EL	4.7uF 50V	540,5650		ケミコン	01
	D101	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D102	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D103	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D104	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D105	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D106	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D107	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D108	VN008700	DIODE	1SS270A	540,5650		ダイオード	01
	D109	VN008700	DIODE	1SS270A	540,5650		ダイオード	01
	D110	VN008700	DIODE	1SS270A	540,5650		ダイオード	01
	D111	VN008700	DIODE	1SS270A	540,5650		ダイオード	01
	D112	VN008700	DIODE	1SS270A	540,5650		ダイオード	01
	D113	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D114	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D115	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D116	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D117	VG437200	DIODE.ZENR	MTZJ4.7C 4.7V	540,5650		ツェナーダイオード	01
	D118	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D119	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D120	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D121	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D301	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D302	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D303	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D304	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D305	VG443200	DIODE.ZENR	MTZJ30A 30V	540,5650		ツェナーダイオード	01
	D306	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D307	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D308	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D309	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
* ⚠	D310	WA653200	DIODE.BRG	TS6P03G 6.0A 200V	540,5650		ダイオードブリッジ	
⚠	D311	VS997800	DIODE	1T2	540,5650		ダイオード	01
⚠	D312	VS997800	DIODE	1T2	540,5650		ダイオード	01
⚠	D313	VS997800	DIODE	1T2	540,5650		ダイオード	01
⚠	D314	VS997800	DIODE	1T2	540,5650		ダイオード	01
	D315	VV307700	DIODE	1N4002S	540,5650		ダイオード	01
	D401	WA180300	DIODE	1SS244	540,5650		ダイオード	01
	D402	VN008700	DIODE	1SS270A	540,5650		ダイオード	01
* ⚠	D403	WA653100	DIODE.BRG	KBP103G 1.0A 200V	540,5650		ダイオードブリッジ	
* ⚠	D404	WA653100	DIODE.BRG	KBP103G 1.0A 200V	540,5650		ダイオードブリッジ	
*	D405	VG435500	DIODE.ZENR	MTZJ2.4B 2.4V	540,5650		ツェナーダイオード	

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. MAIN

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	D406	VG435500	DIODE.ZENR	MTZJ2.4B 2.4V	540,5650		ツェナーダイオード	
	D407	VN008700	DIODE	1SS270A	540,5650		ダイオード	01
	G101	VR463400	TERM.GND	D3.5	540,5650		アース端子	01
	G301	VR463400	TERM.GND	D3.5	540,5650		アース端子	01
	G302	V5995800	PLATE.GND		540,5650		アースプレート	
	IC401	X0515A00	IC	LM61CIZ THERMAL	540,5650		電源ＩＣ	
⚠	IC402	XJ608A00	IC	NJM7812FA	540,5650		ＩＣ	02
⚠	IC403	XD343A00	IC	NJM79M12FA	540,5650		ＩＣ	03
⚠	IC404	XJ607A00	IC	NJM7805FA 5V	540,5650		ＩＣ	02
⚠	IC405	XE436A00	IC	NJM79M05FA	540,5650		ＩＣ	03
⚠	IC406	XJ607A00	IC	NJM7805FA 5V	540,5650		ＩＣ	02
	PN301	V9637500	PIN	L=70 #18	540,5650		スタイルピン	
	PN304	V9637500	PIN	L=70 #18	540,5650		スタイルピン	
	PN401	V9637500	PIN	L=70 #18	540,5650		スタイルピン	
	PN402	V9637500	PIN	L=70 #18	540,5650		スタイルピン	
	PN403	V9637500	PIN	L=70 #18	540,5650		スタイルピン	
⚠	Q101	VK432900	TR	2SD1915F S,T	540,5650		トランジスタ	01
⚠	Q102	VK432900	TR	2SD1915F S,T	540,5650		トランジスタ	01
⚠	Q103	VK432900	TR	2SD1915F S,T	540,5650		トランジスタ	01
⚠	Q104	VK432900	TR	2SD1915F S,T	540,5650		トランジスタ	01
⚠	Q105	VK432900	TR	2SD1915F S,T	540,5650		トランジスタ	01
⚠	Q106	VC614000	TR	2SB1274 Q,R,S	540,5650		トランジスタ	02
⚠	Q107	VP883000	TR	2SA893A D,E	540,5650		トランジスタ	01
	Q108	VP883000	TR	2SA893A D,E	540,5650		トランジスタ	01
⚠	Q109	VP872700	TR	2SC4488 S,T	540,5650		トランジスタ	01
⚠	Q110A	iX630850	TR	2SA1695 O,P,Y	540,5650		トランジスタ	04
⚠	Q110C	iX630860	TR	2SC4468 O,P,Y	540,5650		トランジスタ	04
⚠	Q111A	iX630850	TR	2SA1695 O,P,Y	540,5650		トランジスタ	04
⚠	Q111C	iX630860	TR	2SC4468 O,P,Y	540,5650		トランジスタ	04
⚠	Q112A	iX630850	TR	2SA1695 O,P,Y	540,5650		トランジスタ	04
⚠	Q112C	iX630860	TR	2SC4468 O,P,Y	540,5650		トランジスタ	04
⚠	Q113A	iX630850	TR	2SA1695 O,P,Y	540,5650		トランジスタ	04
⚠	Q113C	iX630860	TR	2SC4468 O,P,Y	540,5650		トランジスタ	04
⚠	Q114A	iX630850	TR	2SA1695 O,P,Y	540,5650		トランジスタ	04
⚠	Q114C	iX630860	TR	2SC4468 O,P,Y	540,5650		トランジスタ	04
⚠	Q115	VP872600	TR	2SA1708 S,T	540,5650		トランジスタ	01
⚠	Q117	VP872700	TR	2SC4488 S,T	540,5650		トランジスタ	01
⚠	Q119	VP872600	TR	2SA1708 S,T	540,5650		トランジスタ	01
⚠	Q121	VP872700	TR	2SC4488 S,T	540,5650		トランジスタ	01
⚠	Q122	VP872600	TR	2SA1708 S,T	540,5650		トランジスタ	01
⚠	Q123	VP872600	TR	2SA1708 S,T	540,5650		トランジスタ	01
⚠	Q124	VP872700	TR	2SC4488 S,T	540,5650		トランジスタ	01
⚠	Q125	VP872700	TR	2SC4488 S,T	540,5650		トランジスタ	01
⚠	Q128	VP872600	TR	2SA1708 S,T	540,5650		トランジスタ	01
	Q129	iC1815I0	TR	2SC1815 Y	540,5650		トランジスタ	01
	Q130	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q131	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q132	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q134	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q135	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q136	VP883000	TR	2SA893A D,E	540,5650		トランジスタ	01
	Q137	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q138	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01

＊New Parts ＊新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. MAIN

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
	Q301	iC1815I0	TR	2SC1815 Y		540,5650		トランジスタ	01
⚠	Q302	iA1015I0	TR	2SA1015 Y		540,5650		トランジスタ	01
	Q305	iC1815I0	TR	2SC1815 Y		540,5650		トランジスタ	01
	Q306	iC1815I0	TR	2SC1815 Y		540,5650		トランジスタ	01
⚠	Q401	iC224030	TR	2SC2240 GR,BL		540,5650		トランジスタ	01
⚠	Q402	VP872700	TR	2SC4488 S,T		540,5650		トランジスタ	01
⚠	Q403A	iX630850	TR	2SA1695 O,P,Y		540,5650		トランジスタ	04
⚠	Q403C	iX630860	TR	2SC4468 O,P,Y		540,5650		トランジスタ	04
⚠	Q404	VP872600	TR	2SA1708 S,T		540,5650		トランジスタ	01
	Q406	VP883100	TR	2SC1890A D,E		540,5650		トランジスタ	01
	Q407	VP883100	TR	2SC1890A D,E		540,5650		トランジスタ	01
	R102	VP941500	R.MTL.OXD	4.7KΩ	1W	540,5650		酸化金属被膜抵抗	01
	R103	VP941500	R.MTL.OXD	4.7KΩ	1W	540,5650	JRTKABGL	酸化金属被膜抵抗	01
	R103	VP941600	R.MTL.OXD	5.6KΩ	1W	540,5650	UC	酸化金属被膜抵抗	01
	R105	HV755100	R.CAR.FP	100Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R106	HL006270	R.MTL.OXD	2.7KΩ	1/2W	540,5650		酸化金属被膜抵抗	
*	R107	HL005330	R.MTL.OXD	330Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R108	HL005820	R.MTL.OXD	820Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R109	HL006100	R.MTL.OXD	1KΩ	1/2W	540,5650		酸化金属被膜抵抗	
	R110	VP941500	R.MTL.OXD	4.7KΩ	1W	540,5650	JRTKABGL	酸化金属被膜抵抗	01
	R110	VP941600	R.MTL.OXD	5.6KΩ	1W	540,5650	UC	酸化金属被膜抵抗	01
	R111	VP941500	R.MTL.OXD	4.7KΩ	1W	540,5650		酸化金属被膜抵抗	01
	R112	HV755100	R.CAR.FP	100Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R113	HL006270	R.MTL.OXD	2.7KΩ	1/2W	540,5650		酸化金属被膜抵抗	
*	R114	HL005330	R.MTL.OXD	330Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R115	HL005820	R.MTL.OXD	820Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R116	HL006100	R.MTL.OXD	1KΩ	1/2W	540,5650		酸化金属被膜抵抗	
	R117	VP941500	R.MTL.OXD	4.7KΩ	1W	540,5650	JRTKABGL	酸化金属被膜抵抗	01
	R117	VP941600	R.MTL.OXD	5.6KΩ	1W	540,5650	UC	酸化金属被膜抵抗	01
	R118	VP941500	R.MTL.OXD	4.7KΩ	1W	540,5650		酸化金属被膜抵抗	01
	R119	HV755100	R.CAR.FP	100Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R120	HL006270	R.MTL.OXD	2.7KΩ	1/2W	540,5650		酸化金属被膜抵抗	
*	R121	HL005330	R.MTL.OXD	330Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R122	HL006100	R.MTL.OXD	1KΩ	1/2W	540,5650		酸化金属被膜抵抗	
	R123	HL005820	R.MTL.OXD	820Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R124	V8072000	R.MTL.OXD	4.7KΩ	1W	540,5650	JRTKABGL	酸化金属被膜抵抗	
	R124	V8072100	R.MTL.OXD	5.6KΩ	1W	540,5650	UC	酸化金属被膜抵抗	
	R125	V8072000	R.MTL.OXD	4.7KΩ	1W	540,5650		酸化金属被膜抵抗	
	R126	HV755100	R.CAR.FP	100Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R127	HL006270	R.MTL.OXD	2.7KΩ	1/2W	540,5650		酸化金属被膜抵抗	
*	R128	HL005330	R.MTL.OXD	330Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R129	HL006100	R.MTL.OXD	1KΩ	1/2W	540,5650		酸化金属被膜抵抗	
	R130	HL005820	R.MTL.OXD	820Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R131	V8072000	R.MTL.OXD	4.7KΩ	1W	540,5650	JRTKABGL	酸化金属被膜抵抗	
	R131	V8072100	R.MTL.OXD	5.6KΩ	1W	540,5650	UC	酸化金属被膜抵抗	
	R132	V8072000	R.MTL.OXD	4.7KΩ	1W	540,5650		酸化金属被膜抵抗	
	R133	HV755100	R.CAR.FP	100Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R134	HL006270	R.MTL.OXD	2.7KΩ	1/2W	540,5650		酸化金属被膜抵抗	
*	R135	HL005330	R.MTL.OXD	330Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R136	HL006100	R.MTL.OXD	1KΩ	1/2W	540,5650		酸化金属被膜抵抗	
	R137	HL005820	R.MTL.OXD	820Ω	1/2W	540,5650		酸化金属被膜抵抗	
⚠	R140	HV754100	R.CAR.FP	10Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R142	VP939700	R.MTL.FLM	4.7Ω	1W	540,5650		金属被膜抵抗	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. MAIN

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
⚠	R143	VP940600	R.MTL.OXD	220Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R146	VP939700	R.MTL.FLM	4.7Ω	1W	540,5650		金属被膜抵抗	01
⚠	R147	VP939700	R.MTL.FLM	4.7Ω	1W	540,5650		金属被膜抵抗	01
⚠	R148	VP940600	R.MTL.OXD	220Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R150	VP939700	R.MTL.FLM	4.7Ω	1W	540,5650		金属被膜抵抗	01
⚠	R152	V8071100	R.MTL.FLM	220Ω	1W	540,5650		金属被膜抵抗	
⚠	R153	HV754100	R.CAR.FP	10Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R154	HV754100	R.CAR.FP	10Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R155	HV754100	R.CAR.FP	10Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R156	V8071100	R.MTL.FLM	220Ω	1W	540,5650		金属被膜抵抗	
⚠	R157	HV754100	R.CAR.FP	10Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R158	VP939800	R.MTL.OXD	10Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R159	VP940600	R.MTL.OXD	220Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R160	VP939800	R.MTL.OXD	10Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R162	HV756150	R.CAR.FP	1.5KΩ	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R164	V3873200	R.WW	0.22Ω	3W	540,5650		セメント抵抗	02
⚠	R168	V3873200	R.WW	0.22Ω	3W	540,5650		セメント抵抗	02
* ⚠	R175	WB279900	R.WW	RGC55C	0.22+0.22	540,5650		セメント抵抗	
* ⚠	R177	WB279900	R.WW	RGC55C	0.22+0.22	540,5650		セメント抵抗	
⚠	R181	V3873200	R.WW	0.22Ω	3W	540,5650		セメント抵抗	02
⚠	R188	VP939800	R.MTL.OXD	10Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R192	VP939800	R.MTL.OXD	10Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R196	V8070300	R.MTL.FLM	10Ω	1W	540,5650		金属被膜抵抗	
⚠	R200	V8070300	R.MTL.FLM	10Ω	1W	540,5650		金属被膜抵抗	
⚠	R204	VP939800	R.MTL.OXD	10Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R208	VP939700	R.MTL.FLM	4.7Ω	1W	540,5650		金属被膜抵抗	01
⚠	R220	VP939700	R.MTL.FLM	4.7Ω	1W	540,5650		金属被膜抵抗	01
⚠	R221	VP939700	R.MTL.FLM	4.7Ω	1W	540,5650		金属被膜抵抗	01
	R222	HV754100	R.CAR.FP	10Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R223	HV754100	R.CAR.FP	10Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R228	HV753100	R.CAR.FP	1Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R301	VP940800	R.MTL.OXD	470Ω	1W	540,5650		酸化金属被膜抵抗	01
	R302	VP940800	R.MTL.OXD	470Ω	1W	540,5650		酸化金属被膜抵抗	01
⚠	R306	HV755100	R.CAR.FP	100Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R307	HV756100	R.CAR.FP	1KΩ	1/4W	540,5650		不燃化カーボン抵抗	01
	R314	VP940800	R.MTL.OXD	470Ω	1W	540,5650		酸化金属被膜抵抗	01
	R315	VP940800	R.MTL.OXD	470Ω	1W	540,5650		酸化金属被膜抵抗	01
	R328	HV753100	R.CAR.FP	1Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R329	HV753100	R.CAR.FP	1Ω	1/4W	540,5650		不燃化カーボン抵抗	01
	R333	HV753470	R.CAR.FP	4.7Ω	1/4W	540,5650	RTKABGL	不燃化カーボン抵抗	01
	R334	HV753470	R.CAR.FP	4.7Ω	1/4W	540,5650	RTKABGL	不燃化カーボン抵抗	01
	R336	HV753470	R.CAR.FP	4.7Ω	1/4W	540,5650	RTKABGL	不燃化カーボン抵抗	01
	R337	HV753470	R.CAR.FP	4.7Ω	1/4W	540,5650	RTKABGL	不燃化カーボン抵抗	01
	R338	HV753470	R.CAR.FP	4.7Ω	1/4W	540,5650	RTKABGL	不燃化カーボン抵抗	01
	R401	HL006270	R.MTL.OXD	2.7KΩ	1/2W	540,5650		酸化金属被膜抵抗	
*	R402	HL005270	R.MTL.OXD	270Ω	1/2W	540,5650		酸化金属被膜抵抗	
	R403	HL006100	R.MTL.OXD	1KΩ	1/2W	540,5650		酸化金属被膜抵抗	
	R404	HL006100	R.MTL.OXD	1KΩ	1/2W	540,5650		酸化金属被膜抵抗	
	R405	V8072000	R.MTL.OXD	4.7KΩ	1W	540,5650	JRTKABGL	酸化金属被膜抵抗	
	R405	V8072100	R.MTL.OXD	5.6KΩ	1W	540,5650	UC	酸化金属被膜抵抗	
	R406	V8072000	R.MTL.OXD	4.7KΩ	1W	540,5650		酸化金属被膜抵抗	
	R407	HV755100	R.CAR.FP	100Ω	1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R408	HV753100	R.CAR.FP	1Ω	1/4W	540,5650		不燃化カーボン抵抗	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. MAIN

	Schm Ref.	PART NO.	Description	Remarks	Markets	部 品 名	Rank
⚠	R409	HV753100	R.CAR.FP 1Ω 1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R410	V8071100	R.MTL.FLM 220Ω 1W	540,5650		金属被膜抵抗	
⚠	R411	HV754100	R.CAR.FP 10Ω 1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R412	HV754100	R.CAR.FP 10Ω 1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R413	V8070000	R.MTL.FLM 1Ω 1W	540,5650		金属被膜抵抗	
⚠	R414	V8070000	R.MTL.FLM 1Ω 1W	540,5650		金属被膜抵抗	
* ⚠	R416	WB279900	R.WW RGC55C 0.22+0.22	540,5650		セメント抵抗	
⚠	R421	V8070300	R.MTL.FLM 10Ω 1W	540,5650		金属被膜抵抗	
	R423	V8070000	R.MTL.FLM 1Ω 1W	540,5650		金属被膜抵抗	
	R424	V8070000	R.MTL.FLM 1Ω 1W	540,5650		金属被膜抵抗	
*	RY301	WA544800	RELAY DC G5PA-28	540,5650		リレー ２４Ｖ	
*	RY302	WA544800	RELAY DC G5PA-28	540,5650		リレー ２４Ｖ	
*	RY303	WA544800	RELAY DC G5PA-28	540,5650		リレー ２４Ｖ	
*	RY304	WA544800	RELAY DC G5PA-28	540,5650		リレー ２４Ｖ	
	ST101	V4040500	SCR.TERM M3	540,5650		スクリュー／ターミナル	01
	ST301	V4040500	SCR.TERM M3	540,5650		スクリュー／ターミナル	01
⚠	SW301	V4104200	SW.SLIDE SL13B-022-AMCS	540,5650	UCRTKABGL	スライドＳＷ	03
*	TE301	V5912200	TERM.SP 8P LTS0810	540,5650	KBGL	スピーカーターミナル ８Ｐ	
	TE301	V6771200	TERM.SP 8P LTS0810	540,5650	JUCRTA	スピーカーターミナル ８Ｐ	06
*	TE302	V5912200	TERM.SP 8P LTS0810	540,5650	KBGL	スピーカーターミナル ８Ｐ	
	TE302	V6771200	TERM.SP 8P LTS0810	540,5650	JUCRTA	スピーカーターミナル ８Ｐ	06
		EP600140	SCR.BND.HD 3x10 MFZN2BL	540,5650		バインドＢタイトネジ	01
*		WA700800	P.C.B. MAIN	440,5640	J	ＰＣＢ メイン	
*		WA700900	P.C.B. MAIN	440,5640	UC	ＰＣＢ メイン	
*		WA701000	P.C.B. MAIN	440,5640	RA	ＰＣＢ メイン	
*		WB225000	P.C.B. MAIN	440,5640	T	ＰＣＢ メイン	
*		WA701100	P.C.B. MAIN	440,5640	KBGL	ＰＣＢ メイン	
	CB101	V7825700	CN 7P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	
*	CB101	VQ962800	CN 7P TE	440,5640	T	ウエハー	
	CB102	V7826500	CN 15P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	01
*	CB102	VQ963600	CN 15P TE	440,5640	T	ウエハー	
	CB103	LB918040	CN.BS.PIN 4P	440,5640		ベース付ポスト	01
	CB104	VF728200	CN.BS.PIN 10P	440,5640		コネクター	01
	CB105	VR428800	CN.BS.PIN 3P	440,5640		ケーブルホルダー	01
	CB107	Vi878100	CN.BS.PIN 3P	440,5640		ケーブルホルダー	01
	CB109	VL844700	CN.BS.PIN 3P	440,5640		ベース付ポスト	01
	CB301	VR428800	CN.BS.PIN 3P	440,5640		ケーブルホルダー	01
	CB302	Vi878100	CN.BS.PIN 3P	440,5640		ケーブルホルダー	01
	CB303	V7825400	CN 4P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	01
*	CB303	VQ962500	CN 4P TE	440,5640	T	ウエハー	
	CB304	VK025600	CN.BS.PIN 12P	440,5640		ワイヤートラップ	01
	CB306	LB932060	CN.BS.PIN 6P	440,5640		ベースポスト	01
*	CB307	WB127100	CN.BS.PIN 3P TE XH	440,5640		ベースツキポスト	
	CB401	V7828200	SOCKET 15P TE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB401	VQ961800	CN 15P SE	440,5640	T	ハウジング	
*	CB403	LB919070	CN.BS.PIN 7P	440,5640		ベース付ポスト	01
	C101	VG291200	C.EL 47uF 50V	440,5640		ケミコン	01
	C102	UR877220	C.EL 22uF 63V	440,5640		ケミコン	01
	C103	VG291200	C.EL 47uF 50V	440,5640		ケミコン	01
	C104	VG291200	C.EL 47uF 50V	440,5640		ケミコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. MAIN

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
	C105	UR867470	C.EL	47uF	50V	440,5640		ケミコン	01
	C106	UR867470	C.EL	47uF	50V	440,5640		ケミコン	01
	C107	UR896470	C.EL	4.7uF	100V	440,5640		ケミコン	01
	C108	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C109	UR337470	C.EL	47uF	16V	440,5640	JKBGL	ケミコン　ＡＳＦ	03
	C109	UR837470	C.EL	47uF	16V	440,5640	UCRTA	ケミコン	01
	C111	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C112	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C113	UR337470	C.EL	47uF	16V	440,5640	JKBGL	ケミコン　ＡＳＦ	03
	C113	UR837470	C.EL	47uF	16V	440,5640	UCRTA	ケミコン	01
	C115	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C116	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C117	UR847470	C.EL	47uF	25V	440,5640		ケミコン	01
	C118	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C119	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C120	UR847470	C.EL	47uF	25V	440,5640		ケミコン	01
	C121	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C122	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
	C123	UR337470	C.EL	47uF	16V	440,5640	JKBGL	ケミコン　ＡＳＦ	03
	C123	UR837470	C.EL	47uF	16V	440,5640	UCRTA	ケミコン	01
	C124	UT652150	C.PP	150pF	100V	440,5640		ＰＰコン	01
*	C125	UA354220	C.MYLAR	0.022uF	50V	440,5640	UCRTA	マイラーコン	
*	C125	VR324700	C.MYLAR	0.022uF	100V	440,5640	JKBGL	マイラーコン	
*	C126	UA354220	C.MYLAR	0.022uF	50V	440,5640	UCRTA	マイラーコン	
*	C126	VR324700	C.MYLAR	0.022uF	100V	440,5640	JKBGL	マイラーコン	
*	C127	UA354220	C.MYLAR	0.022uF	50V	440,5640		マイラーコン	
*	C128	UA354220	C.MYLAR	0.022uF	50V	440,5640		マイラーコン	
*	C129	UA354220	C.MYLAR	0.022uF	50V	440,5640	UCRTA	マイラーコン	
*	C129	VR324700	C.MYLAR	0.022uF	100V	440,5640	JKBGL	マイラーコン	
	C130	V8584600	C.PP	220pF	630V	440,5640		ＰＰコン	
	C131	UR866470	C.EL	4.7uF	50V	440,5640		ケミコン	01
	C132	UR838100	C.EL	100uF	16V	440,5640		ケミコン	01
	C133	UR847470	C.EL	47uF	25V	440,5640		ケミコン	01
	C134	VR324900	C.MYLAR	0.1uF	100V	440,5640		マイラーコン	01
	C135	VR324900	C.MYLAR	0.1uF	100V	440,5640		マイラーコン	01
⚠	C137	UR397100	C.EL	10uF	100V	440,5640	JKBGL	ケミコン　ＡＳＦ	03
⚠	C137	UR897100	C.EL	10uF	100V	440,5640	UCRTA	ケミコン	01
⚠	C138	UR397100	C.EL	10uF	100V	440,5640	JKBGL	ケミコン　ＡＳＦ	03
⚠	C138	UR897100	C.EL	10uF	100V	440,5640	UCRTA	ケミコン	01
	C301	UR867470	C.EL	47uF	50V	440,5640		ケミコン	01
⚠	C302	UR866470	C.EL	4.7uF	50V	440,5640		ケミコン	01
⚠	C303	V4926300	C.EL	8200uF	63V	440,5640	UCRTA	ケミコン	
* ⚠	C303	WB127200	C.EL	8200uF	71V	440,5640	JKBGL	ケミコン	
* ⚠	C303	WB127200	C.EL	8200uF	71V	440,5640		ケミコン	
⚠	C304	V4926300	C.EL	8200uF	63V	440,5640	UCRTA	ケミコン	
*	C304	WB127200	C.EL	8200uF	71V	440,5640	JKBGL	ケミコン	
	C305	UA654100	C.MYLAR	0.01uF	50V	440,5640	RTKABGL	マイラーコン	01
	C306	VG291300	C.EL	100uF	50V	440,5640		ケミコン	01
	C307	VG291300	C.EL	100uF	50V	440,5640		ケミコン	01
	C308	UA654100	C.MYLAR	0.01uF	50V	440,5640	RTKABGL	マイラーコン	01
	C309	UA653470	C.MYLAR	4700pF	50V	440,5640	RTKABGL	マイラーコン	01
	C310	UA653470	C.MYLAR	4700pF	50V	440,5640	RTKABGL	マイラーコン	01
	C311	UA653470	C.MYLAR	4700pF	50V	440,5640	RTKABGL	マイラーコン	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. MAIN

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	C312	UA654100	C.MYLAR	0.01uF 50V	440,5640		マイラーコン	01
	C313	UA654100	C.MYLAR	0.01uF 50V	440,5640	RTKABGL	マイラーコン	01
	C314	VR324900	C.MYLAR	0.1uF 100V	440,5640		マイラーコン	01
	C315	VR324900	C.MYLAR	0.1uF 100V	440,5640		マイラーコン	01
	C316	VR324900	C.MYLAR	0.1uF 100V	440,5640		マイラーコン	01
	C317	VR324900	C.MYLAR	0.1uF 100V	440,5640		マイラーコン	01
	C318	UA653470	C.MYLAR	4700pF 50V	440,5640	RTKABGL	マイラーコン	01
	C319	UA654100	C.MYLAR	0.01uF 50V	440,5640	RTKABGL	マイラーコン	01
	C320	UA654100	C.MYLAR	0.01uF 50V	440,5640	RTKABGL	マイラーコン	01
	C320	UA654100	C.MYLAR	0.01uF 50V	440,5640		マイラーコン	01
	C321	UA654220	C.MYLAR	0.022uF 50V	440,5640		マイラーコン	01
	C322	UA654220	C.MYLAR	0.022uF 50V	440,5640	RTKABGL	マイラーコン	01
	C323	UA654220	C.MYLAR	0.022uF 50V	440,5640	RTKABGL	マイラーコン	01
	C324	UA654220	C.MYLAR	0.022uF 50V	440,5640	RTKABGL	マイラーコン	01
*	C325	WB307500	C.EL	330uF 50V	440,5640		ケミコン	
	C326	UA654220	C.MYLAR	0.022uF 50V	440,5640	RTKABGL	マイラーコン	01
	C327	UA654220	C.MYLAR	0.022uF 50V	440,5640	RTKABGL	マイラーコン	01
	C401	VD930900	C.CE.SMI	0.1uF 25V	440,5640		半導体セラコン	01
	C402	UR838100	C.EL	100uF 16V	440,5640		ケミコン	01
	C403	UR838100	C.EL	100uF 16V	440,5640		ケミコン	01
	C404	UR877100	C.EL	10uF 63V	440,5640		ケミコン	01
	C405	UR877100	C.EL	10uF 63V	440,5640		ケミコン	01
	C406	UR867470	C.EL	47uF 50V	440,5640		ケミコン	01
	C407	UR838100	C.EL	100uF 16V	440,5640		ケミコン	01
	C408	UR838100	C.EL	100uF 16V	440,5640		ケミコン	01
	C409	UT652150	C.PP	150pF 100V	440,5640		ＰＰコン	01
	C410	UR847470	C.EL	47uF 25V	440,5640		ケミコン	01
	C411	UT652150	C.PP	150pF 100V	440,5640		ＰＰコン	01
	C412	UR877100	C.EL	10uF 63V	440,5640		ケミコン	01
	C413	UR838100	C.EL	100uF 16V	440,5640		ケミコン	01
	C414	UR877100	C.EL	10uF 63V	440,5640		ケミコン	01
	C415	UR877100	C.EL	10uF 63V	440,5640		ケミコン	01
*	C416	UA354220	C.MYLAR	0.022uF 50V	440,5640		マイラーコン	
* ⚠	C417	WB302800	C.EL	10000uF 16V	440,5640		ケミコン	
* ⚠	C418	WB302800	C.EL	10000uF 16V	440,5640		ケミコン	
* ⚠	C419	WB304400	C.EL	6800uF 25V	440,5640		ケミコン	
* ⚠	C420	WB333600	C.EL	1000uF 25V	440,5640		ケミコン	
* ⚠	C421	WB302800	C.EL	10000uF 16V	440,5640		ケミコン	
*	C422	WB302800	C.EL	10000uF 16V	440,5640		ケミコン	
*	C423	UA354220	C.MYLAR	0.022uF 50V	440,5640		マイラーコン	
*	C425	UA354220	C.MYLAR	0.022uF 50V	440,5640		マイラーコン	
	C427	VR324900	C.MYLAR	0.1uF 100V	440,5640		マイラーコン	01
	C428	VR324900	C.MYLAR	0.1uF 100V	440,5640		マイラーコン	01
	C429	UR866470	C.EL	4.7uF 50V	440,5640		ケミコン	01
	D101	VD631600	DIODE	1SS133,176	440,5640		ダイオード	01
	D102	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D103	VD631600	DIODE	1SS133,176	440,5640		ダイオード	01
	D104	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D105	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D106	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D107	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D108	VN008700	DIODE	1SS270A	440,5640		ダイオード	01
	D109	VN008700	DIODE	1SS270A	440,5640		ダイオード	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. MAIN

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	D110	VN008700	DIODE	1SS270A	440,5640		ダイオード	01
	D111	VN008700	DIODE	1SS270A	440,5640		ダイオード	01
	D112	VN008700	DIODE	1SS270A	440,5640		ダイオード	01
	D113	VD631600	DIODE	1SS133,176	440,5640		ダイオード	01
	D114	VD631600	DIODE	1SS133,176	440,5640		ダイオード	01
	D115	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D116	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D117	VG437200	DIODE.ZENR	MTZJ4.7C 4.7V	440,5640		ツェナーダイオード	01
	D118	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D119	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D120	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D121	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D301	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
	D302	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
	D303	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
	D304	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
	D305	VG443200	DIODE.ZENR	MTZJ30A 30V	440,5640		ツェナーダイオード	01
	D306	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
	D307	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
	D308	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
	D309	VG440300	DIODE.ZENR	MTZJ12C 12V	440,5640		ツェナーダイオード	01
* ⚠	D310	WA653200	DIODE.BRG	TS6P03G 6.0A 200V	440,5640		ダイオードブリッジ	
⚠	D311	VS997800	DIODE	1T2	440,5640		ダイオード	01
⚠	D312	VS997800	DIODE	1T2	440,5640		ダイオード	01
⚠	D313	VS997800	DIODE	1T2	440,5640		ダイオード	01
⚠	D314	VS997800	DIODE	1T2	440,5640		ダイオード	01
	D315	VV307700	DIODE	1N4002S	440,5640		ダイオード	01
	D401	WA180300	DIODE	1SS244	440,5640		ダイオード	01
	D402	VN008700	DIODE	1SS270A	440,5640		ダイオード	01
* ⚠	D403	WA653100	DIODE.BRG	KBP103G 1.0A 200V	440,5640		ダイオードブリッジ	
* ⚠	D404	WA653100	DIODE.BRG	KBP103G 1.0A 200V	440,5640		ダイオードブリッジ	
*	D405	VG435500	DIODE.ZENR	MTZJ2.4B 2.4V	440,5640		ツェナーダイオード	
*	D406	VG435500	DIODE.ZENR	MTZJ2.4B 2.4V	440,5640		ツェナーダイオード	
	D407	VN008700	DIODE	1SS270A	440,5640		ダイオード	01
	G101	VR463400	TERM.GND	D3.5	440,5640		アース端子	01
	G301	VR463400	TERM.GND	D3.5	440,5640		アース端子	01
	G302	V5995800	PLATE.GND		440,5640		アースプレート	
	IC401	X0515A00	IC	LM61CIZ THERMAL	440,5640		電源ＩＣ	
⚠	IC402	XJ608A00	IC	NJM7812FA	440,5640		ＩＣ	02
⚠	IC403	XD343A00	IC	NJM79M12FA	440,5640		ＩＣ	03
⚠	IC404	XJ607A00	IC	NJM7805FA 5V	440,5640		ＩＣ	02
⚠	IC405	XE436A00	IC	NJM79M05FA	440,5640		ＩＣ	03
⚠	IC406	XJ607A00	IC	NJM7805FA 5V	440,5640		ＩＣ	02
	PN301	V9637500	PIN	L=70 #18	440,5640		スタイルピン	
	PN304	V9637500	PIN	L=70 #18	440,5640		スタイルピン	
	PN401	V9637500	PIN	L=70 #18	440,5640		スタイルピン	
	PN402	V9637500	PIN	L=70 #18	440,5640		スタイルピン	
	PN403	V9637500	PIN	L=70 #18	440,5640		スタイルピン	
⚠	Q101	VK432900	TR	2SD1915F S,T	440,5640		トランジスタ	01
⚠	Q102	VK432900	TR	2SD1915F S,T	440,5640		トランジスタ	01
⚠	Q103	VK432900	TR	2SD1915F S,T	440,5640		トランジスタ	01
⚠	Q104	VK432900	TR	2SD1915F S,T	440,5640		トランジスタ	01
⚠	Q105	VK432900	TR	2SD1915F S,T	440,5640		トランジスタ	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. MAIN

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
⚠	Q106	VC614000	TR	2SB1274 Q,R,S	440,5640		トランジスタ	02
⚠	Q107	VP883000	TR	2SA893A D,E	440,5640		トランジスタ	01
	Q108	VP883000	TR	2SA893A D,E	440,5640		トランジスタ	01
⚠	Q109	VP872700	TR	2SC4488 S,T	440,5640		トランジスタ	01
⚠	Q110A	iX630850	TR	2SA1695 O,P,Y	440,5640		トランジスタ	04
⚠	Q110C	iX630860	TR	2SC4468 O,P,Y	440,5640		トランジスタ	04
⚠	Q111A	iX630850	TR	2SA1695 O,P,Y	440,5640		トランジスタ	04
⚠	Q111C	iX630860	TR	2SC4468 O,P,Y	440,5640		トランジスタ	04
⚠	Q112A	iX630850	TR	2SA1695 O,P,Y	440,5640		トランジスタ	04
⚠	Q112C	iX630860	TR	2SC4468 O,P,Y	440,5640		トランジスタ	04
⚠	Q113A	iX630850	TR	2SA1695 O,P,Y	440,5640		トランジスタ	04
⚠	Q113C	iX630860	TR	2SC4468 O,P,Y	440,5640		トランジスタ	04
⚠	Q114A	iX630850	TR	2SA1695 O,P,Y	440,5640		トランジスタ	04
⚠	Q114C	iX630860	TR	2SC4468 O,P,Y	440,5640		トランジスタ	04
⚠	Q115	VP872600	TR	2SA1708 S,T	440,5640		トランジスタ	01
⚠	Q117	VP872700	TR	2SC4488 S,T	440,5640		トランジスタ	01
⚠	Q119	VP872600	TR	2SA1708 S,T	440,5640		トランジスタ	01
⚠	Q121	VP872700	TR	2SC4488 S,T	440,5640		トランジスタ	01
⚠	Q122	VP872600	TR	2SA1708 S,T	440,5640		トランジスタ	01
⚠	Q123	VP872600	TR	2SA1708 S,T	440,5640		トランジスタ	01
⚠	Q124	VP872700	TR	2SC4488 S,T	440,5640		トランジスタ	01
⚠	Q125	VP872700	TR	2SC4488 S,T	440,5640		トランジスタ	01
⚠	Q128	VP872600	TR	2SA1708 S,T	440,5640		トランジスタ	01
	Q129	iC181510	TR	2SC1815 Y	440,5640		トランジスタ	01
	Q130	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q131	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q132	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q134	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q135	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q136	VP883000	TR	2SA893A D,E	440,5640		トランジスタ	01
	Q137	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q138	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q301	iC181510	TR	2SC1815 Y	440,5640		トランジスタ	01
⚠	Q302	iA101510	TR	2SA1015 Y	440,5640		トランジスタ	01
	Q305	iC181510	TR	2SC1815 Y	440,5640		トランジスタ	01
	Q306	iC181510	TR	2SC1815 Y	440,5640		トランジスタ	01
⚠	Q401	iC224030	TR	2SC2240 GR,BL	440,5640		トランジスタ	01
⚠	Q402	VP872700	TR	2SC4488 S,T	440,5640		トランジスタ	01
⚠	Q403A	iX630850	TR	2SA1695 O,P,Y	440,5640		トランジスタ	04
⚠	Q403C	iX630860	TR	2SC4468 O,P,Y	440,5640		トランジスタ	04
⚠	Q404	VP872600	TR	2SA1708 S,T	440,5640		トランジスタ	01
	Q406	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	Q407	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
	R102	VP941500	R.MTL.OXD	4.7KΩ 1W	440,5640		酸化金属被膜抵抗	01
	R103	VP941500	R.MTL.OXD	4.7KΩ 1W	440,5640		酸化金属被膜抵抗	01
	R103	VP941500	R.MTL.OXD	4.7KΩ 1W	440,5640	JRTKABGL	酸化金属被膜抵抗	01
	R103	VP941600	R.MTL.OXD	5.6KΩ 1W	440,5640	UC	酸化金属被膜抵抗	01
	R105	HV755100	R.CAR.FP	100Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R106	HL006270	R.MTL.OXD	2.7KΩ 1/2W	440,5640		酸化金属被膜抵抗	
*	R107	HL005330	R.MTL.OXD	330Ω 1/2W	440,5640		酸化金属被膜抵抗	
	R108	HL005820	R.MTL.OXD	820Ω 1/2W	440,5640		酸化金属被膜抵抗	
	R109	HL006100	R.MTL.OXD	1KΩ 1/2W	440,5640		酸化金属被膜抵抗	
	R110	VP941500	R.MTL.OXD	4.7KΩ 1W	440,5640		酸化金属被膜抵抗	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. MAIN

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
	R110	VP941500	R.MTL.OXD	4.7KΩ	1W	440,5640	JRTKABGL	酸化金属被膜抵抗	01
	R110	VP941600	R.MTL.OXD	5.6KΩ	1W	440,5640	UC	酸化金属被膜抵抗	01
	R111	VP941500	R.MTL.OXD	4.7KΩ	1W	440,5640		酸化金属被膜抵抗	01
	R112	HV755100	R.CAR.FP	100Ω	1/4W	440,5640		不燃化カーボン抵抗	01
	R113	HL006270	R.MTL.OXD	2.7KΩ	1/2W	440,5640		酸化金属被膜抵抗	
*	R114	HL005330	R.MTL.OXD	330Ω	1/2W	440,5640		酸化金属被膜抵抗	
	R115	HL005820	R.MTL.OXD	820Ω	1/2W	440,5640		酸化金属被膜抵抗	
	R116	HL006100	R.MTL.OXD	1KΩ	1/2W	440,5640		酸化金属被膜抵抗	
	R117	VP941500	R.MTL.OXD	4.7KΩ	1W	440,5640	JRTKABGL	酸化金属被膜抵抗	01
	R117	VP941600	R.MTL.OXD	5.6KΩ	1W	440,5640	UC	酸化金属被膜抵抗	01
	R118	VP941500	R.MTL.OXD	4.7KΩ	1W	440,5640		酸化金属被膜抵抗	01
	R119	HV755100	R.CAR.FP	100Ω	1/4W	440,5640		不燃化カーボン抵抗	01
	R120	HL006270	R.MTL.OXD	2.7KΩ	1/2W	440,5640		酸化金属被膜抵抗	
*	R121	HL005330	R.MTL.OXD	330Ω	1/2W	440,5640		酸化金属被膜抵抗	
	R122	HL006100	R.MTL.OXD	1KΩ	1/2W	440,5640		酸化金属被膜抵抗	
	R123	HL005820	R.MTL.OXD	820Ω	1/2W	440,5640		酸化金属被膜抵抗	
	R124	V8072000	R.MTL.OXD	4.7KΩ	1W	440,5640	JRTKABGL	酸化金属被膜抵抗	
	R124	V8072100	R.MTL.OXD	5.6KΩ	1W	440,5640	UC	酸化金属被膜抵抗	
	R125	V8072000	R.MTL.OXD	4.7KΩ	1W	440,5640		酸化金属被膜抵抗	
	R126	HV755100	R.CAR.FP	100Ω	1/4W	440,5640		不燃化カーボン抵抗	01
	R127	HL006270	R.MTL.OXD	2.7KΩ	1/2W	440,5640		酸化金属被膜抵抗	
*	R128	HL005330	R.MTL.OXD	330Ω	1/2W	440,5640		酸化金属被膜抵抗	
	R129	HL006100	R.MTL.OXD	1KΩ	1/2W	440,5640		酸化金属被膜抵抗	
	R130	HL005820	R.MTL.OXD	820Ω	1/2W	440,5640		酸化金属被膜抵抗	
	R131	V8072000	R.MTL.OXD	4.7KΩ	1W	440,5640	JRTKABGL	酸化金属被膜抵抗	
	R131	V8072100	R.MTL.OXD	5.6KΩ	1W	440,5640	UC	酸化金属被膜抵抗	
	R132	V8072000	R.MTL.OXD	4.7KΩ	1W	440,5640		酸化金属被膜抵抗	
	R133	HV755100	R.CAR.FP	100Ω	1/4W	440,5640		不燃化カーボン抵抗	01
	R134	HL006270	R.MTL.OXD	2.7KΩ	1/2W	440,5640		酸化金属被膜抵抗	
*	R135	HL005330	R.MTL.OXD	330Ω	1/2W	440,5640		酸化金属被膜抵抗	
	R136	HL006100	R.MTL.OXD	1KΩ	1/2W	440,5640		酸化金属被膜抵抗	
	R137	HL005820	R.MTL.OXD	820Ω	1/2W	440,5640		酸化金属被膜抵抗	
⚠	R140	HV754100	R.CAR.FP	10Ω	1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R142	VP939700	R.MTL.FLM	4.7Ω	1W	440,5640		金属被膜抵抗	01
⚠	R143	VP940600	R.MTL.OXD	220Ω	1W	440,5640		酸化金属被膜抵抗	01
⚠	R146	VP939700	R.MTL.FLM	4.7Ω	1W	440,5640		金属被膜抵抗	01
⚠	R147	VP939700	R.MTL.FLM	4.7Ω	1W	440,5640		金属被膜抵抗	01
	R148	VP940600	R.MTL.OXD	220Ω	1W	440,5640		酸化金属被膜抵抗	01
⚠	R150	VP939700	R.MTL.FLM	4.7Ω	1W	440,5640		金属被膜抵抗	01
⚠	R152	V8071100	R.MTL.FLM	220Ω	1W	440,5640		金属被膜抵抗	
⚠	R153	HV754100	R.CAR.FP	10Ω	1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R154	HV754100	R.CAR.FP	10Ω	1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R155	HV754100	R.CAR.FP	10Ω	1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R156	V8071100	R.MTL.FLM	220Ω	1W	440,5640		金属被膜抵抗	
⚠	R157	HV754100	R.CAR.FP	10Ω	1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R158	VP939800	R.MTL.OXD	10Ω	1W	440,5640		酸化金属被膜抵抗	01
⚠	R159	VP940600	R.MTL.OXD	220Ω	1W	440,5640		酸化金属被膜抵抗	01
⚠	R160	VP939800	R.MTL.OXD	10Ω	1W	440,5640		酸化金属被膜抵抗	01
⚠	R162	HV756150	R.CAR.FP	1.5KΩ	1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R164	V3873200	R.WW	0.22Ω	3W	440,5640		セメント抵抗	02
⚠	R168	V3873200	R.WW	0.22Ω	3W	440,5640		セメント抵抗	02
* ⚠	R175	WB279900	R.WW	RGC55C	0.22+0.22	440,5640		セメント抵抗	
* ⚠	R177	WB279900	R.WW	RGC55C	0.22+0.22	440,5640		セメント抵抗	

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. MAIN

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
⚠	R181	V3873200	R.WW	0.22Ω 3W	440,5640		セメント抵抗	02
⚠	R188	VP939800	R.MTL.OXD	10Ω 1W	440,5640		酸化金属被膜抵抗	01
⚠	R192	VP939800	R.MTL.OXD	10Ω 1W	440,5640		酸化金属被膜抵抗	01
⚠	R196	V8070300	R.MTL.FLM	10Ω 1W	440,5640		金属被膜抵抗	
⚠	R200	V8070300	R.MTL.FLM	10Ω 1W	440,5640		金属被膜抵抗	
⚠	R204	VP939800	R.MTL.OXD	10Ω 1W	440,5640		酸化金属被膜抵抗	01
⚠	R208	VP939700	R.MTL.FLM	4.7Ω 1W	440,5640		金属被膜抵抗	01
⚠	R220	VP939700	R.MTL.FLM	4.7Ω 1W	440,5640		金属被膜抵抗	01
	R221	VP939700	R.MTL.FLM	4.7Ω 1W	440,5640		金属被膜抵抗	01
	R222	HV754100	R.CAR.FP	10Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R223	HV754100	R.CAR.FP	10Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R228	HV753100	R.CAR.FP	1Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R301	VP940800	R.MTL.OXD	470Ω 1W	440,5640		酸化金属被膜抵抗	01
	R302	VP940800	R.MTL.OXD	470Ω 1W	440,5640		酸化金属被膜抵抗	01
⚠	R306	HV755100	R.CAR.FP	100Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R307	HV756100	R.CAR.FP	1KΩ 1/4W	440,5640		不燃化カーボン抵抗	01
	R314	VP940800	R.MTL.OXD	470Ω 1W	440,5640		酸化金属被膜抵抗	01
	R315	VP940800	R.MTL.OXD	470Ω 1W	440,5640		酸化金属被膜抵抗	01
	R328	HV753100	R.CAR.FP	1Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R329	HV753100	R.CAR.FP	1Ω 1/4W	440,5640		不燃化カーボン抵抗	01
	R333	HV753470	R.CAR.FP	4.7Ω 1/4W	440,5640	RTKABGL	不燃化カーボン抵抗	01
	R334	HV753470	R.CAR.FP	4.7Ω 1/4W	440,5640	RTKABGL	不燃化カーボン抵抗	01
	R336	HV753470	R.CAR.FP	4.7Ω 1/4W	440,5640	RTKABGL	不燃化カーボン抵抗	01
	R337	HV753470	R.CAR.FP	4.7Ω 1/4W	440,5640	RTKABGL	不燃化カーボン抵抗	01
	R338	HV753470	R.CAR.FP	4.7Ω 1/4W	440,5640	RTKABGL	不燃化カーボン抵抗	01
	R401	HL006270	R.MTL.OXD	2.7KΩ 1/2W	440,5640		酸化金属被膜抵抗	
*	R402	HL005270	R.MTL.OXD	270Ω 1/2W	440,5640		酸化金属被膜抵抗	
	R403	HL006100	R.MTL.OXD	1KΩ 1/2W	440,5640		酸化金属被膜抵抗	
	R404	HL006100	R.MTL.OXD	1KΩ 1/2W	440,5640		酸化金属被膜抵抗	
	R405	V8072000	R.MTL.OXD	4.7KΩ 1W	440,5640	RTKABGL	酸化金属被膜抵抗	
	R405	V8072100	R.MTL.OXD	5.6KΩ 1W	440,5640	UC	酸化金属被膜抵抗	
	R406	V8072000	R.MTL.OXD	4.7KΩ 1W	440,5640		酸化金属被膜抵抗	
	R407	HV755100	R.CAR.FP	100Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R408	HV753100	R.CAR.FP	1Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R409	HV753100	R.CAR.FP	1Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R410	V8071100	R.MTL.FLM	220Ω 1W	440,5640		金属被膜抵抗	
⚠	R411	HV754100	R.CAR.FP	10Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R412	HV754100	R.CAR.FP	10Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠	R413	V8070000	R.MTL.FLM	1Ω 1W	440,5640		金属被膜抵抗	
⚠	R414	V8070000	R.MTL.FLM	1Ω 1W	440,5640		金属被膜抵抗	
* ⚠	R416	WB279900	R.WW	RGC55C 0.22+0.22	440,5640		セメント抵抗	
⚠	R421	V8070300	R.MTL.FLM	10Ω 1W	440,5640		金属被膜抵抗	
	R423	V8070000	R.MTL.FLM	1Ω 1W	440,5640		金属被膜抵抗	
	R424	V8070000	R.MTL.FLM	1Ω 1W	440,5640		金属被膜抵抗	
*	RY301	WA544800	RELAY	DC G5PA-28	440,5640		リレー ２４Ｖ	
*	RY302	WA544800	RELAY	DC G5PA-28	440,5640		リレー ２４Ｖ	
*	RY303	WA544800	RELAY	DC G5PA-28	440,5640		リレー ２４Ｖ	
*	RY304	WA544800	RELAY	DC G5PA-28	440,5640		リレー ２４Ｖ	
	ST101	V4040500	SCR.TERM	M3	440,5640		スクリュー／ターミナル	01
	ST301	V4040500	SCR.TERM	M3	440,5640		スクリュー／ターミナル	01
⚠	SW301	V4104200	SW.SLIDE	SL13B-022-AMCS	440,5640	UCRTKABGL	スライドＳＷ	03
*	TE301	V5912200	TERM.SP	8P LTS0810	440,5640	KBGL	スピーカターミナル ８Ｐ	
	TE301	V6771200	TERM.SP	8P LTS0810	440,5640	JUCRTA	スピーカターミナル ８Ｐ	06

＊New Parts ＊新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. MAIN & P.C.B. POWER

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	TE302	V5912200	TERM.SP	8P LTS0810	440,5640	KBGL	スピーカーターミナル 8P	
	TE302	V6771200	TERM.SP	8P LTS0810	440,5640	JUCRTA	スピーカーターミナル 8P	06
		EP600140	SCR.BND.HD	3x10 MFZN2BL	440,5640		バインドBタイトネジ	01
*		WA702600	P.C.B.	POWER	540,5650	J	ＰＣＢ パワー	
*		WA702700	P.C.B.	POWER	540,5650	UC	ＰＣＢ パワー	
*		WA702800	P.C.B.	POWER	540,5650	RK	ＰＣＢ パワー	
*		WB225100	P.C.B.	POWER	540,5650	T	ＰＣＢ パワー	
*		WA702900	P.C.B.	POWER	540,5650	A	ＰＣＢ パワー	
*		WA703000	P.C.B.	POWER	540,5650	B	ＰＣＢ パワー	
*		WA703100	P.C.B.	POWER	540,5650	GL	ＰＣＢ パワー	
	CB601	VM973500	CN.BS.PIN	17P	540,5650		ＦＦＣコネクター	01
	CB602	V7826500	CN	15P TE TUC SERIES	540,5650	JUCRKABGL	コネクタープラグ	01
*	CB602	VQ963600	CN	15P TE	540,5650	T	ウエハー	
	CB603	V7827400	SOCKET	7P TE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB603	VQ961000	CN	7P SE	540,5650	T	ハウジング	
	CB604	V7828200	SOCKET	15P TE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB604	VQ961800	CN	15P SE	540,5650	T	ハウジング	
	CB701	V7827100	SOCKET	4P TE TUC SERIES	540,5650	JUCRKABGL	コネクターソケット	
*	CB701	VQ960700	CN	4P SE	540,5650	T	ハウジング	
	CB702	VP206500	HOLDER.FUS	EYF-52BCT	540,5650	UCGL	ヒューズホルダー	01
	CB703	VP206500	HOLDER.FUS	EYF-52BCT	540,5650	UCGL	ヒューズホルダー	01
	CB704	VP206500	HOLDER.FUS	EYF-52BCT	540,5650		ヒューズホルダー	01
	CB705	VP206500	HOLDER.FUS	EYF-52BCT	540,5650		ヒューズホルダー	01
	CB706	VG879900	CN.BS.PIN	2P	540,5650		ベースピン	01
	CB707	VG879900	CN.BS.PIN	2P	540,5650		ベースピン	01
	CB941	VP206500	HOLDER.FUS	EYF-52BCT	540,5650	RTK	ヒューズホルダー	01
	CB942	VP206500	HOLDER.FUS	EYF-52BCT	540,5650	RTK	ヒューズホルダー	01
*	CB945	V9377800	CN.BS.PIN	3P SE VHSERIES	540,5650	RTK	ベース付ポスト	
*	CB946	V9377900	CN.BS.PIN	4P SE VHSERIES	540,5650	RTK	ベース付ポスト	
	C601	V8584600	C.PP	220pF 630V	540,5650		ＰＰコン	
	C602	UU137100	C.EL	10uF 16V	540,5650		ケミコン	01
	C603	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
	C604	UU137100	C.EL	10uF 16V	540,5650		ケミコン	01
	C605	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
	C606	UU137100	C.EL	10uF 16V	540,5650		ケミコン	01
	C607	UR877100	C.EL	10uF 63V	540,5650		ケミコン	01
	C608	UU138100	C.EL	100uF 16V	540,5650		ケミコン	01
	C609	V2290000	C.EL	22uF 63V	540,5650		ケミコンＲＡ－２	01
	C610	UT652100	C.PP	100pF 100V	540,5650		ＰＰコン	01
	C611	UT652220	C.PP	220pF 100V	540,5650		ＰＰコン	01
	C612	UT652100	C.PP	100pF 100V	540,5650		ＰＰコン	01
	C613	UT652220	C.PP	220pF 100V	540,5650		ＰＰコン	01
	C614	UA652100	C.MYLAR	100pF 50V	540,5650		マイラーコン	01
	C615	UA652220	C.MYLAR	220pF 50V	540,5650		マイラーコン	01
	C616	UA652100	C.MYLAR	100pF 50V	540,5650		マイラーコン	01
	C617	UA652220	C.MYLAR	220pF 50V	540,5650		マイラーコン	01
	C618	UT652100	C.PP	100pF 100V	540,5650		ＰＰコン	01
	C619	UT652220	C.PP	220pF 100V	540,5650		ＰＰコン	01
	C620	UA652100	C.MYLAR	100pF 50V	540,5650		マイラーコン	01
	C621	UA652220	C.MYLAR	220pF 50V	540,5650		マイラーコン	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. POWER

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	C622	V2290000	C.EL	22uF 63V	540,5650		ケミコンＲＡ－２	01
*	C623	UT653330	C.PP	3300pF 100V	540,5650		ＰＰコン	03
*	C624	UT653330	C.PP	3300pF 100V	540,5650		ＰＰコン	03
	C625	UA653330	C.MYLAR	3300pF 50V	540,5650		マイラーコン	01
	C626	UA653330	C.MYLAR	3300pF 50V	540,5650		マイラーコン	01
*	C627	UT653330	C.PP	3300pF 100V	540,5650		ＰＰコン	03
	C628	UA653330	C.MYLAR	3300pF 50V	540,5650		マイラーコン	01
	C629	VG291300	C.EL	100uF 50V	540,5650		ケミコン	01
	C630	VG291300	C.EL	100uF 50V	540,5650		ケミコン	01
	C631	UR847470	C.EL	47uF 25V	540,5650		ケミコン	01
	C632	UR847470	C.EL	47uF 25V	540,5650		ケミコン	01
	C633	VG291200	C.EL	47uF 50V	540,5650		ケミコン	01
	C634	UR847470	C.EL	47uF 25V	540,5650		ケミコン	01
	C635	FU451150	C.MICA	15pF 500V	540,5650		マイカコン	01
	C636	FU451150	C.MICA	15pF 500V	540,5650		マイカコン	01
*	C637	WA970200	C.CE	15pF 500V	540,5650		セラコン（ＣＨ）	
*	C638	WA970200	C.CE	15pF 500V	540,5650		セラコン（ＣＨ）	
	C639	FU451150	C.MICA	15pF 500V	540,5650		マイカコン	01
*	C640	WA970200	C.CE	15pF 500V	540,5650		セラコン（ＣＨ）	
	C701	VG289200	C.EL	470uF 25V	540,5650		ケミコン	01
	C702	UR847100	C.EL	10uF 25V	540,5650	RTK	ケミコン	01
	C703	UR897100	C.EL	10uF 100V	540,5650	RTK	ケミコン	01
	C704	UR867100	C.EL	10uF 50V	540,5650	RTK	ケミコン	01
	C705	VL884600	C.PP	0.01uF 100V	540,5650	JUCABGL	ＰＰコン	
	C706	UA654100	C.MYLAR	0.01uF 50V	540,5650	RTK	マイラーコン	01
	C707	UA654100	C.MYLAR	0.01uF 50V	540,5650	RTK	マイラーコン	01
⚠	C708	V6185300	C.CE.SAFTY	0.01uF 275V	540,5650		規格認定コン	
	C710	UA654100	C.MYLAR	0.01uF 50V	540,5650		マイラーコン	01
	D601	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D602	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D603	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650		ツェナーダイオード	01
	D604	VG437500	DIODE.ZENR	MTZJ5.1C 5.1V	540,5650	UCRTKABGL	ツェナーダイオード	01
	D605	VG439200	DIODE.ZENR	MTZJ9.1B 9.1V	540,5650	J	ツェナーダイオード	01
	D605	VG440300	DIODE.ZENR	MTZJ12C 12V	540,5650	UCRTKABGL	ツェナーダイオード	01
	D606	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D607	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D701	VD631600	DIODE	1SS133,176	540,5650		ダイオード	01
	D702	VD631600	DIODE	1SS133,176	540,5650	RTK	ダイオード	01
	D703	VG440400	DIODE.ZENR	MTZJ13A 13V	540,5650	RTK	ツェナーダイオード	01
	D704	VV307700	DIODE	1N4002S	540,5650		ダイオード	01
	D705	VV307700	DIODE	1N4002S	540,5650		ダイオード	01
	D706	VV307700	DIODE	1N4002S	540,5650	RTK	ダイオード	01
	D707	VV307700	DIODE	1N4002S	540,5650		ダイオード	01
	D708	VV307700	DIODE	1N4002S	540,5650		ダイオード	01
⚠	F701	VS823300	FUSE	T8A 125V	540,5650	UC	ヒユーズ	02
⚠	F701	VT942900	FUSE	T2.5A 250V	540,5650	GL	ヒユーズ	01
⚠	F702	KB000790	FUSE	T4.0A 250V	540,5650	ABGL	ヒューズ	01
⚠	F702	VS823300	FUSE	T8A 125V	540,5650	JUCRK	ヒユーズ	02
⚠	F702	WB507100	FUSE	8A 125V	540,5650	T	ヒユーズ	
	F941	KB000790	FUSE	T4.0A 250V	540,5650	RTK	ヒューズ	01
	PN701	V9637500	PIN	L=70 ♯18	540,5650		スタイルピン	
	Q601	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q602	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

P.C.B. POWER

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	Q603	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q604	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q605	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q606	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q607	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q607	VP883100	TR	2SC1890A D,E	540,5650	UCRTKABGL	トランジスタ	01
⚠	Q608	VR510800	TR	2SD2396 J,K	540,5650		トランジスタ	02
	Q609	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q610	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q611	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q612	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q613	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q614	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q615	VP883100	TR	2SC1890A D,E	540,5650		トランジスタ	01
	Q616	V3966800	TR	2SB949 O,Y	540,5650		トランジスタ	02
	Q617	V3966800	TR	2SB949 O,Y	540,5650		トランジスタ	02
	Q618	V3966800	TR	2SB949 O,Y	540,5650		トランジスタ	02
	Q619	V3966800	TR	2SB949 O,Y	540,5650		トランジスタ	02
	Q620	V3966800	TR	2SB949 O,Y	540,5650		トランジスタ	02
	Q621	V3966800	TR	2SB949 O,Y	540,5650		トランジスタ	02
	Q701	iC1815I0	TR	2SC1815 Y	540,5650		トランジスタ	01
	Q702	VR510800	TR	2SD2396 J,K	540,5650	RTK	トランジスタ	02
	Q703	iE102620	FET	2SK246 Y	540,5650	RTK	ＦＥＴ	01
	Q704	VR510800	TR	2SD2396 J,K	540,5650	RTK	トランジスタ	02
⚠	R636	HV754100	R.CAR.FP	10Ω 1/4W	540,5650		不燃化カーボン抵抗	01
⚠	R644	HV756470	R.CAR.FP	4.7KΩ 1/4W	540,5650		不燃化カーボン抵抗	01
	R663	VP940400	R.MTL.OXD	100Ω 1W	540,5650		酸化金属被膜抵抗	01
	R664	VP940400	R.MTL.OXD	100Ω 1W	540,5650		酸化金属被膜抵抗	01
	R665	HV755100	R.CAR.FP	100Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R666	HV755100	R.CAR.FP	100Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R667	VP940400	R.MTL.OXD	100Ω 1W	540,5650		酸化金属被膜抵抗	01
	R668	HV755100	R.CAR.FP	100Ω 1/4W	540,5650		不燃化カーボン抵抗	01
	R705	V6730000	R.CAR.	2.2MΩ 1/2W	540,5650	UC	放電抵抗	01
⚠	RY701	V2712300	RELAY	DC SDT-S-112LMR	540,5650		リレー １２Ｖ	05
	ST601	V4040500	SCR.TERM	M3	540,5650		スクリュー／ターミナル	01
	ST701	V4040500	SCR.TERM	M3	540,5650		スクリュー／ターミナル	01
	ST702	V4040500	SCR.TERM	M3	540,5650		スクリュー／ターミナル	01
* ⚠	SW941	V7182300	VOLT.SELCT	R8140213	540,5650	RK	電圧切替器	
⚠	T701	XW605A00	TRANS.PWR		540,5650	J	電源トランス	04
* ⚠	T701	XW606A00	TRANS.PWR		540,5650	UC	電源トランス	
* ⚠	T701	XW608A00	TRANS.PWR		540,5650	ABGL	電源トランス	
⚠	T701	XW974A00	TRANS.PWR		540,5650	RTK	電源トランス	05
⚠	TE701	V5867400	OUTLET.AC	2P AC-182-GB-11V	540,5650	RTK	ＡＣアウトレット ２Ｐ	
⚠	TE701	VT915000	OUTLET.AC	1P	540,5650	A	ＡＣアウトレット	06
⚠	TE701	VU543100	OUTLET.AC	2P	540,5650	JUC	ＡＣアウトレット	03
⚠	TE701	VU543300	OUTLET.AC	1P	540,5650	B	ＡＣアウトレット	05
⚠	TE701	VU543400	OUTLET.AC	2P	540,5650	GL	ＡＣアウトレット	05
		EP600140	SCR.BND.HD	3x10 MFZN2BL	540,5650	RTK	バインドＢタイトネジ	01

＊New Parts ＊新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. POWER

	Schm Ref.	PART NO.	Description	Remarks	Markets	部 品 名	Rank
*		WA703200	P.C.B. POWER	440,5640	J	ＰＣＢ　パワー	
*		WA703300	P.C.B. POWER	440,5640	UC	ＰＣＢ　パワー	
*		WA703400	P.C.B. POWER	440,5640	RK	ＰＣＢ　パワー	
*		WB225300	P.C.B. POWER	440,5640	T	ＰＣＢ　パワー	
*		WA703500	P.C.B. POWER	440,5640	A	ＰＣＢ　パワー	
*		WA703600	P.C.B. POWER	440,5640	B	ＰＣＢ　パワー	
*		WA703700	P.C.B. POWER	440,5640	GL	ＰＣＢ　パワー	
	CB601	VM973500	CN.BS.PIN 17P	440,5640		ＦＦＣコネクター	01
	CB602	V7826500	CN 15P TE TUC SERIES	440,5640	JUCRKABGL	コネクタープラグ	01
*	CB602	VQ963600	CN 15P TE	440,5640	T	ウエハー	
	CB603	V7827400	SOCKET 7P TE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB603	VQ961000	CN 7P SE	440,5640	T	ハウジング	
	CB604	V7828200	SOCKET 15P TE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB604	VQ961800	CN 15P SE	440,5640	T	ハウジング	
	CB701	V7827100	SOCKET 4P TE TUC SERIES	440,5640	JUCRKABGL	コネクターソケット	
*	CB701	VQ960700	CN 4P SE	440,5640	T	ハウジング	
	CB702	VP206500	HOLDER.FUS EYF-52BCT	440,5640	UCGL	ヒューズホルダー	01
	CB703	VP206500	HOLDER.FUS EYF-52BCT	440,5640	UCGL	ヒューズホルダー	01
	CB704	VP206500	HOLDER.FUS EYF-52BCT	440,5640		ヒューズホルダー	01
	CB705	VP206500	HOLDER.FUS EYF-52BCT	440,5640		ヒューズホルダー	01
	CB706	VG879900	CN.BS.PIN 2P	440,5640		ベースピン	01
	CB707	VG879900	CN.BS.PIN 2P	440,5640		ベースピン	01
	CB941	VP206500	HOLDER.FUS EYF-52BCT	440,5640	RTK	ヒューズホルダー	01
	CB942	VP206500	HOLDER.FUS EYF-52BCT	440,5640	RTK	ヒューズホルダー	01
*	CB945	V9377800	CN.BS.PIN 3P SE VHSERIES	440,5640	RTK	ベース付ポスト	
*	CB946	V9377900	CN.BS.PIN 4P SE VHSERIES	440,5640	RTK	ベース付ポスト	
	C601	UA652220	C.MYLAR 220pF 50V	440,5640	UCRTKA	マイラーコン	01
	C601	V8584600	C.PP 220pF 630V	440,5640	JBGL	ＰＰコン	
	C602	UU137100	C.EL 10uF 16V	440,5640		ケミコン	01
	C603	UR837100	C.EL 10uF 16V	440,5640		ケミコン	01
	C604	UU137100	C.EL 10uF 16V	440,5640		ケミコン	01
	C605	UR837100	C.EL 10uF 16V	440,5640		ケミコン	01
	C606	UU137100	C.EL 10uF 16V	440,5640		ケミコン	01
	C607	UR837100	C.EL 10uF 16V	440,5640		ケミコン	01
	C608	UU138100	C.EL 100uF 16V	440,5640		ケミコン	01
	C609	UR877220	C.EL 22uF 63V	440,5640		ケミコン	01
	C610	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C611	UA652220	C.MYLAR 220pF 50V	440,5640		マイラーコン	01
	C612	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C613	UA652220	C.MYLAR 220pF 50V	440,5640		マイラーコン	01
	C614	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C615	UA652220	C.MYLAR 220pF 50V	440,5640		マイラーコン	01
	C616	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C617	UA652220	C.MYLAR 220pF 50V	440,5640		マイラーコン	01
	C618	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C619	UA652220	C.MYLAR 220pF 50V	440,5640		マイラーコン	01
	C620	UA652100	C.MYLAR 100pF 50V	440,5640		マイラーコン	01
	C621	UA652220	C.MYLAR 220pF 50V	440,5640		マイラーコン	01
	C622	UR877220	C.EL 22uF 63V	440,5640		ケミコン	01
	C623	UA653330	C.MYLAR 3300pF 50V	440,5640	UCRTKA	マイラーコン	01
*	C623	UT653330	C.PP 3300pF 100V	440,5640	JBGL	ＰＰコン	03
	C624	UA653330	C.MYLAR 3300pF 50V	440,5640	UCRTKA	マイラーコン	01
*	C624	UT653330	C.PP 3300pF 100V	440,5640	JBGL	ＰＰコン	03

※ New Parts　＊新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. POWER

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
	C625	UA653330	C.MYLAR	3300pF	50V	440,5640		マイラーコン	01
	C626	UA653330	C.MYLAR	3300pF	50V	440,5640		マイラーコン	01
	C627	UA653330	C.MYLAR	3300pF	50V	440,5640	UCRTKA	マイラーコン	01
*	C627	UT653330	C.PP	3300pF	100V	440,5640	JBGL	ＰＰコン	03
	C628	UA653330	C.MYLAR	3300pF	50V	440,5640		マイラーコン	01
	C629	VG291300	C.EL	100uF	50V	440,5640		ケミコン	01
	C630	VG291300	C.EL	100uF	50V	440,5640		ケミコン	01
	C631	UR837470	C.EL	47uF	16V	440,5640		ケミコン	01
	C632	UR837470	C.EL	47uF	16V	440,5640		ケミコン	01
	C633	VG291200	C.EL	47uF	50V	440,5640		ケミコン	01
	C634	UR837470	C.EL	47uF	16V	440,5640		ケミコン	01
	C635	FU451150	C.MICA	15pF	500V	440,5640		マイカコン	01
	C636	FU451150	C.MICA	15pF	500V	440,5640		マイカコン	01
*	C637	WA970200	C.CE	15pF	500V	440,5640		セラコン（ＣＨ）	
*	C638	WA970200	C.CE	15pF	500V	440,5640		セラコン（ＣＨ）	
	C639	FU451150	C.MICA	15pF	500V	440,5640		マイカコン	01
*	C640	WA970200	C.CE	15pF	500V	440,5640		セラコン（ＣＨ）	
*	C701	WB303800	C.EL	470uF	25V	440,5640		ケミコン	
	C702	UR847100	C.EL	10uF	25V	440,5640	RTK	ケミコン	01
	C703	UR897100	C.EL	10uF	100V	440,5640	RTK	ケミコン	01
	C704	UR867100	C.EL	10uF	50V	440,5640	RTK	ケミコン	01
	C705	UA654100	C.MYLAR	0.01uF	50V	440,5640	UCA	マイラーコン	01
	C705	VL884600	C.PP	0.01uF	100V	440,5640	JBGL	ＰＰコン	
	C706	UA654100	C.MYLAR	0.01uF	50V	440,5640	RTK	マイラーコン	01
	C707	UA654100	C.MYLAR	0.01uF	50V	440,5640	RTK	マイラーコン	01
	C707	UA654100	C.MYLAR	0.01uF	50V	440,5640		マイラーコン	01
⚠	C708	V6185300	C.CE.SAFTY	0.01uF	275V	440,5640		規格認定コン	
	C710	UA654100	C.MYLAR	0.01uF	50V	440,5640		マイラーコン	01
	D601	VG440300	DIODE.ZENR	MTZJ12C	12V	440,5640		ツェナーダイオード	01
	D602	VD631600	DIODE	1SS133,176		440,5640		ダイオード	01
	D603	VG440300	DIODE.ZENR	MTZJ12C	12V	440,5640		ツェナーダイオード	01
	D604	VG437500	DIODE.ZENR	MTZJ5.1C	5.1V	440,5640	UCRTKABGL	ツェナーダイオード	01
	D605	VG439200	DIODE.ZENR	MTZJ9.1B	9.1V	440,5640	J	ツェナーダイオード	01
	D605	VG440300	DIODE.ZENR	MTZJ12C	12V	440,5640	UCRTKABGL	ツェナーダイオード	01
	D606	VD631600	DIODE	1SS133,176		440,5640		ダイオード	01
	D607	VD631600	DIODE	1SS133,176		440,5640		ダイオード	01
	D701	VD631600	DIODE	1SS133,176		440,5640		ダイオード	01
	D702	VD631600	DIODE	1SS133,176		440,5640	RTK	ダイオード	01
	D703	VG440400	DIODE.ZENR	MTZJ13A	13V	440,5640	RTK	ツェナーダイオード	01
	D704	VV307700	DIODE	1N4002S		440,5640		ダイオード	01
	D705	VV307700	DIODE	1N4002S		440,5640		ダイオード	01
	D706	VV307700	DIODE	1N4002S		440,5640	RTK	ダイオード	01
	D707	VV307700	DIODE	1N4002S		440,5640		ダイオード	01
	D708	VV307700	DIODE	1N4002S		440,5640		ダイオード	01
⚠	F701	VS823300	FUSE	T8A	125V	440,5640	UC	ヒユーズ	02
⚠	F701	VT942900	FUSE	T2.5A	250V	440,5640	GL	ヒユーズ	01
⚠	F702	KB000790	FUSE	T4.0A	250V	440,5640	ABGL	ヒューズ	01
⚠	F702	VS823300	FUSE	T8A	125V	440,5640	JUCRK	ヒユーズ	02
⚠	F702	WB507100	FUSE	8A	125V	440,5640	T	ヒユーズ	
	F941	KB000790	FUSE	T4.0A	250V	440,5640	RTK	ヒューズ	01
	PN701	V9637500	PIN	L=70 ♯18		440,5640		スタイルピン	
	Q601	VP883100	TR	2SC1890A D,E		440,5640		トランジスタ	01
	Q602	VP883100	TR	2SC1890A D,E		440,5640		トランジスタ	01

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

P.C.B. POWER

Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
Q603	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q604	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q605	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q606	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q607	VP883100	TR	2SC1890A D,E	440,5640	UCRTKABGL	トランジスタ	01
⚠ Q608	VR510800	TR	2SD2396 J,K	440,5640		トランジスタ	02
Q609	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q610	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q611	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q612	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q613	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q614	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q615	VP883100	TR	2SC1890A D,E	440,5640		トランジスタ	01
Q616	V3966800	TR	2SB949 O,Y	440,5640		トランジスタ	02
Q617	V3966800	TR	2SB949 O,Y	440,5640		トランジスタ	02
Q618	V3966800	TR	2SB949 O,Y	440,5640		トランジスタ	02
Q619	V3966800	TR	2SB949 O,Y	440,5640		トランジスタ	02
Q620	V3966800	TR	2SB949 O,Y	440,5640		トランジスタ	02
Q621	V3966800	TR	2SB949 O,Y	440,5640		トランジスタ	02
Q701	iC18151O	TR	2SC1815 Y	440,5640		トランジスタ	01
Q702	VR510800	TR	2SD2396 J,K	440,5640	RTK	トランジスタ	02
Q703	iE102620	FET	2SK246 Y	440,5640	RTK	ＦＥＴ	01
Q704	VR510800	TR	2SD2396 J,K	440,5640	RTK	トランジスタ	02
⚠ R636	HV754100	R.CAR.FP	10Ω 1/4W	440,5640		不燃化カーボン抵抗	01
⚠ R644	HV756470	R.CAR.FP	4.7KΩ 1/4W	440,5640		不燃化カーボン抵抗	01
R663	VP940400	R.MTL.OXD	100Ω 1W	440,5640		酸化金属被膜抵抗	01
R664	VP940400	R.MTL.OXD	100Ω 1W	440,5640		酸化金属被膜抵抗	01
R665	HV755100	R.CAR.FP	100Ω 1/4W	440,5640		不燃化カーボン抵抗	01
R666	HV755100	R.CAR.FP	100Ω 1/4W	440,5640		不燃化カーボン抵抗	01
R667	VP940400	R.MTL.OXD	100Ω 1W	440,5640		酸化金属被膜抵抗	01
R668	HV755100	R.CAR.FP	100Ω 1/4W	440,5640		不燃化カーボン抵抗	01
R705	V6730000	R.CAR.	2.2MΩ 1/2W	440,5640	UC	放電抵抗	01
⚠ RY701	V2712300	RELAY	DC SDT-S-112LMR	440,5640		リレー １２Ｖ	05
ST601	V4040500	SCR.TERM	M3	440,5640		スクリュー／ターミナル	01
ST701	V4040500	SCR.TERM	M3	440,5640		スクリュー／ターミナル	01
ST702	V4040500	SCR.TERM	M3	440,5640		スクリュー／ターミナル	01
* ⚠ SW941	V7182300	VOLT.SELCT	R8140213	440,5640	RK	電圧切替器	
⚠ T701	XW605A00	TRANS.PWR		440,5640	J	電源トランス	04
* ⚠ T701	XW606A00	TRANS.PWR		440,5640	UC	電源トランス	
* ⚠ T701	XW608A00	TRANS.PWR		440,5640	ABGL	電源トランス	
⚠ T701	XW974A00	TRANS.PWR		440,5640	RTK	電源トランス	05
⚠ TE701	V5867400	OUTLET.AC	2P AC-182-GB-11V	440,5640	RTK	ＡＣアウトレット ２Ｐ	
⚠ TE701	VT915000	OUTLET.AC	1P	440,5640	A	ＡＣアウトレット	06
⚠ TE701	VU543100	OUTLET.AC	2P	440,5640	JUC	ＡＣアウトレット	03
⚠ TE701	VU543300	OUTLET.AC	1P	440,5640	B	ＡＣアウトレット	05
⚠ TE701	VU543400	OUTLET.AC	2P	440,5640	GL	ＡＣアウトレット	05
	EP600140	SCR.BND.HD	3x10 MFZN2BL	440,5640	RTK	バインドＢタイトネジ	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

Chip Resistors

	Schm Ref.	PART NO.	Description			Remarks	Markets	部 品 名	Rank
		RD350000	R.CHP	0Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD353220	R.CHP	2.2Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD353470	R.CHP	4.7Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD354470	R.CHP	47Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
*		RD354560	R.CHP	56Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD354750	R.CHP	75Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD354820	R.CHP	82Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD355100	R.CHP	100Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD355220	R.CHP	220Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD355330	R.CHP	330Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD355470	R.CHP	470Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD355680	R.CHP	680Ω	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356100	R.CHP	1KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356150	R.CHP	1.5KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356220	R.CHP	2.2KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356330	R.CHP	3.3KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356360	R.CHP	3.6KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356430	R.CHP	4.3KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356470	R.CHP	4.7KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356510	R.CHP	5.1KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356680	R.CHP	6.8KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD356820	R.CHP	8.2KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD357100	R.CHP	10KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD357150	R.CHP	15KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD357180	R.CHP	18KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD357220	R.CHP	22KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD357270	R.CHP	27KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD357330	R.CHP	33KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD357470	R.CHP	47KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD358100	R.CHP	100KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD358150	R.CHP	150KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD358220	R.CHP	220KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD358470	R.CHP	470KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD358680	R.CHP	680KΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
		RD359100	R.CHP	1MΩ	1/16W	5%,1.6x0.8		チップ抵抗	01
*		RF355620	R.CHP	620Ω	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF356150	R.CHP	1.5KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF356180	R.CHP	1.8KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF356200	R.CHP	2KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF356330	R.CHP	3.3KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
*		RF356430	R.CHP	4.3KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF356470	R.CHP	4.7KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF356510	R.CHP	5.1KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
*		RF356680	R.CHP	6.8KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
*		RF356820	R.CHP	8.2KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF357100	R.CHP	10KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
*		RF357390	R.CHP	39KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01
		RF357470	R.CHP	47KΩ	1/16W	0.5%,1.6x0.8		チップ抵抗	01

※ New Parts ＊ 新規部品（マーク#の部品は、基板に含まれません）

Parts List for Carbon Resistors

Value	**1/4W** Type Part No.	**1/6W** Type Part No.	Value	**1/4W** Type Part No.	**1/6W** Type Part No.
1.0 Ω	HJ35 3100	HF85 3100	10 kΩ	HF45 7100	HF45 7100
1.8 Ω	HJ35 3180	※	11 kΩ	HF45 7110	HF45 7110
2.2 Ω	HJ35 3220	HF85 3220	12 kΩ	HJ35 7120	HF85 7120
3.3 Ω	HJ35 3330	HF85 3330	13 kΩ	HF45 7130	HF45 7130
4.7 Ω	HJ35 3470	HF85 3470	15 kΩ	HF45 7150	HF45 7150
5.6 Ω	HJ35 3560	HF85 3560	18 kΩ	HF45 7180	HF45 7180
10 Ω	HF45 4100	HF45 4100	22 kΩ	HF45 7220	HF45 7220
15 Ω	HJ35 4150	HF85 4150	24 kΩ	HF45 7240	HF45 7240
22 Ω	HF45 4220	HF45 4220	27 kΩ	HJ35 7270	HF85 7270
27 Ω	HJ35 4270	HF85 4270	30 kΩ	HF45 7300	HF45 7300
33 Ω	HF45 4330	HF45 4330	33 kΩ	HF45 7330	HF45 7330
39 Ω	HJ35 4470	HF85 4390	36 kΩ	HF45 7360	HF45 7360
47 Ω	HF45 4470	HF45 4470	39 kΩ	HF45 7390	HF45 7390
56 Ω	HF45 4560	HF45 4560	47 kΩ	HF45 7470	HF45 7470
68 Ω	HF45 4680	HF45 4680	51 kΩ	HF45 7510	HF45 7510
75 Ω	HF45 4750	HF45 4750	56 kΩ	HF45 7560	HF45 7560
82 Ω	HF45 4820	HF45 4820	62 kΩ	HF45 7620	HF45 7620
91 Ω	HF45 4910	HF45 4910	68 kΩ	HF45 7680	HF45 7680
100 Ω	HF45 5100	HF45 5100	82 kΩ	HF45 7820	HF45 7820
110 Ω	HJ35 5110	HF85 5110	91 kΩ	HF45 7910	HF45 7910
120 Ω	HF45 5120	HF45 5120	100 kΩ	HF45 8100	HF45 8100
150 Ω	HF45 5150	HF45 5150	110 kΩ	HF45 8110	HF45 8110
160 Ω	HJ35 5160	※	120 kΩ	HF45 8120	HF45 8120
180 Ω	HF45 5180	HF45 5180	150 kΩ	HF45 8150	HF45 8150
200 Ω	HF45 5200	HF45 5200	180 kΩ	HF45 8180	HF45 8180
220 Ω	HF45 5220	HF45 5220	220 kΩ	HJ35 8220	HF85 8220
270 Ω	HF45 5270	HF45 5270	270 kΩ	HF45 8270	HF45 8270
330 Ω	HF45 5330	HF45 5330	300 kΩ	HF45 8300	HF45 8300
390 Ω	HF45 5390	HF45 5390	330 kΩ	HF45 8330	HF45 8330
430 Ω	HF45 5430	HF45 5430	390 kΩ	HJ35 8390	HF85 8390
470 Ω	HF45 5470	HF45 5470	470 kΩ	HF45 8470	HF45 8470
510 Ω	HF45 5510	HF45 5510	560 kΩ	HJ35 8560	HF85 8560
560 Ω	HF45 5560	HF45 5560	680 kΩ	HJ35 8680	HF85 8680
680 Ω	HF45 5680	HF45 5680	820 kΩ	HJ35 8820	HF85 8820
820 Ω	HF45 5820	HF45 5820	1.0 MΩ	HF45 9100	HF45 9100
910 Ω	HF45 5910	HF45 5910	1.2 MΩ	HJ35 9120	※
1.0 kΩ	HF45 6100	HF45 6100	1.5 MΩ	HJ35 9150	HF85 9150
1.2 kΩ	HF45 6120	HF45 6120	1.8 MΩ	HJ35 9180	HF85 9180
1.5 kΩ	HF45 6150	HF45 6150	2.2 MΩ	HJ35 9220	HF85 9220
1.8 kΩ	HF45 6180	HF45 6180	3.3 MΩ	HJ35 9330	HF85 9330
2.0 kΩ	HJ35 6200	HF85 6200	3.9 MΩ	HJ35 9390	※
2.2 kΩ	HF45 6220	HF45 6220	4.7 MΩ	HJ35 9470	HF85 9470
2.4 kΩ	HJ35 6240	HF85 6240			
2.7 kΩ	HF45 6270	HF45 6270			
3.0 kΩ	HF45 6300	HF45 6300			
3.3 kΩ	HF45 6330	HF45 6330			
3.6 kΩ	HJ35 6360	HF85 6360			
3.9 kΩ	HF45 6390	HF45 6390			
4.7 kΩ	HF45 6470	HF45 6470			
5.1 kΩ	HF45 6510	HF45 6510			
5.6 kΩ	HF45 6560	HF45 6560			
6.8 kΩ	HF45 6680	HF45 6680			
8.2 kΩ	HF45 6820	HF45 6820			
9.1 kΩ	HF45 6910	HF45 6910			



※ : Not available

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

■ EXPLODED VIEW

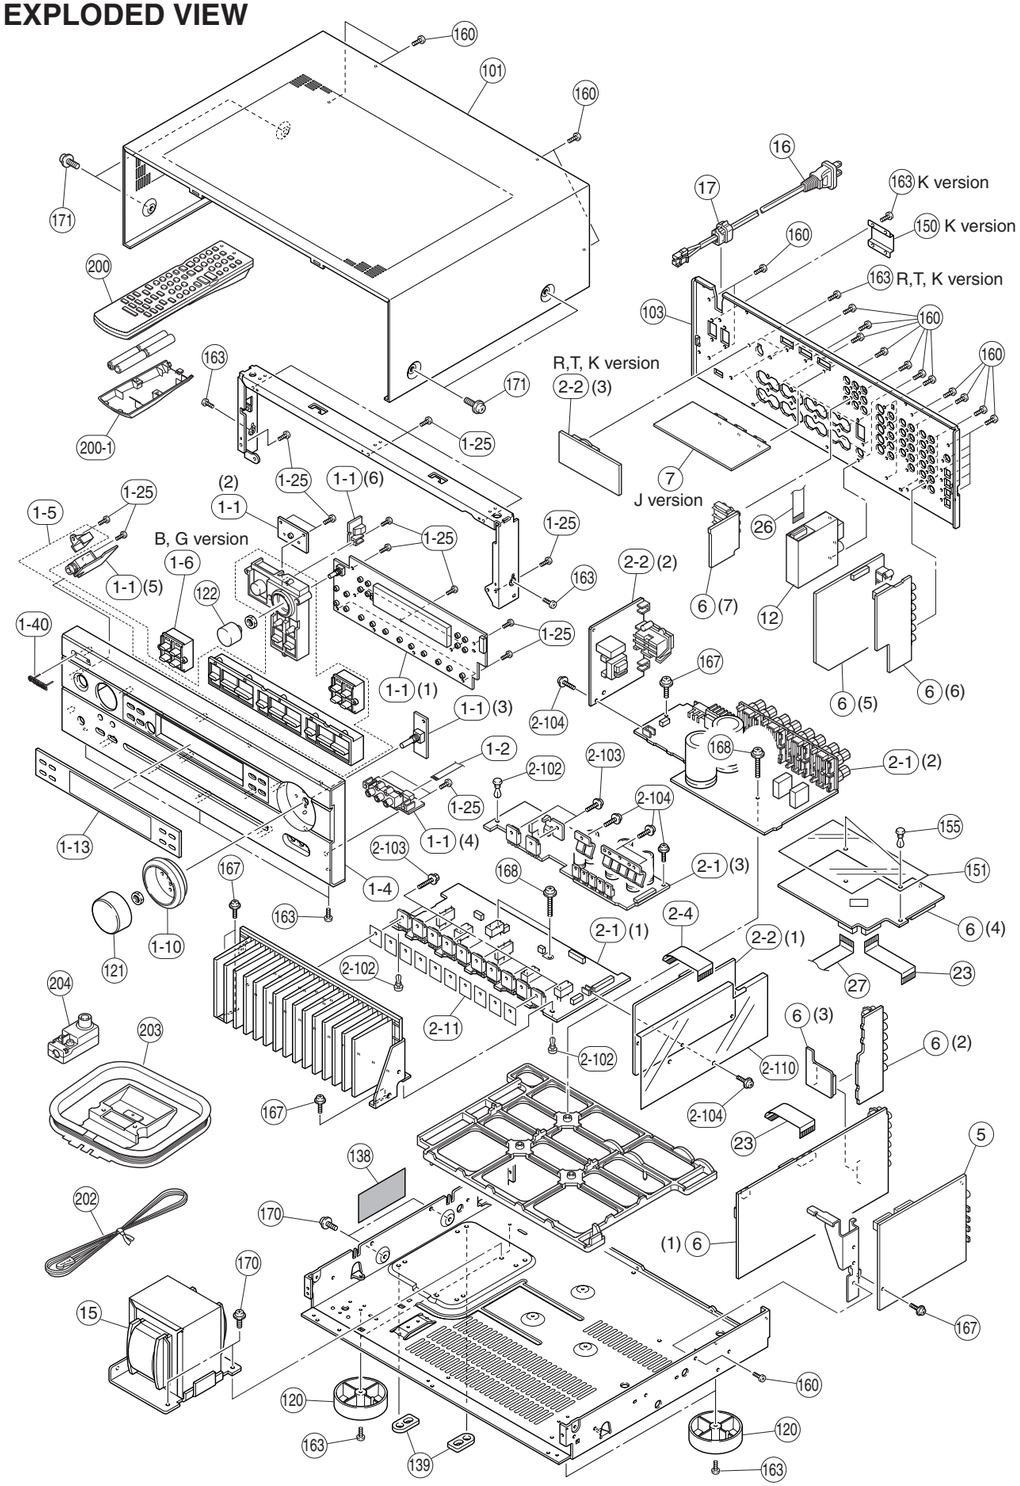

■ MECHANICAL PARTS

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	1-1	WA708400	P.C.B. ASS'Y	OPERATION		JUCRTKAL	ＰＣＢ　オペレーション	
*	1-1	WA708500	P.C.B. ASS'Y	OPERATION		BG	ＰＣＢ　オペレーション	
	1-2	MF106180	FLEXIBLE FLAT CABLE	6P 180mm P=1.25			カード電線　Ｃ＆Ｃ	02
*	1-4	WA283600	FRONT PANEL		AX540GD	J	フロントパネル	
*	1-4	WA282200	FRONT PANEL		V540GD	RKL	フロントパネル	
*	1-4	WB193600	FRONT PANEL		V540GD	T	フロントパネル	
*	1-4	WA282500	FRONT PANEL		V540RDSGD	G	フロントパネル	
*	1-4	WA278800	FRONT PANEL		V540BL	UCRA	フロントパネル	
*	1-4	WA279200	FRONT PANEL		V540RDSBL	BG	フロントパネル	
*	1-4	WA282600	FRONT PANEL		V540RDSTI	BG	フロントパネル	
*	1-4	WA282900	FRONT PANEL		5650GD	K	フロントパネル	
*	1-4	WB193700	FRONT PANEL		5650GD	T	フロントパネル	
*	1-4	WA279600	FRONT PANEL		5650BL	UC	フロントパネル	
*	1-4	WA280100	FRONT PANEL		5650RDSBL	G	フロントパネル	
*	1-4	WA283000	FRONT PANEL		5650SI	UCA	フロントパネル	
*	1-4	WA283500	FRONT PANEL		5650RDSSI	BG	フロントパネル	
*	1-5	WA473600	BUTTONCASE		V540GD,5650GD		ボタンケース	
*	1-5	WA286300	BUTTONCASE		V540BL		ボタンケース	
*	1-5	WA473700	BUTTONCASE		V540RDSTI		ボタンケース	
*	1-5	WA286600	BUTTONCASE		5650BL		ボタンケース	
*	1-5	WA661000	BUTTONCASE		5650SI		ボタンケース	
*	1-6	WA287200	BUTTON/RDS		V540RDSGD		ボタン／ＲＤＳ	
*	1-6	WA287100	BUTTON/RDS		V540/5650RDSBL		ボタン／ＲＤＳ	
*	1-6	WA287300	BUTTON/RDS		V540RDSTI		ボタン／ＲＤＳ	
*	1-6	WA750100	BUTTON/RDS		5650RDSSI		ボタン／ＲＤＳ	
*	1-10	WA287500	ESCUTCHEON/VOL		V540GD		エスカッション／ＶＯＬ	
*	1-10	WA287400	ESCUTCHEON/VOL		V540BL,5650BL		エスカッション／ＶＯＬ	
*	1-10	WA287600	ESCUTCHEON/VOL		V540TI,5650GD		エスカッション／ＶＯＬ	
*	1-10	WA750300	ESCUTCHEON/VOL		5650SI		エスカッション／ＶＯＬ	
*	1-13	WA290500	SHEET, WINDOW		540,5650GDSI	JUCRTKAL	シート／ウインドウ	
*	1-13	WA290800	SHEET, WINDOW		V540RDS	BG	シート／ウインドウ	
*	1-13	WA290700	SHEET, WINDOW		5650BL	UC	シート／ウインドウ	
*	1-13	WA291000	SHEET, WINDOW		5650RDSBL	G	シート／ウインドウ	
	1-25	EP630220	BIND HEAD P-TITE SCREW	3x8 MFZN2BL			バインドＰタイトネジ	01
	1-40	V6034200	EMBLEM		V540GD,5650GDBL		エンブレム	03
	1-40	V6034100	EMBLEM		V540BLTI,5650SI		エンブレム	
*	2-1	WA700400	P.C.B. ASS'Y	MAIN		J	ＰＣＢ　メイン	
*	2-1	WA700500	P.C.B. ASS'Y	MAIN		UC	ＰＣＢ　メイン	
*	2-1	WA700600	P.C.B. ASS'Y	MAIN		RA	ＰＣＢ　メイン	
*	2-1	WB224900	P.C.B. ASS'Y	MAIN		T	ＰＣＢ　メイン	
*	2-1	WA700700	P.C.B. ASS'Y	MAIN		KBGL	ＰＣＢ　メイン	
*	2-2	WA702600	P.C.B. ASS'Y	POWER		J	ＰＣＢ　パワー	
*	2-2	WA702700	P.C.B. ASS'Y	POWER		UC	ＰＣＢ　パワー	
*	2-2	WA702800	P.C.B. ASS'Y	POWER		RK	ＰＣＢ　パワー	
*	2-2	WB225100	P.C.B. ASS'Y	POWER		T	ＰＣＢ　パワー	
*	2-2	WA702900	P.C.B. ASS'Y	POWER		A	ＰＣＢ　パワー	
*	2-2	WA703000	P.C.B. ASS'Y	POWER		B	ＰＣＢ　パワー	
*	2-2	WA703100	P.C.B. ASS'Y	POWER		GL	ＰＣＢ　パワー	
	2-4	MF117070	FLEXIBLE FLAT CABLE	17P 70mm P=1.25			カード電線　Ｃ＆Ｃ	
	2-11	VV849300	SHEET	19x24			シート／放熱	01
	2-102	VQ368600	PUSH RIVET	P3555-B			プッシュリベット	01
	2-103	VK173200	SCREW, TRANSISTOR	3x15 SP MFC2			スクリューＴＲ	01
	2-104	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2			ＰＷヘッドＢタイトネジ	01
*	2-110	WA744400	SHEET				シート／バリア	

＊New Parts　＊新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	5	WA704200	P.C.B. ASS'Y	DSP		J	ＰＣＢ　ＤＳＰ	
*	5	WA704300	P.C.B. ASS'Y	DSP		UCRTKABGL	ＰＣＢ　ＤＳＰ	
*	6	WA707000	P.C.B. ASS'Y	FUNCTION		J	ＰＣＢ　ファンクション	
*	6	WA707100	P.C.B. ASS'Y	FUNCTION		UC	ＰＣＢ　ファンクション	
*	6	WA707200	P.C.B. ASS'Y	FUNCTION		RK	ＰＣＢ　ファンクション	
*	6	WB225700	P.C.B. ASS'Y	FUNCTION		T	ＰＣＢ　ファンクション	
*	6	WA707300	P.C.B. ASS'Y	FUNCTION		AL	ＰＣＢ　ファンクション	
*	6	WA707400	P.C.B. ASS'Y	FUNCTION		BG	ＰＣＢ　ファンクション	
*	7	WA709000	P.C.B. ASS'Y	VIDEO		J	ＰＣＢ　ビデオ	
	12	V6782200	AM/FM TUNER	TFCE1J117A		J	ＡＭ／ＦＭ　チューナ	13
*	12	V6782300	AM/FM TUNER	TFCE1U115A		UCRTK	ＡＭ／ＦＭ　チューナ	
*	12	V6782400	AM/FM TUNER	TFCE1E317A		ABGL	ＡＭ／ＦＭ　チューナ	
* ⚠	15	X3914A00	POWER TRANSFORMER			J	電源トランス	
* ⚠	15	X3915A00	POWER TRANSFORMER			UC	電源トランス	
* ⚠	15	X3916A00	POWER TRANSFORMER			RTK	電源トランス	
* ⚠	15	X3917A00	POWER TRANSFORMER			A	電源トランス	
* ⚠	15	X3918A00	POWER TRANSFORMER			BGL	電源トランス	
⚠	16	V2723100	POWER CABLE	1.8m		J	電源コード	07
* ⚠	16	V2363800	POWER CABLE	2m		UC	電源コード	
⚠	16	VN363200	POWER CABLE	2m		R	電源コード	04
* ⚠	16	WB120600	POWER CABLE	2m		T	電源コード	
* ⚠	16	V8013000	POWER CABLE	2m		K	電源コード	
⚠	16	V2296800	POWER CABLE	2m		A	電源コード	
⚠	16	VV437300	POWER CABLE	2m		B	電源コード	08
⚠	16	VN363700	POWER CABLE	2m		GL	電源コード	04
	17	V2438700	CORD STOPPER	10P1			コードストッパー	02
	23	MF117070	FLEXIBLE FLAT CABLE	17P 70mm P=1.25			カード電線　Ｃ＆Ｃ	
	26	MF115070	FLEXIBLE FLAT CABLE	15P 70mm P=1.25			カード電線　Ｃ＆Ｃ	
	27	MF117350	FLEXIBLE FLAT CABLE	17P 350mm P=1.25			カード電線　Ｃ＆Ｃ	
*	101	WA291800	TOP COVER		V540GD,5650GD	JUCRKABGL	トップカバー	
*	101	WA788800	TOP COVER		V540GD,5650GD	T	トップカバー	
*	101	WA291700	TOP COVER		V540BL,5650BL		トップカバー	
*	101	WA291900	TOP COVER		V540TI,5650SI		トップカバー	
*	103	WA273500	REAR PANEL		AX540	J	リヤパネル	
*	103	WA272200	REAR PANEL		V540	UC	リヤパネル	
*	103	WA272300	REAR PANEL		V540	RTK	リヤパネル	
*	103	WA272400	REAR PANEL		V540	A	リヤパネル	
*	103	WA272700	REAR PANEL		V540RDS	B	リヤパネル	
*	103	WA272800	REAR PANEL		V540RDS	G	リヤパネル	
*	103	WA272500	REAR PANEL		V540	L	リヤパネル	
*	103	WA272900	REAR PANEL		5650	UC	リヤパネル	
*	103	WA273000	REAR PANEL		5650	TK	リヤパネル	
*	103	WA273100	REAR PANEL		5650	A	リヤパネル	
*	103	WA273300	REAR PANEL		5650RDS	B	リヤパネル	
*	103	WA273400	REAR PANEL		5650RDS	G	リヤパネル	
	120	V0042500	LEG	D60xH21	V540GD,5650GD		レッグ	03
	120	VS025000	LEG	D60xH21	V540BLTI,5650SI		レッグ	02
	120	VV544300	LEG	D60xH21	5650BL		レッグ　（ＢＫ）	02
	121	V9120000	KNOB D47		V540GD,5650GD		ノブ　Ｄ４７	
*	121	V9119800	KNOB D47		V540BL,5650BL		ノブ　Ｄ４７	
*	121	V9120200	KNOB D47		V540TI		ノブ　Ｄ４７	
*	121	WA750500	KNOB D47		5650SI		ノブ　Ｄ４７	
*	122	WA288800	KNOB D24		V540GD,5650GD		ノブ　Ｄ２４	
*	122	WA288700	KNOB D24		V540BL,5650BL		ノブ　Ｄ２４	

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	122	WA288900	KNOB D24		V540TI		ノブ　Ｄ２４	
*	122	WA750400	KNOB D24		5650SI		ノブ　Ｄ２４	
	138	V3198100	DAMPER	GUARD			ダンパー	01
	139	V7616600	DAMPER	SCREW MASK			ダンパー	
*	150	V8466300	COVER/AC OUTLETS			K	カバー／ＡＣアウトレット	
*	151	WB106900	BARRIER/TOP				バリア／トップ	
	155	V0368600	PUSH RIVET	P3555-B			プッシュリベット	01
	160	VN413300	BIND HEAD BONDING B-T. SCREW	3x8 MFZN2BL			ボンディングＢタイトネジ	01
	163	EP600250	BIND HEAD B-TITE SCREW	3x8 MFZN2Y			バインドＢタイトネジ	01
	167	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2			ＰＷヘッドＢタイトネジ	01
	168	VT669400	PW HEAD B-TITE SCREW	3x15-8 MFC2			ＰＷヘッドＢタイトネジ	01
	170	WA247600	SCREW/TRANS #S	4x10-10 MFZN2Y			スクリュートランス＃Ｓ	01
	171	VD069600	PW HEAD S-TITE SCREW	4x8-10 MFNI33	GD,SI,TI		ＰＷヘッドＳタイトネジ	01
	171	21991500	PW HEAD S-TITE SCREW	4x8-10 MFC2BL	BL		ＰＷヘッドＳタイトネジ	01
			ACCESSORIES				付属品	
*	200	WA164100	REMOTE CONTROL	RAV246	BW0917	JUCRTKAL	リモコン	
*	200	WA164200	REMOTE CONTROL	RAV247	BW0918	BG	リモコン	
	200-1	AAX34140	BATTERY COVER		71-0910-02000		電池蓋	05
	202	V6267000	INDOOR FM ANTENNA	1.4m 1pc		JUCRTK	ＦＭ簡易アンテナ	03
	202	VQ147100	INDOOR FM ANTENNA	1.4m 1pc		ABGL	ＦＭ簡易アンテナ	02
	203	VR248500	AM LOOP ANTENNA	1.0m 1pc			ＡＭループアンテナ	03
	204	VE364900	ANTENNA ADAPTER	PAL 75-300Ω		B	整合器	03
			BATTERY, MANGANESE	UM-4NE (2PC)			マンガン電池　２ＰＣ	

※ New Parts　＊ 新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

■ EXPLODED VIEW

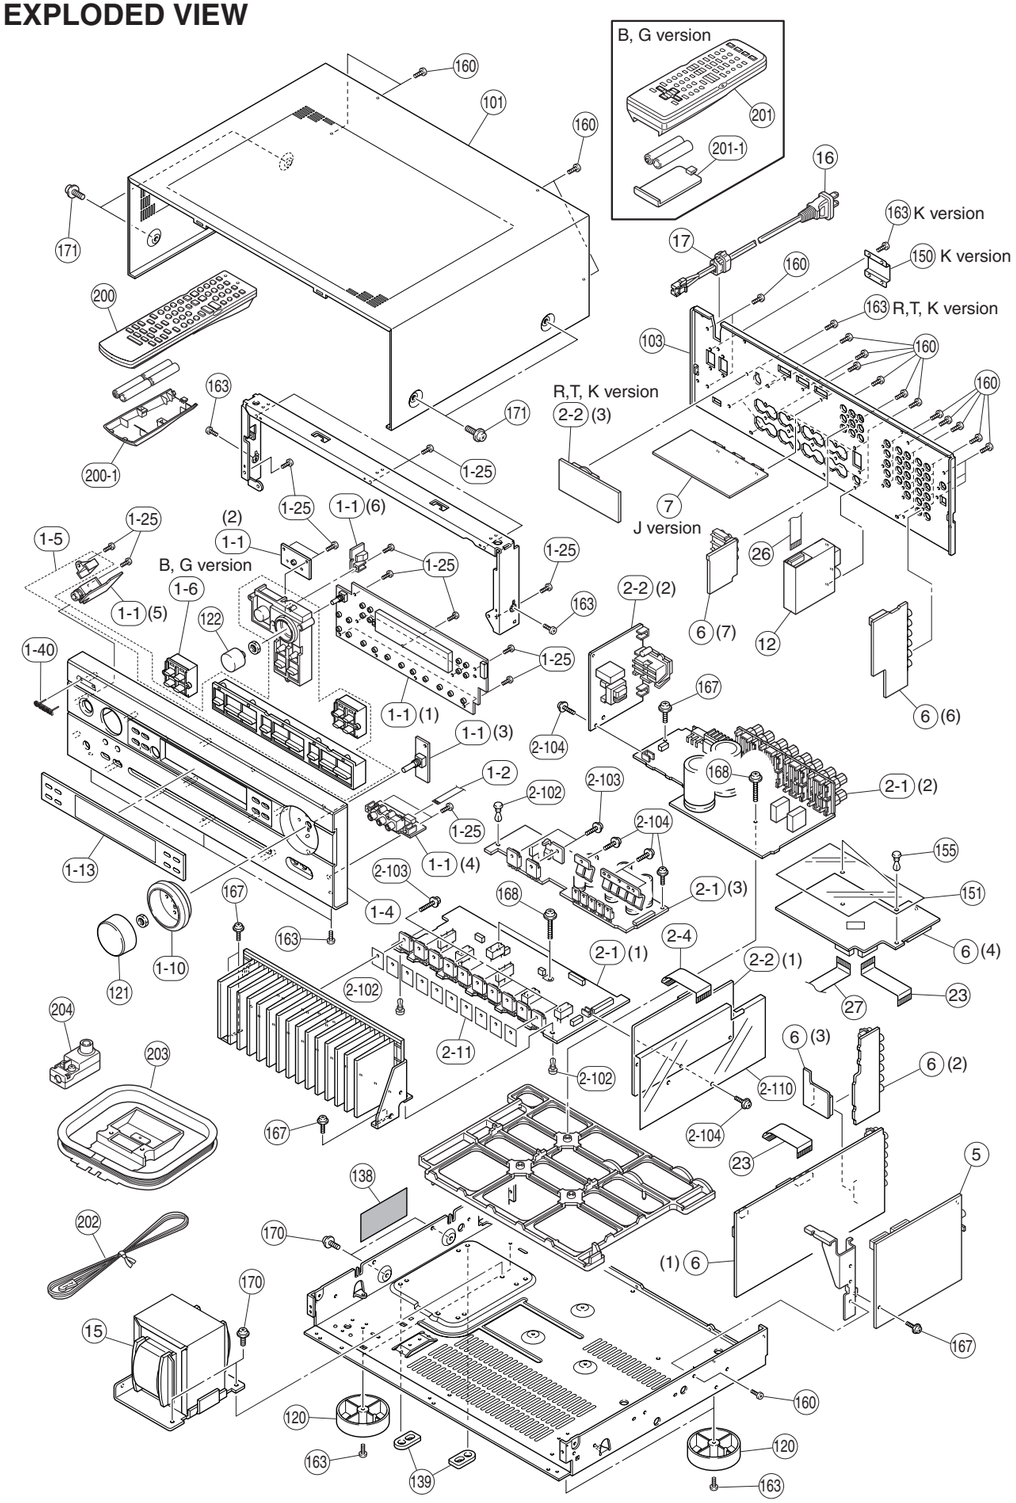

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

■ MECHANICAL PARTS

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	1-1	WA708400	P.C.B. ASS'Y	OPERATION		JUCRTKAL	ＰＣＢ　オペレーション	
*	1-1	WA708500	P.C.B. ASS'Y	OPERATION		BG	ＰＣＢ　オペレーション	
	1-2	MF106180	FLEXIBLE FLAT CABLE	6P 180mm P=1.25			カード電線　Ｃ＆Ｃ	02
*	1-4	WA285100	FRONT PANEL		AX440GD	J	フロントパネル	
*	1-4	WA283800	FRONT PANEL		V440GD	RKL	フロントパネル	
*	1-4	WB193800	FRONT PANEL		V440GD	T	フロントパネル	
*	1-4	WA284100	FRONT PANEL		V440RDSGD	G	フロントパネル	
*	1-4	WA280600	FRONT PANEL		V440BL	UCRA	フロントパネル	
*	1-4	WA280900	FRONT PANEL		V440RDSBL	BG	フロントパネル	
*	1-4	WA284200	FRONT PANEL		V440RDSTI	BG	フロントパネル	
*	1-4	WA610900	FRONT PANEL		AX440SI	J	フロントパネル	
*	1-4	WA658500	FRONT PANEL		V440SI	RL	フロントパネル	
*	1-4	WA284500	FRONT PANEL		5640GD	K	フロントパネル	
*	1-4	WB193900	FRONT PANEL		5640GD	T	フロントパネル	
*	1-4	WA281300	FRONT PANEL		5640BL	UC	フロントパネル	
*	1-4	WA281700	FRONT PANEL		5640RDSBL	G	フロントパネル	
*	1-4	WA284600	FRONT PANEL		5640SI	UCA	フロントパネル	
*	1-4	WA284900	FRONT PANEL		5640RDSSI	BG	フロントパネル	
*	1-5	WA473600	BUTTONCASE		V440GD,5640GD		ボタンケース	
*	1-5	WA286300	BUTTONCASE		V440BL		ボタンケース	
*	1-5	WA473700	BUTTONCASE		V440RDSTI		ボタンケース	
*	1-5	WA661000	BUTTONCASE		V440SI,5640SI		ボタンケース	
*	1-5	WA286600	BUTTONCASE		5640BL		ボタンケース	
*	1-6	WA287200	BUTTON/RDS		V440RDSGD		ボタン／ＲＤＳ	
*	1-6	WA287100	BUTTON/RDS		V440/5640 RDSBL		ボタン／ＲＤＳ	
*	1-6	WA287300	BUTTON/RDS		V440RDSTI		ボタン／ＲＤＳ	
*	1-6	WA750100	BUTTON/RDS		5640RDSSI		ボタン／ＲＤＳ	
*	1-10	WA287500	ESCUTCHEON/VOL		V440GD		エスカッション／ＶＯＬ	
*	1-10	WA287400	ESCUTCHEON/VOL		V440BL,5640BL		エスカッション／ＶＯＬ	
*	1-10	WA287600	ESCUTCHEON/VOL		V440TI,5640GD		エスカッション／ＶＯＬ	
*	1-10	WA750300	ESCUTCHEON/VOL		V440SI,5640SI		エスカッション／ＶＯＬ	
*	1-13	WA290500	SHEET, WINDOW		V440,5640GDSI	JUCRTKAL	シート／ウインドウ	
*	1-13	WA290800	SHEET, WINDOW		V440RDS	BG	シート／ウインドウ	
*	1-13	WA290700	SHEET, WINDOW		5640BL	UC	シート／ウインドウ	
*	1-13	WA291000	SHEET, WINDOW		5640RDSBL	G	シート／ウインドウ	
	1-25	EP630220	BIND HEAD P-TITE SCREW	3x8 MFZN2BL			バインドＰタイトネジ	01
	1-40	V6034200	EMBLEM		V440GD,5640GDBL		エンブレム	03
	1-40	V6034100	EMBLEM		V440BTS,5640SI		エンブレム	
*	2-1	WA700800	P.C.B. ASS'Y	MAIN		J	ＰＣＢ　メイン	
*	2-1	WA700900	P.C.B. ASS'Y	MAIN		UC	ＰＣＢ　メイン	
*	2-1	WA701000	P.C.B. ASS'Y	MAIN		RA	ＰＣＢ　メイン	
*	2-1	WB225000	P.C.B. ASS'Y	MAIN		T	ＰＣＢ　メイン	
*	2-1	WA701100	P.C.B. ASS'Y	MAIN		KBGL	ＰＣＢ　メイン	
*	2-2	WA703200	P.C.B. ASS'Y	POWER		J	ＰＣＢ　パワー	
*	2-2	WA703300	P.C.B. ASS'Y	POWER		UC	ＰＣＢ　パワー	
*	2-2	WA703400	P.C.B. ASS'Y	POWER		RK	ＰＣＢ　パワー	
*	2-2	WB225300	P.C.B. ASS'Y	POWER		T	ＰＣＢ　パワー	
*	2-2	WA703500	P.C.B. ASS'Y	POWER		A	ＰＣＢ　パワー	
*	2-2	WA703600	P.C.B. ASS'Y	POWER		B	ＰＣＢ　パワー	
*	2-2	WA703700	P.C.B. ASS'Y	POWER		GL	ＰＣＢ　パワー	
	2-4	MF117070	FLEXIBLE FLAT CABLE	17P 70mm P=1.25			カード電線　Ｃ＆Ｃ	
	2-11	VV849300	SHEET	19x24			シート／放熱	01
	2-102	VQ368600	PUSH RIVET	P3555-B			プッシュリベット	01
	2-103	VK173200	SCREW, TRANSISTOR	3x15 SP MFC2			スクリューＴＲ	01

＊New Parts　＊新規部品（マーク#の部品は、基板に含まれません）

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
	2-104	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2			PWヘッドBタイトネジ	01
*	2-110	WA744400	SHEET				シート/バリア	
*	5	WA704400	P.C.B. ASS'Y	DSP		J	PCB DSP	
*	5	WA704500	P.C.B. ASS'Y	DSP		UCRTKABGL	PCB DSP	
*	6	WA707500	P.C.B. ASS'Y	FUNCTION		J	PCB ファンクション	
*	6	WA707600	P.C.B. ASS'Y	FUNCTION		UC	PCB ファンクション	
*	6	WA707700	P.C.B. ASS'Y	FUNCTION		RK	PCB ファンクション	
*	6	WB225800	P.C.B. ASS'Y	FUNCTION		T	PCB ファンクション	
*	6	WA707800	P.C.B. ASS'Y	FUNCTION		AL	PCB ファンクション	
*	6	WA707900	P.C.B. ASS'Y	FUNCTION		BG	PCB ファンクション	
*	7	WA709000	P.C.B. ASS'Y	VIDEO		J	PCB ビデオ	
	12	V6782200	AM/FM TUNER	TFCE1J117A		J	AM/FM チューナ	13
*	12	V6782300	AM/FM TUNER	TFCE1U115A		UCRTK	AM/FM チューナ	
*	12	V6782400	AM/FM TUNER	TFCE1E317A		ABGL	AM/FM チューナ	
* ⚠	15	X3914A00	POWER TRANSFORMER			J	電源トランス	
* ⚠	15	X3915A00	POWER TRANSFORMER			UC	電源トランス	
* ⚠	15	X3916A00	POWER TRANSFORMER			RTK	電源トランス	
* ⚠	15	X3917A00	POWER TRANSFORMER			A	電源トランス	
* ⚠	15	X3918A00	POWER TRANSFORMER			BGL	電源トランス	
⚠	16	V2723100	POWER CABLE	1.8m		J	電源コード	07
* ⚠	16	V2363800	POWER CABLE	2m		UC	電源コード	
⚠	16	VN363200	POWER CABLE			R	電源コード	04
* ⚠	16	WB120600	POWER CABLE	2m		T	電源コード	
* ⚠	16	V8013000	POWER CABLE	2m		K	電源コード	
⚠	16	V2296800	POWER CABLE	2m		A	電源コード	
⚠	16	VV437300	POWER CABLE	2m		B	電源コード	08
⚠	16	VN363700	POWER CABLE	2m		GL	電源コード	04
	17	V2438700	CORD STOPPER	10P1			コードストッパー	02
	23	MF117070	FLEXIBLE FLAT CABLE	17P 70mm P=1.25			カード電線 C&C	
	26	MF115070	FLEXIBLE FLAT CABLE	15P 70mm P=1.25			カード電線 C&C	
	27	MF117350	FLEXIBLE FLAT CABLE	17P 350mm P=1.25			カード電線 C&C	
*	101	WA291800	TOP COVER		V440GD,5640GD	JUCRKABGL	トップカバー	
*	101	WA788800	TOP COVER		V440GD,5640GD	T	トップカバー	
*	101	WA291700	TOP COVER		V440BL,5640BL		トップカバー	
*	101	WA291900	TOP COVER		V440TISI,5640SI		トップカバー	
*	103	WA274900	REAR PANEL		AX440	J	リヤパネル	
*	103	WA273600	REAR PANEL		V440	UC	リヤパネル	
*	103	WA273700	REAR PANEL		V440	RTK	リヤパネル	
*	103	WA273800	REAR PANEL		V440	A	リヤパネル	
*	103	WA274100	REAR PANEL		V440RDS	B	リヤパネル	
*	103	WA274200	REAR PANEL		V440RDS	G	リヤパネル	
*	103	WA273900	REAR PANEL		V440	L	リヤパネル	
*	103	WA274300	REAR PANEL		5640	UC	リヤパネル	
*	103	WA274400	REAR PANEL		5640	TK	リヤパネル	
*	103	WA274500	REAR PANEL		5640	A	リヤパネル	
*	103	WA274700	REAR PANEL		5640RDS	B	リヤパネル	
*	103	WA274800	REAR PANEL		5640RDS	G	リヤパネル	
	120	V0042500	LEG	D60xH21	V440GD,5640GD		レッグ	03
	120	VS025000	LEG	D60xH21	V440BTS,5640SI		レッグ	02
	120	VV544300	LEG	D60xH21	5640BL		レッグ (BK)	02
	121	V9120000	KNOB D47		V440GD,5640GD		ノブ D47	
*	121	V9119800	KNOB D47		V440BL,5640BL		ノブ D47	
*	121	V9120200	KNOB D47		V440TI		ノブ D47	
*	121	WA750500	KNOB D47		V440SI,5640SI		ノブ D47	

※ New Parts ＊ 新規部品(マーク#の部品は、基板に含まれません)

RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

	Schm Ref.	PART NO.	Description		Remarks	Markets	部 品 名	Rank
*	122	WA288800	KNOB D24		GD		ノブ D24	
*	122	WA288700	KNOB D24		BL		ノブ D24	
*	122	WA288900	KNOB D24		TI		ノブ D24	
*	122	WA750400	KNOB D24		5650SI		ノブ D24	
	138	V3198100	DAMPER	GUARD			ダンパー	01
	139	V7616600	DAMPER				ダンパー	
*	150	V8466300	COVER/AC OUTLETS			K	カバー/ACアウトレット	
*	151	WB106900	BARRIER/TOP				バリア/トップ	
	155	VQ368600	PUSH RIVET	P3555-B			プッシュリベット	01
	160	VN413300	BIND HEAD BONDING B-T. SCREW	3x8 MFZN2BL			ボンディングBタイトネジ	01
	163	EP600250	BIND HEAD B-TITE SCREW	3x8 MFZN2Y			バインドBタイトネジ	01
	167	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2			PWヘッドBタイトネジ	01
	168	VT669400	PW HEAD B-TITE SCREW	3x15-8 MFC2			PWヘッドBタイトネジ	01
	170	WA247600	SCREW/TRANS #S	4x10-10 MFZN2Y			スクリュートランス#S	01
	171	VD069600	PW HEAD S-TITE SCREW	4x8-10 MFNI33	GD,SI,TI		PWヘッドSタイトネジ	01
	171	21991500	PW HEAD S-TITE SCREW	4x8-10 MFC2BL	BL		PWヘッドSタイトネジ	01
			ACCESSORIES				付属品	
*	200	WA164100	REMOTE CONTROL	RAV246	BW0917	JUCRTKAL	リモコン	
	200-1	AAX34140	BATTERY COVER		71-0910-02000	JUCRTKAL	電池蓋	05
*	201	WA220300	REMOTE CONTROL	RAV300	RRC4001-1001LC	BG	リモコン	
*	201-1	AAX46580	BATTERY COVER		103RRC-244-01G	BG	電池蓋	03
	202	V6267000	INDOOR FM ANTENNA	1.4m 1pc		JUCRTK	FM簡易アンテナ	03
	202	VQ147100	INDOOR FM ANTENNA	1.4m 1pc		ABGL	FM簡易アンテナ	02
	203	VR248500	AM LOOP ANTENNA	1.0m 1pc			AMループアンテナ	03
	204	VE364900	ANTENNA ADAPTER	PAL 75-300Ω		B	整合器	03
			BATTERY, MANGANESE	UM-4NE (2PC)		JUCRTKAL	マンガン電池 2PC	
			BATTERY	SUM-3N		BG	乾電池	

※ New Parts ＊ 新規部品(マーク#の部品は、基板に含まれません)

■ REMOTE CONTROL RAV246 (RX-V540/HTR-5650/DSP-AX540/RX-V440/ HTR-5640/DSP-AX440), RAV247 (RX-V540RDS/HTR-5650RDS)

● SCHEMATIC DIAGRAM

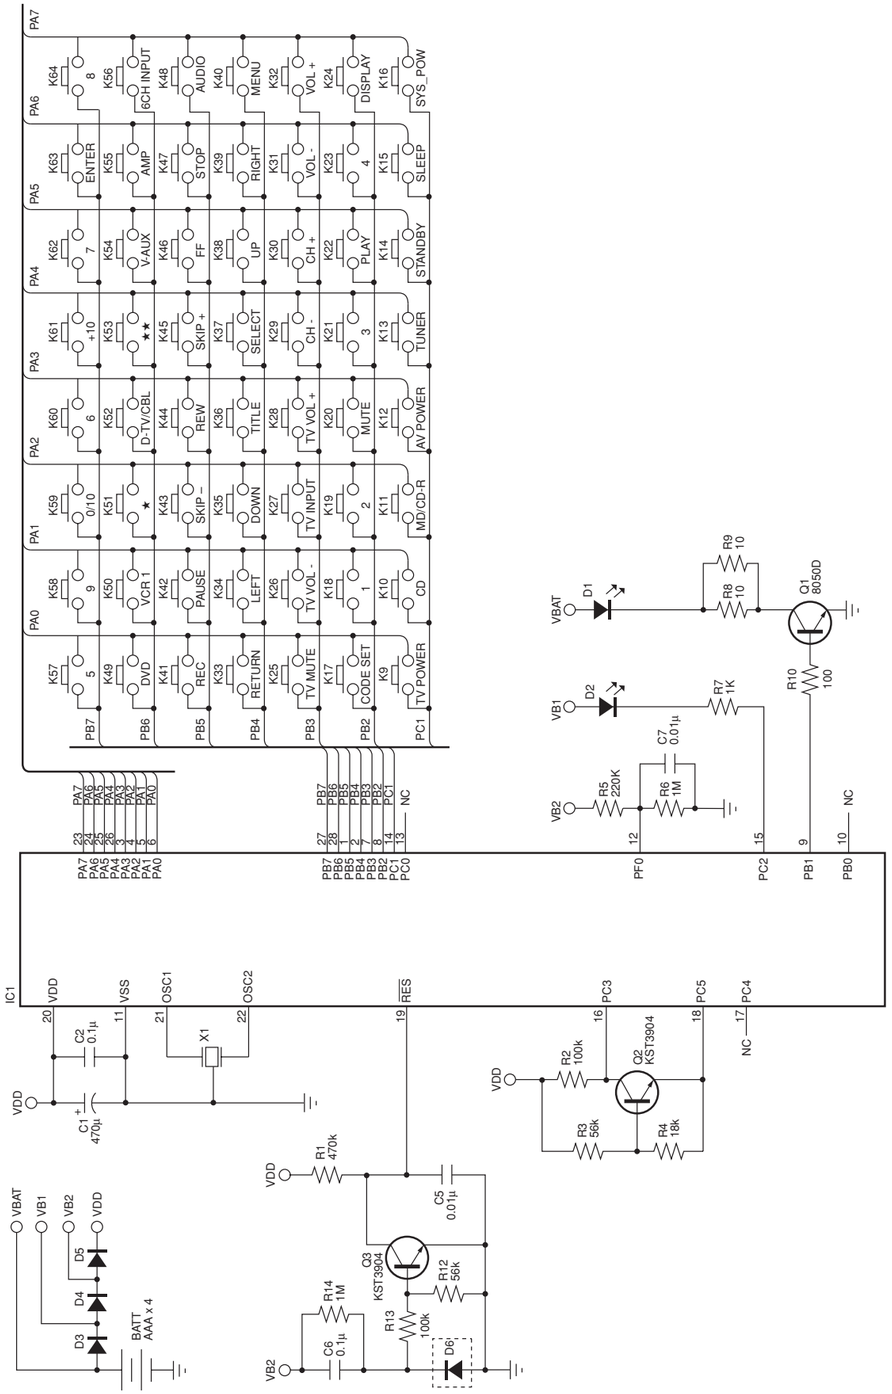

Key No.	Schematic Key No.	Function	YPC	ZONE2 MAIN	ZONE2 ZONE2	ZONE2 SYSTEM	DVD Yamaha3	DVD Yamaha4	LD Yamaha	CD Yamaha1	CD Yamaha2	CD-R Yamaha	MD Yamaha1	MD Yamaha2	TAPE Yamaha1	TAPE Yamaha2	TUNER Yamaha1	TUNER Yamaha2	AMP FIX
1	K17	CODE SET	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
2	K9	TV POWER	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
3	K12	AV POWER	–	–	–	–	7C-80	004.012	048.012	–	–	–	–	79-B5	–	–	–	–	–
4	K14	STANDBY	7A-1E	7E-7F	7E-BB	7A-1E	–	–	–	–	–	–	–	–	–	–	–	–	–
5	K16	SYSTEM POWER	7A-1D	7E-7E	7E-BA	7A-1D	–	–	–	–	–	–	–	–	–	–	–	–	–
6	K10	CD	7A-15	7A-15	7A-D1	–	–	–	–	–	–	–	–	–	–	–	–	–	–
7	K11	MD/CD-R	7A-C9	7A-C9	7A-CF	–	–	–	–	–	–	–	–	–	–	–	–	–	–
8	K13	TUNER	7A-16	7A-16	7A-D2	–	–	–	–	–	–	–	–	–	–	–	–	–	–
9	K15	SLEEP	7A-57	7A-57	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
10	K49	DVD	7A-C1	7A-C1	7A-CD	–	–	–	–	–	–	–	–	–	–	–	–	–	–
11	K52	D-TV/CBL	7A-54	7A-54	7A-D9	–	–	–	–	–	–	–	–	–	–	–	–	–	–
12	K54	V-AUX	7A-55	7A-55	7A-D8	–	–	–	–	–	–	–	–	–	–	–	–	–	–
13	K56	6CH INPUT	7A-87	7A-87	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
14	K50	VCR	7A-0F	7A-0F	7A-D6	–	–	–	–	–	–	–	–	–	–	–	–	–	–
15	K51	★	7A-13	7A-13	7A-D7	–	–	–	–	–	–	–	–	–	–	–	–	–	–
16	K53	★★	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
17	K55	AMP	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
18	K28	TV VOL +	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
19	K30	TV CH +	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
20	K32	VOLUME +	7A-1A	7A-1A	–	–	–	–	–	–	–	7A-1A	–	–	–	–	–	–	–
21	K26	TV VOL –	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
22	K29	TV CH –	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
23	K31	VOLUME –	7A-1B	7A-1B	–	–	–	–	–	–	–	7A-1B	–	–	–	–	–	–	–
24	K25	TV MUTE	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
25	K27	TV INPUT	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
26	K20	MUTE	7A-1C	7A-1C	7A-DC	–	–	–	–	–	–	7A-1C	–	–	–	–	–	–	–
27	K18	1	–	–	–	–	7C-94	004.001	048.001	7C-17	79-11	7F-91	79-85	79-B7	–	–	7A-E5	D1-0E	7A-88
28	K19	2	–	–	–	–	7C-95	004.002	048.002	7C-18	79-12	7F-92	79-86	79-B8	–	–	7A-E6	D1-0F	7A-89
29	K21	3	–	–	–	–	7C-96	004.003	048.003	7C-19	79-13	7F-93	79-87	79-B9	–	–	7A-E7	D1-10	7A-8A
30	K23	4	–	–	–	–	7C-97	004.004	048.004	7C-1A	79-14	7F-94	79-88	79-BA	–	–	7A-E8	D1-11	7A-8B
31	K57	5	–	–	–	–	7C-98	004.005	048.005	7C-1B	79-15	7F-95	79-89	79-BB	–	–	7A-E9	D1-12	7A-8C
32	K60	6	–	–	–	–	7C-99	004.006	048.006	7C-1C	79-16	7F-96	79-8A	79-BC	–	–	7A-EA	D1-13	7A-8D
33	K62	7	–	–	–	–	7C-9A	004.007	048.007	7C-1D	79-17	7F-97	79-8B	79-BD	–	–	7A-EB	D1-14	7A-8E
34	K64	8	–	–	–	–	7C-9B	004.008	048.008	7C-1E	79-18	7F-98	79-8C	79-BE	–	–	7A-EC	D1-15	7A-8F
35	K58	9	–	–	–	–	7C-9C	004.009	048.009	7C-1F	79-19	7F-99	79-8D	79-BF	–	–	–	–	7A-90
36	K59	0	–	–	–	–	7C-93	004.000	048.000	7C-16	79-10	7F-90	79-8E	79-C0	–	–	–	–	7A-96
37	K61	+10	–	–	–	–	7C-9D	004.120	–	7C-5D	79-1A	7F-9A	79-8F	79-9F	–	–	–	–	7A-97
38	K63	ENTER	–	–	–	7A-1E	7C-9E	–	–	7C-15	79-0B	7F-8A	–	–	–	–	–	–	7A-56
39	K36	TITLE	–	–	–	–	7C-B1	004.113	048.200	–	–	–	–	–	–	–	–	–	7A-86
40	K38	^	–	–	–	–	7C-B4	004.088	048.088	–	–	–	–	–	–	–	7A-10	7A-10	7A-98
41	K40	MENU	–	–	–	–	7C-B2	004.084	048.084	–	–	–	–	–	–	–	7A-12	–	7A-9C
42	K34	<	–	–	–	–	7C-B5	004.090	048.090	–	–	–	–	–	–	–	–	–	7A-53
43	K37	SELECT	–	–	–	–	7C-B8	004.092	048.092	–	–	–	–	–	–	–	–	–	–
44	K39	>	–	–	–	–	7C-B6	004.091	048.091	–	–	–	–	–	–	–	–	–	7A-52
45	K33	RETURN	–	–	–	–	7C-B7	004.131	048.131	–	–	–	–	–	–	–	–	D1-0D	7A-85
46	K35	v	–	–	–	–	7C-B3	004.089	048.089	–	–	–	–	–	–	–	–	7A-11	7A-99
47	K24	DISPLAY	–	–	–	–	7C-A6	004.015	048.015	7C-13	79-0A	7F-9E	79-A5	79-A5	–	–	–	–	7A-C2
48	K41	REC	–	–	–	–	7C-8B	004.127	048.055	–	7A-4F	79-4F	–	79-AF	79-B1	7A-04	7F-04	–	–
49	K44	REW	–	–	–	–	7C-86	004.041	048.041	7C-06	7A-0D	79-05	7F-88	79-AC	79-AC	7A-01	7F-01	–	–
50	K46	FF	–	–	–	–	7C-87	004.040	048.040	7C-07	7A-0C	7F-89	79-AD	79-AD	7A-02	7F-02	–	–	–
51	K48	AUDIO	–	–	–	–	7C-AD	004.078	048.078	7C-12	–	–	–	–	7A-06	7F-06	–	–	–
52	K42	PAUSE	–	–	–	–	7C-83	004.048	048.048	7C-5A	7A-09	79-55	7F-83	79-A9	79-A9	–	–	–	–
53	K43	SKIP –	–	–	–	–	7C-B9	004.033	048.033	7C-02	7A-0B	79-04	7F-86	79-AB	79-AB	7A-07	7F-07	–	–
54	K45	SKIP +	–	–	–	–	7C-BA	004.032	048.032	7C-03	7A-0A	79-07	7F-87	79-AE	79-AE	7A-40	7F-08	–	–
55	K47	STOP	–	–	–	–	7C-85	004.049	048.049	7C-5B	7A-09	79-56	7F-84	79-AA	79-AA	7A-03	7F-03	–	–
56	K22	PLAY	–	–	–	–	7C-82	004.044	048.044	7C-05	7A-08	79-02	7F-82	79-A8	79-A8	7A-00	7F-00	–	–

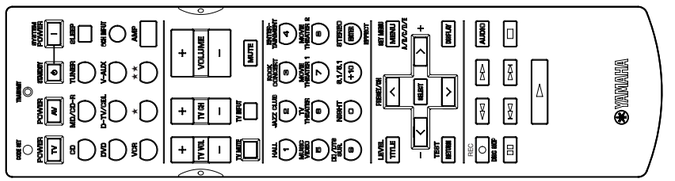

■ REMOTE CONTROL RAV300 (RX-V440RDS/HTR-5640RDS)

● SCHEMATIC DIAGRAM

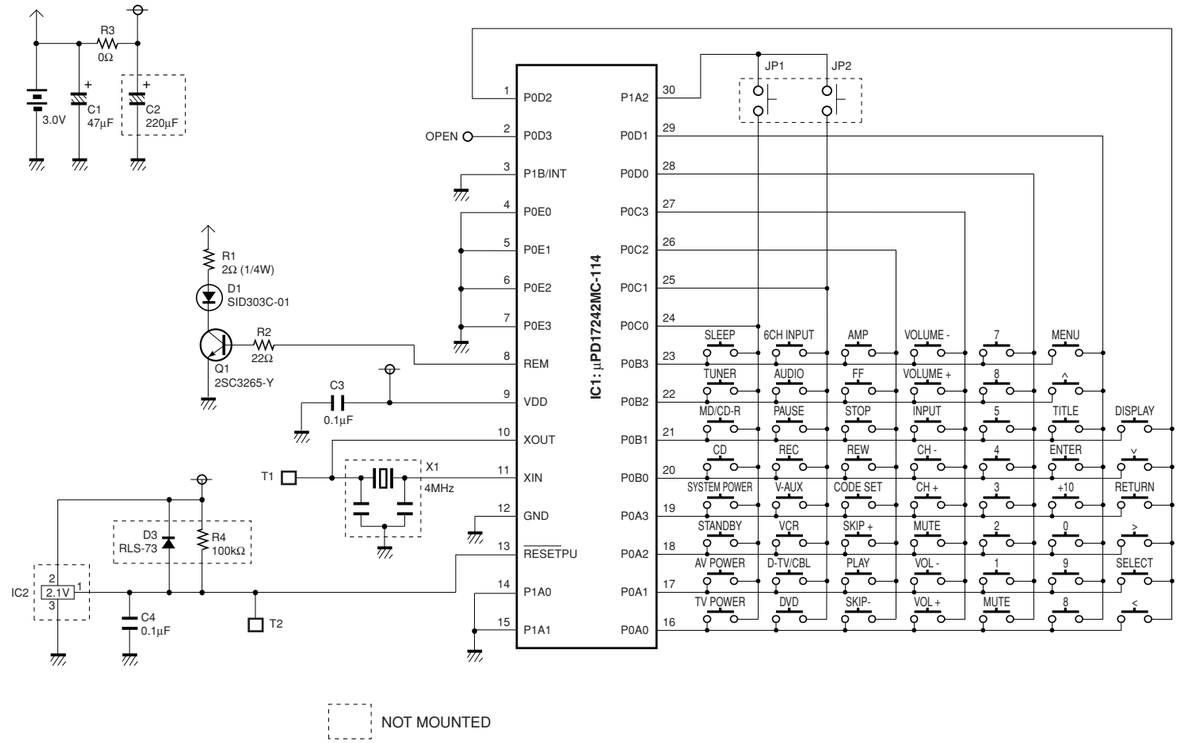

NOT MOUNTED

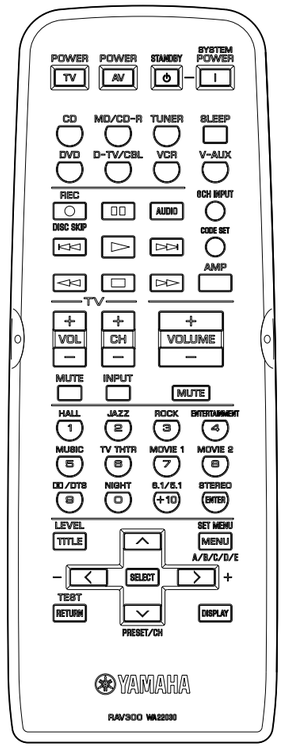

Key No.	Function	CODE								
		AMP	CD	MD	CD-R	TUNER	DVD (P)	DVD (Y)	DVD (M)	DVD-R (P)
1	TV POWER	–	–	–	–	–	–	–	–	–
2	AV POWER	–	–	–	7F-80	–	A5-AA	7C-80	3D-8D	A5-AA
3	STANDBY	7A-1E	–	–	–	–	–	–	–	–
4	SYSTEM POWER	7A-1D	–	–	–	–	–	–	–	–
5	CD	7A-15	–	–	–	–	–	–	–	–
6	MD/CD-R	7A-C9	–	–	–	–	–	–	–	–
7	TUNER	7A-16	–	–	–	–	–	–	–	–
8	SLEEP	7A-57	–	–	–	–	–	–	–	–
9	DVD	7A-C1	–	–	–	–	–	–	–	–
10	D-TV/CBL	7A-54	–	–	–	–	–	–	–	–
11	VCR	7A-0F	–	–	–	–	–	–	–	–
12	V-AUX	7A-55	–	–	–	–	–	–	–	–
13	REC, DISC SKIP	–	7A-4F	79-AF	–	–	55-56	7C-8B	–	56-5A
14	PAUSE	–	7A-09	79-A9	7F-83	–	AA-5A	7C-83	06-B6	AA-5A
15	AUDIO	–	–	–	–	–	95-A6	7C-AD	33-83	95-A6
16	6CH INPUT	7A-87	–	–	–	–	–	–	–	–
17	SKIP -	–	7A-0B	79-AB	7F-86	–	6A-9A	7CB9	49-F9	6A-9A
18	PLAY	–	7A-08	79-A8	7F-82	–	A5-9A	7C-82	0A-BA	A5-9A
19	SKIP +	–	7A-0A	79-AE	7F-87	–	AA-9A	7C-BA	4A-FA	AA-9A
20	CODE SET	–	–	–	–	–	–	–	–	–
21	REW	–	7A-0D	79-AC	7F-88	–	69-9A	7C-86	04-B4	69-9A
22	STOP	–	7A-09	79-AA	7F-84	–	6A-5A	7C-85	00-B0	6A-5A
23	FF	–	7A-0C	79-AD	7F-89	–	A9-9A	7C-87	05-B5	A9-9A
24	AMP	–	–	–	–	–	–	–	–	–
25	TV VOL +	–	–	–	–	–	–	–	–	–
26	TV VOL –	–	–	–	–	–	–	–	–	–
27	TV MUTE	–	–	–	–	–	–	–	–	–
28	TV CH +	–	–	–	–	–	–	–	–	–
29	TV CH –	–	–	–	–	–	–	–	–	–
30	TV INPUT	–	–	–	–	–	–	–	–	–
31	VOLUME +	7A-1A	–	–	–	–	–	–	–	–
32	VOLUME –	7A-1B	–	–	–	–	–	–	–	–
33	MUTE	7A-1C	–	–	–	–	–	–	–	–
34	1	7A-88	79-11	79-85	7F-91	7A-E5	6A-AA	7C-94	10-A0	6A-AA
35	2	7A-89	79-12	79-86	7F-92	7A-E6	9A-AA	7C-95	11-A1	9A-AA
36	3	7A-8A	79-13	79-87	7F-93	7A-E7	5A-AA	7C-96	12-A2	5A-AA
37	4	7A-8B	79-14	79-88	7F-94	7A-E8	A6-AA	7C-97	13-A3	A6-AA
38	5	7A-8C	79-15	79-89	7F-95	7A-E9	66-AA	7C-98	14-A4	66-AA
39	6	7A-8D	79-16	79-8A	7F-96	7A-EA	96-AA	7C-99	15-A5	96-AA
40	7	7A-8E	79-17	79-8B	7F-97	7A-EB	56-AA	7C-9A	16-A6	56-AA
41	8	7A-8F	79-18	79-8C	7F-98	7A-EC	A9-AA	7C-9B	17-A7	A9-AA
42	9	7A-90	79-19	79-8D	7F-99	–	69-AA	7C-9C	18-A8	69-AA
43	0	7A-95	79-10	79-8E	7F-90	–	AA-AA	7C-93	19-A9	AA-AA
44	+10	7A-97	79-1A	79-8F	7F-9A	–	A9-56	7C-9D	89-39	A9-56
45	ENTER	7A-56	79-0B	–	7F-8A	–	A9-A5	7C-9E	–	A9-A5
46	TITLE	7A-86	–	–	–	–	6A-56	7C-B1	9B-2B	6A-56
47	^	7A-98	–	–	–	7A-10	A9-66	7C-B4	85-35	A9-66
48	MENU	7A-9C	–	–	–	7A-12	A6-66	7C-B2	80-30	A6-66
49	<	7A-53	–	–	–	–	99-66	7C-B5	87-37	99-66
50	SELECT	–	–	–	–	–	A5-66	7C-B8	82-32	A5-66
51	>	7A-52	–	–	–	–	59-66	7C-B6	88-38	59-66
52	RETURN	7A-85	–	–	–	–	5A-A9	7C-B7	81-31	5A-A9
53	v	7A-99	–	–	–	7A-11	69-66	7C-B3	86-36	69-66
54	DISPLAY	–	79-0A	79-A5	7F-9E	–	55-AA	7C-A6	92-22	55-AA

RX-V540/RX-V540RDS/HTR-5650/HTR-5650RDS/DSP-AX540
RX-V440/RX-V440RDS/HTR-5640/HTR-5640RDS/DSP-AX440

YAMAHA